

Technical Information

Liquiphant FTL41

Vibronic

Level switch for liquids



Application

- Level switch for all liquids, for minimum or maximum detection in vessels, e.g. process tanks, storage tanks and piping, even in hazardous areas
- Process temperature range: -40 to +150 °C (-40 to +302 °F)
- Pressures up to 40 bar (580 psi)
- Viscosities up to 10 000 mPa·s
- Ideal substitute for float switches as reliable function is not affected by flow, turbulence, air bubbles, foam, vibration, solids content or buildup.

Benefits

- No calibration needed: Quick, low-cost commissioning
- No mechanically moving parts: No maintenance, no wear, long operating life
- Functional safety: Monitoring of vibration frequency of the tuning fork

Table of contents

About this document	4	Influence of the process temperature	12
Symbols	4	Influence of the process pressure	12
Function and system design	5	Influence of the process medium density (at room temperature and normal pressure)	12
Measuring principle	5		
Measuring system	5		
Input	5		
Measured variable	5	Installation	13
Measuring range	5	Mounting location, orientation	13
Output	5	Installation instructions	13
Output and input variants	5	Installing the device in piping	15
Output signal	6	Aligning the cable entry	15
Ex connection data	6	Special installation instructions	16
3-wire DC PNP (electronic insert FEL42)	6		
Supply voltage	6	Environment	17
Power consumption	6	Ambient temperature range	17
Current consumption	6	Storage temperature	18
Load current	6	Humidity	18
Residual current	6	Operating altitude	18
Residual voltage	6	Climate class	18
Behavior of output signal	6	Degree of protection	18
Terminals	6	Vibration resistance	19
Ovvoltage protection	7	Shock resistance	19
Terminal assignment	7	Mechanical load	19
Behavior of the switch output and signaling	7	Pollution degree	19
Universal current connection with relay output (electronic insert FEL44)	7	Electromagnetic compatibility (EMC)	19
Supply voltage	8		
Power consumption	8	Process	19
Connectable load	8	Process temperature range	19
Behavior of output signal	8	Thermal shock	19
Terminals	8	Process pressure range	19
Ovvoltage protection	8	Overpressure limit	20
Terminal assignment	9	Density	20
Behavior of the switch output and signaling	9	Viscosity	20
2-wire NAMUR > 2.2 mA/< 1.0 mA (electronic insert FEL48)	9	Pressure tightness	20
Supply voltage	10	Solids contents	21
Power consumption	10		
Behavior of output signal	10	Mechanical construction	21
Terminals	10	Design, dimensions	21
Ovvoltage protection	10	Dimensions	21
Terminal assignment	10	Weight	28
Behavior of the switch output and signaling	11	Materials	28
Performance characteristics	11	Surface roughness	30
Reference operating conditions	11		
Take switch point into consideration	11	Operability	30
Maximum measurement error	12	Operation concept	30
Hysteresis	12	Local operation	30
Non-repeatability	12		
Certificates and approvals	31		
CE mark	31		
RCM marking	31		
Ex approval	32		
General material compliance	32		
Overfill protection system	32		
Marine approvals	32		
CRN approval	32		
Pressure equipment with permitted pressure less than 200 bar, no pressure-bearing volume	32		
Process seal as per ANSI/ISA 12.27.01	32		

EAC conformity	32
ASME B 31.3/31.1	32
Ordering information	33
Service	33
Test reports, declarations and inspection certificates	33
Test, certificate, declaration	33
TAG	33
Accessories	34
Weather protection cover, plastic, XW111	34
M12 socket	34
Sliding sleeves for unpressurized operation	34
High pressure sliding sleeves	35
Weld-in adapter	37
Documentation	37
Standard documentation	37
Supplementary device-dependent documentation	37

About this document

Symbols	Safety symbols
	DANGER
	This symbol alerts you to a dangerous situation. Failure to avoid this situation will result in serious or fatal injury.
	WARNING
	This symbol alerts you to a potentially dangerous situation. Failure to avoid this situation can result in serious or fatal injury.
	CAUTION
	This symbol alerts you to a potentially dangerous situation. Failure to avoid this situation can result in minor or medium injury.
	NOTICE
	This symbol alerts you to a potentially harmful situation. Failure to avoid this situation can result in damage to the product or something in its vicinity.
Electrical symbols	
	 Ground connection
	Grounded clamp, which is grounded via a grounding system.
	 Protective earth (PE)
	Ground terminals, which must be grounded prior to establishing any other connections. The ground terminals are located on the inside and outside of the device.
Symbols for certain types of Information	
	 Permitted
	Procedures, processes or actions that are permitted.
	 Forbidden
	Procedures, processes or actions that are forbidden.
	 Tip
	Indicates additional information
	 Reference to documentation
	 Reference to another section
	 1, 2, 3 Series of steps
Symbols in graphics	
	A, B, C ... View
	1, 2, 3 ... Item numbers
	 Hazardous area
	 Safe area (non-hazardous area)
Graphic conventions	
	 Installation, explosion and electrical connection drawings are presented in simplified format
	Devices, assemblies, components and dimensional drawings are presented in reduced-line format
	Dimensional drawings are not to-scale representations; the dimensions indicated are
	rounded off to 2 decimal places
	Unless otherwise described, flanges are presented with sealing surface form EN 1091-1, B2; ASME B16.5, RF; JIS B2220, RF

Function and system design

Measuring principle

The sensor's vibrating fork vibrates at its natural frequency. As soon as the liquid covers the vibrating fork, the oscillation frequency decreases. The change in frequency causes the level switch to switch.

Point level measurement

Maximum or minimum detection for liquids in tanks or pipes in all industries. Suitable for leakage monitoring, pump dry-running protection or overfill prevention, for example.

Specific versions are suitable for use in hazardous areas.

The level switch differentiates between the "covered" and "not covered" conditions.

Depending on the MIN (minimum detection) or MAX (maximum detection) modes, there are two possibilities in each case: OK status and demand mode.


OK status

- In MIN mode, the vibrating fork is covered, e.g. pump dry-run protection
- In MAX mode, the vibrating fork is not covered, e.g. overfill protection

Demand mode

- In MIN mode, the vibrating fork is not covered, e.g. pump dry-run protection
- In MAX mode, the vibrating fork is covered, e.g. overfill protection system

Measuring system

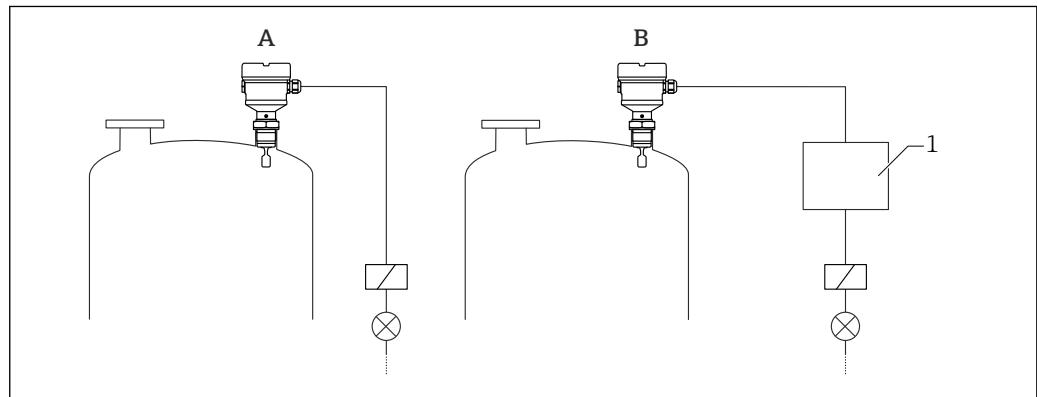

A0035308

Figure 1 Example of a measuring system

A Device for direct connection of a load

B Device for connection to a separate switching unit or PLC

1 Switching unit, PLC etc.

Input

Measured variable

The point level signal is triggered according to the operating mode (minimum or maximum detection) when the level exceeds or falls below the relevant point level.

Measuring range

Depends on the installation location and the pipe extension ordered

Output

Output and input variants

Electronic inserts

3-wire DC PNP (FEL42)

- Three-wire direct current version
- Switches the load via the transistor (PNP) and separate connection, e.g. in conjunction with programmable logic controllers (PLC)

Universal current connection, relay output (FEL44)
Switches the loads via two potential-free change-over contacts

2-wire NAMUR > 2.2 mA / < 1.0 mA (FEL48)

- For separate switching unit
- Signal transmission H-L edge 2.2 to 3.8 mA/0.4 to 1.0 mA as per IEC 60947-5-6 (NAMUR) on two-wire cable

Output signal

Switching output

Preset switching delay times can be ordered:

- 0.5 s when the vibrating fork is covered and 1.0 s when the vibrating fork is uncovered (factory setting)
- 0.25 s when the vibrating fork is covered and 0.25 s when the vibrating fork is uncovered
- 1.5 s when the vibrating fork is covered and 1.5 s when the vibrating fork is uncovered
- 5.0 s when the vibrating fork is covered and 5.0 s when the vibrating fork is uncovered

Ex connection data

See safety instructions (XA): All data relating to explosion protection are provided in separate Ex documentation and are available from the Downloads area of the Endress+Hauser website. The Ex documentation is supplied as standard with all devices approved for use in explosion hazardous areas.

3-wire DC PNP (electronic insert FEL42)

- Three-wire direct current version
- Switches the load via the transistor (PNP) and separate connection, e.g. in conjunction with programmable logic controllers (PLC), DI modules according to EN 61131-2

Supply voltage

⚠ WARNING

Failure to use the prescribed power supply unit.

Risk of potentially life-threatening electric shock!

- The FEL42 may only be powered by power supply units with reliable galvanic isolation in accordance with IEC 61010-1.

$U = 10 \text{ to } 55 \text{ V}_{\text{DC}}$



The device must be powered by a voltage supply categorized as "CLASS 2" or "SELV".



Comply with the following according to IEC 61010-1: Provide a suitable circuit breaker for the device and limit the current to 500 mA, e.g. by installing a 0.5 A fuse (slow-blow) in the power supply circuit.

Power consumption

$P < 0.5 \text{ W}$

Current consumption

$I \leq 10 \text{ mA}$ (without load)

The red LED flashes in the event of an overload or short-circuit. Check for an overload or short-circuit every 5 s.

Load current

$I \leq 350 \text{ mA}$ with overload and short-circuit protection

Residual current

$I < 100 \mu\text{A}$ (for blocked transistor)

Residual voltage

$U < 3 \text{ V}$ (for switched through transistor)

Behavior of output signal

- OK status: Switched through
- Demand mode: Blocked
- Alarm: Blocked

Terminals

Terminals for cable cross-section up to 2.5 mm^2 (14 AWG). Use ferrules for the wires.

Overvoltage protection

Overvoltage category I

Terminal assignment

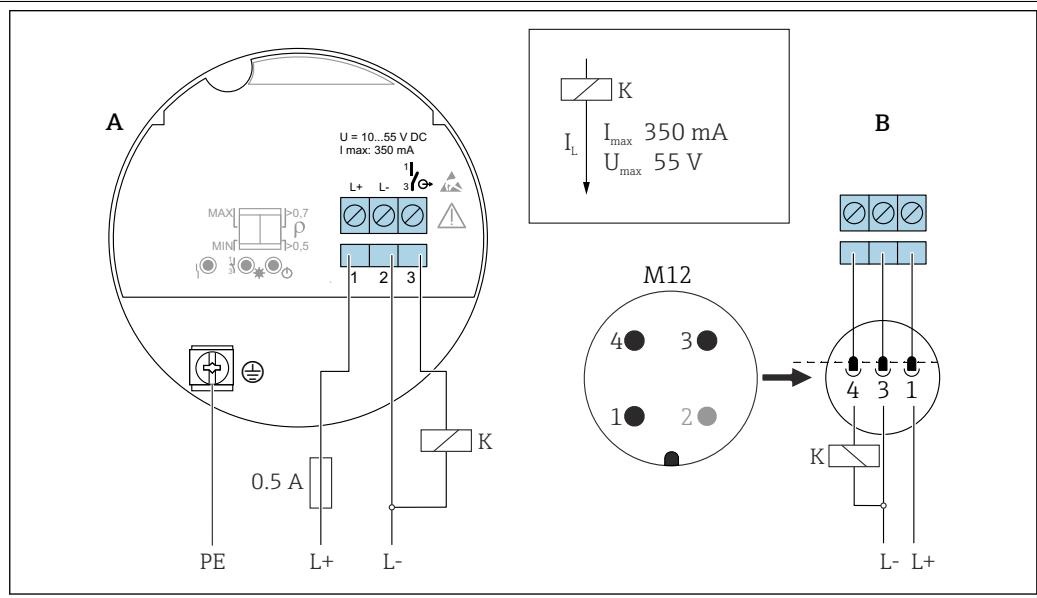


Fig. 2 Terminal assignment FEL42

A Terminal assignment at electronic insert

B Terminal assignment at M12 plug according to EN61131-2 standard

Behavior of the switch output and signaling

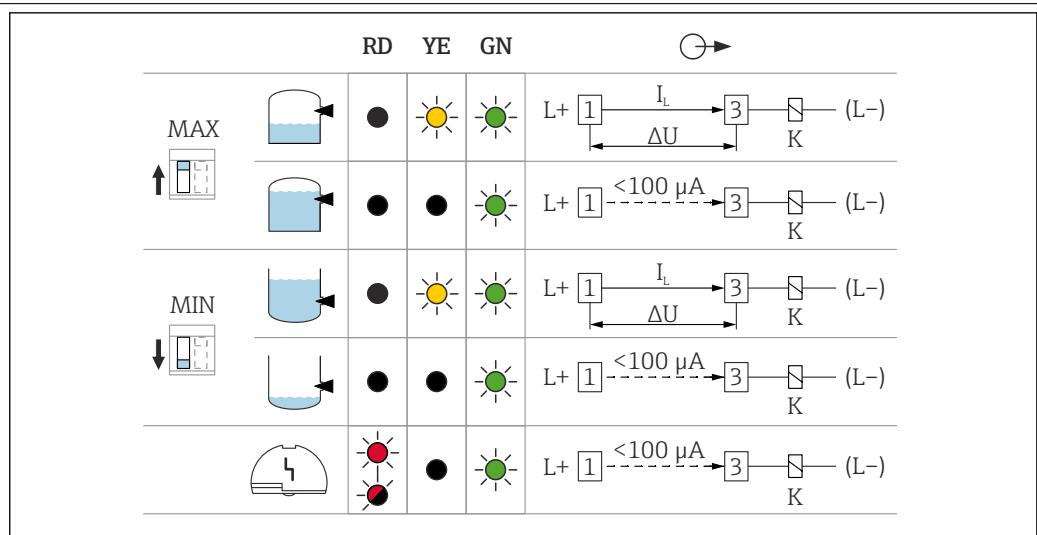


Fig. 3 FEL42 switching behavior, signaling LED

MAXDIP switch for setting the MAX safety

MIN DIP switch for setting the MIN safety

RD LED red for warning or alarm

YE LED yellow, switch status

GN LED green, operational status, device on

I_L Load current switched through

Universal current connection with relay output (electronic insert FEL44)

- Switches the loads via two potential-free change-over contacts
- Two separate change-over contacts (DPDT)


⚠ WARNING

An error at the electronic insert can cause the permitted temperature for touch-safe surfaces to be exceeded. This presents a risk of burns.

- Do not touch the electronics in the event of an error!

Supply voltage	U= 19 to 253 V _{AC} /19 to 55 V _{DC}
	<p>i Comply with the following according to IEC 61010-1: Provide a suitable circuit breaker for the device and limit the current to 500 mA, e.g. by installing a 0.5 A fuse (slow-blow) in the power supply circuit.</p>
Power consumption	S < 25 VA, P < 1.3 W
Connectable load	<p>Loads switched via two potential-free change-over contacts (DPDT)</p> <ul style="list-style-type: none"> ■ I_{AC} ≤ 6 A, U~ ≤ AC 253 V; P~ ≤ 1 500 VA, cos φ = 1, P~ ≤ 750 VA, cos φ > 0.7 ■ I_{DC} ≤ 6 A to DC 30 V, I_{DC} ≤ 0.2 A to 125 V <p>i Additional restrictions for the connectable load depend on the selected approval. Pay attention to the information in the Safety Instructions (XA).</p> <p>According to IEC 61010, the following applies: Total voltage from relay outputs and auxiliary power supply ≤ 300 V.</p> <p>Use electronic insert FEL42 DC PNP for small DC load currents, e.g. for connection to a PLC.</p> <p>Relay contact material: Silver/nickel AgNi 90/10</p> <p>When connecting a device with high inductance, provide a spark quenching unit to protect the relay contact. A fine-wire fuse (depending on the connected load) protects the relay contact in the event of a short-circuit.</p> <p>Both relay contacts switch simultaneously.</p>
Behavior of output signal	<ul style="list-style-type: none"> ■ OK status: Relay energized ■ Demand mode: Relay de-energized ■ Alarm: Relay de-energized
Terminals	Terminals for cable cross-section up to 2.5 mm ² (14 AWG). Use ferrules for the wires.
Overvoltage protection	Overvoltage category II

Terminal assignment

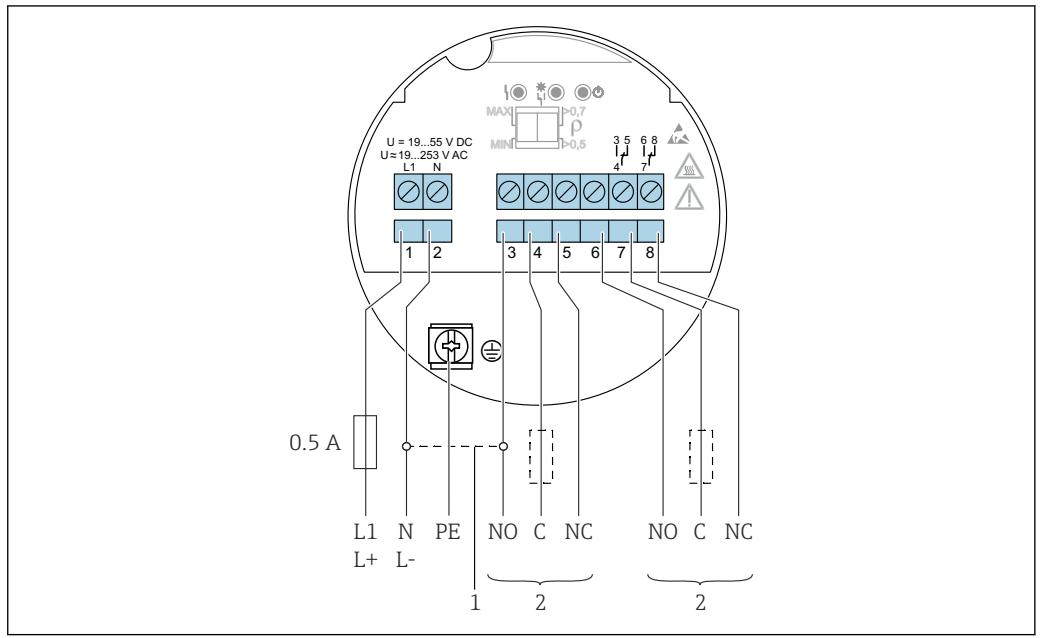


A0036057

图 4 Universal current connection with relay output, electronic insert FEL44

1 When bridged, the relay output works with NPN logic
 2 Connectable load

Behavior of the switch output and signaling

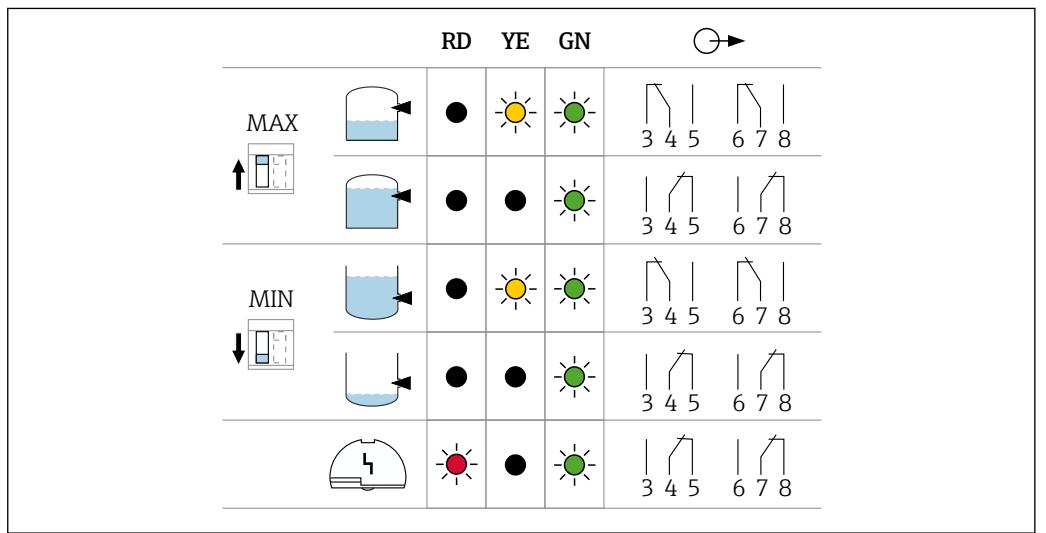

A0033513

图 5 FEL44 switching behavior, signaling LED

MAXDIP switch for setting the MAX safety

MIN DIP switch for setting the MIN safety

RD LED red for alarm


YE LED yellow, switch status

GN LED green, operational status, device on

2-wire NAMUR > 2.2 mA / < 1.0 mA (electronic insert FEL48)


- To connect to isolating amplifiers according to NAMUR (IEC 60947-5-6), e.g. Nivotester FTL325N from Endress+Hauser
- To connect to isolating amplifiers of third-party suppliers according to NAMUR (IEC 60947-5-6), a permanent power supply for electronic insert FEL48 must be ensured
- Signal transmission H-L edge 2.2 to 3.8 mA/0.4 to 1.0 mA according to NAMUR (IEC 60947-5-6) on two-wire cabling

Supply voltage	U = 8.2 V _{DC}
	 The device must be powered by a voltage supply categorized as "CLASS 2" or "SELV".
	 Comply with the following according to IEC 61010-1: Provide a suitable circuit breaker for the device.
Power consumption	P < 50 mW
Behavior of output signal	<ul style="list-style-type: none"> OK status: Current 2.2 to 3.8 mA Demand mode: Current 0.4 to 1.0 mA Alarm: Current 0.4 to 1.0 mA
Terminals	Terminals for cable cross-section up to 2.5 mm ² (14 AWG). Use ferrules for the wires.
Oversupply protection	Oversupply category I

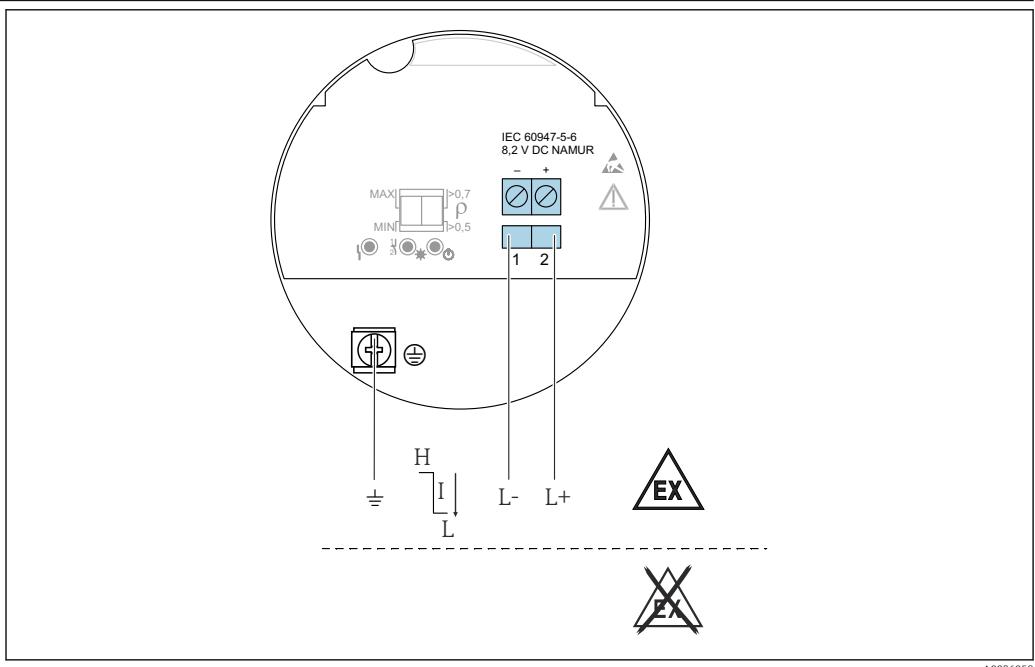Terminal assignment

 6 2-wire NAMUR $\geq 2.2 \text{ mA} / \leq 1.0 \text{ mA}$, electronic insert FEL48

Behavior of the switch output and signaling

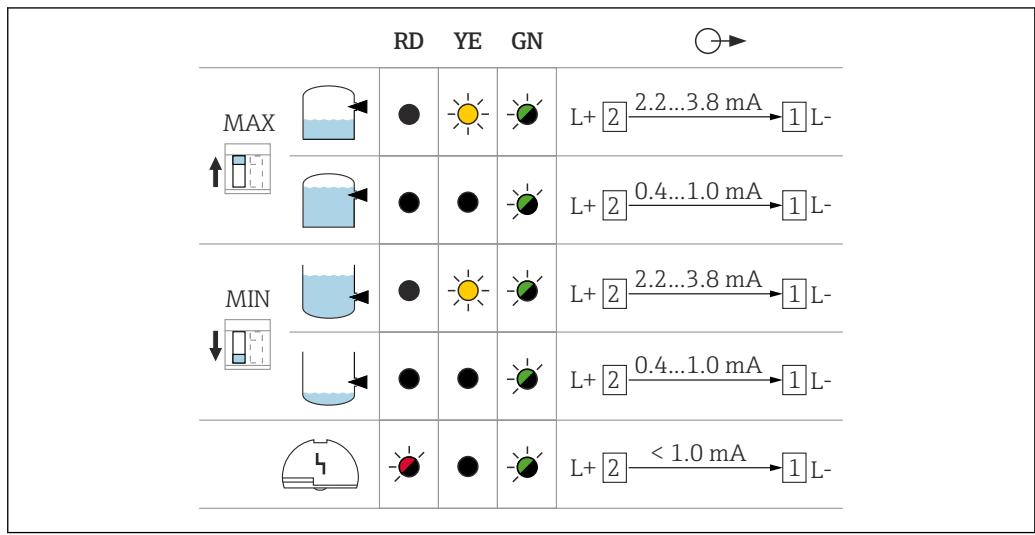

A0037694

Fig. 7 FEL48 switching behavior and signaling

MAXDIP switch for setting the MAX safety

MIN DIP switch for setting the MIN safety

RD LED red for alarm

YE LED yellow, switch status

GN LED green, operational status, device on

Performance characteristics

Reference operating conditions


- As per IEC 62828-2
- Ambient temperature: +23 °C (+73 °F)
- Process temperature: +23 °C (+73 °F)
- Humidity $\varphi = \text{constant}$, in the range: 5 to 80% rF $\pm 5\%$
- Medium density (water): 1 g/cm³ (62.4 lb/ft³)
- Medium viscosity: 1 mPa·s
- Atmospheric pressure $p_A = \text{constant}$, in the range: 860 to 1 060 mbar (12.47 to 15.37 psi)
- Process pressure: Atmospheric pressure/unpressurized
- Sensor installation: Vertically and from above
- Density selection switch: > 0.7 g/cm³ (43.7 lb/ft³)
- Switch direction of sensor: Uncovered to covered
- Supply voltage: DC 24 V $\pm 3\%$

Take switch point into consideration

The following are typical switch points, depending on the orientation of the level switch.

Water +23 °C (+73 °F)

 Minimum distance between the tuning fork and the tank wall or pipe wall: 10 mm (0.39 in)

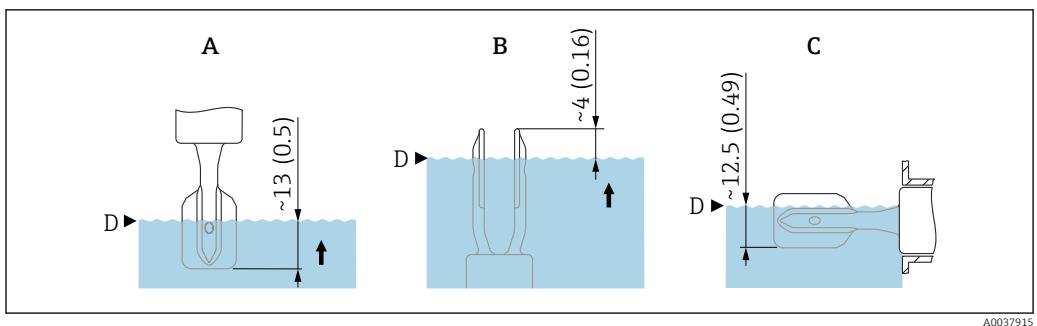

■ 8 Typical switch points. Unit of measurement mm (in)

- A Installation from above
- B Installation from below
- C Installation from the side
- D Switch point

A0037915

Maximum measurement error At reference operating conditions: max. ± 1 mm (0.04 in) at switch point


Hysteresis Typically 2.5 mm (0.1 in)

Non-repeatability 0.5 mm (0.02 in)

Influence of the process temperature The switch point moves between +1.4 to -2.6 mm (+0.06 to -0.1 in) in the temperature range from -40 to +150 °C (-40 to +302 °F)

Influence of the process pressure The switch point moves between 0 to 2.6 mm (0 to 0.1 in) in the pressure range from -1 to +40 bar (-14.5 to +580 psi)

Influence of the process medium density (at room temperature and normal pressure)

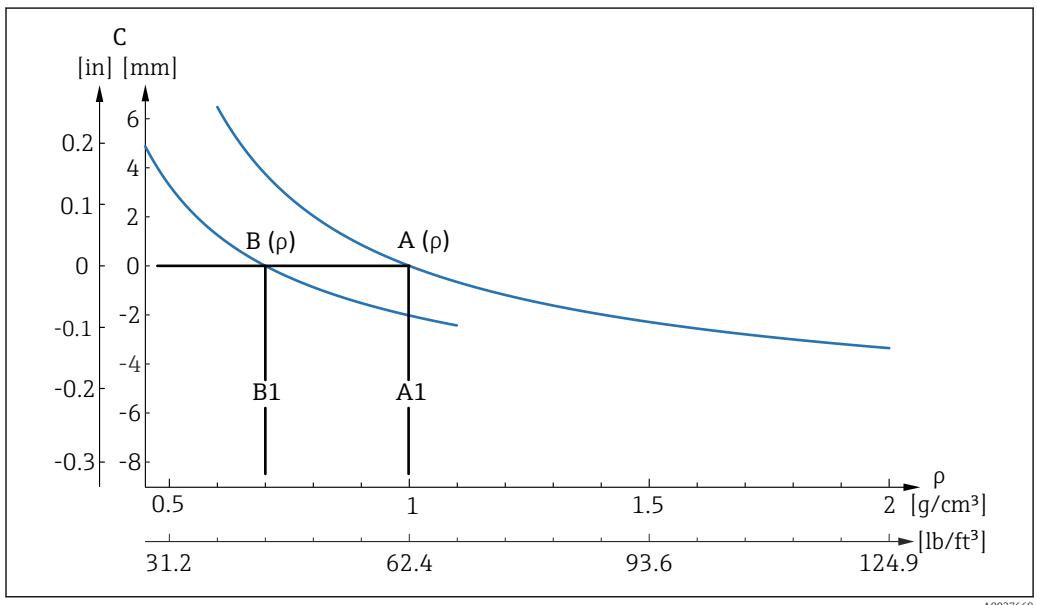

■ 9 Switch point deviation over density, 316L

- A Density switch setting (ρ) $> 0.7 \text{ g/cm}^3 (43.7 \text{ lb/ft}^3)$
- A1 Reference operating condition $\rho = 1 \text{ g/cm}^3 (62.4 \text{ lb/ft}^3)$
- B Density switch setting (ρ) $> 0.5 \text{ g/cm}^3 (31.21 \text{ lb/ft}^3)$
- B1 Reference operating condition $\rho = 0.7 \text{ g/cm}^3 (43.7 \text{ lb/ft}^3)$
- C Switch point deviation

A0037669

Density setting


- $TC_{typ.}$, [mm/10 k]
 - $\rho > 0.7 \text{ g/cm}^3 (43.7 \text{ lb/ft}^3)$: -0.2
 - $\rho > 0.5 \text{ g/cm}^3 (31.21 \text{ lb/ft}^3)$: -0.2
- $Pressure_{typ.}$, [mm/10 bar]
 - $\rho > 0.7 \text{ g/cm}^3 (43.7 \text{ lb/ft}^3)$: -0.3
 - $\rho > 0.5 \text{ g/cm}^3 (31.21 \text{ lb/ft}^3)$: -0.4

Installation

Mounting location, orientation

Mounting instructions

- Any orientation for compact version or version with a pipe length up to approx. 500 mm (19.7 in)
- Vertical orientation from above for device with long pipe
- Minimum distance between the tuning fork and the tank wall or pipe wall: 10 mm (0.39 in)

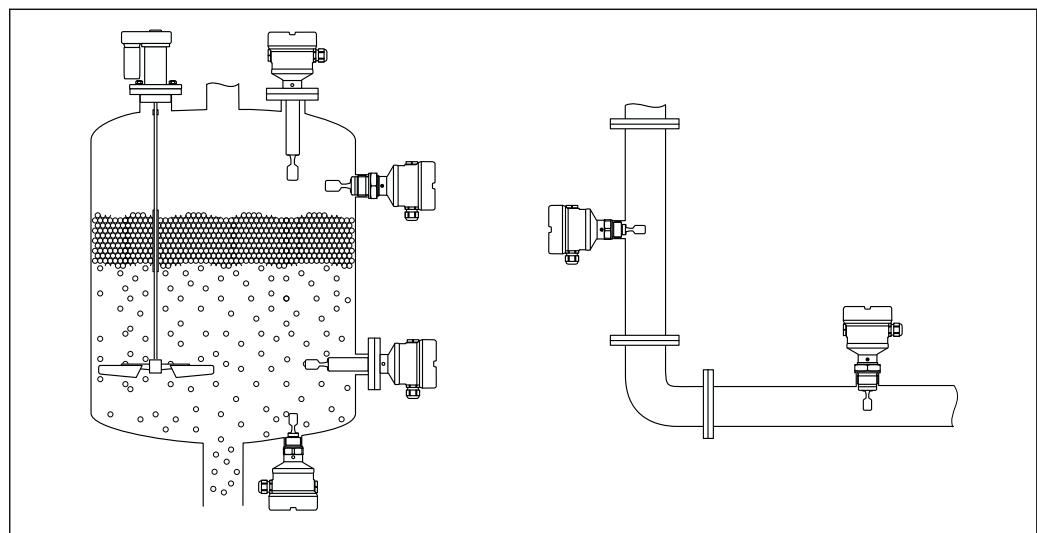

A0036954

10 Installation examples for a vessel, tank or pipe

Installation instructions

Take viscosity into consideration



Viscosity values


- Low viscosity: < 2 000 mPa·s
- High viscosity: > 2 000 to 10 000 mPa·s

Low viscosity



- Low viscosity, e.g. water: < 2 000 mPa·s

It is permitted to position the tuning fork within the installation socket.

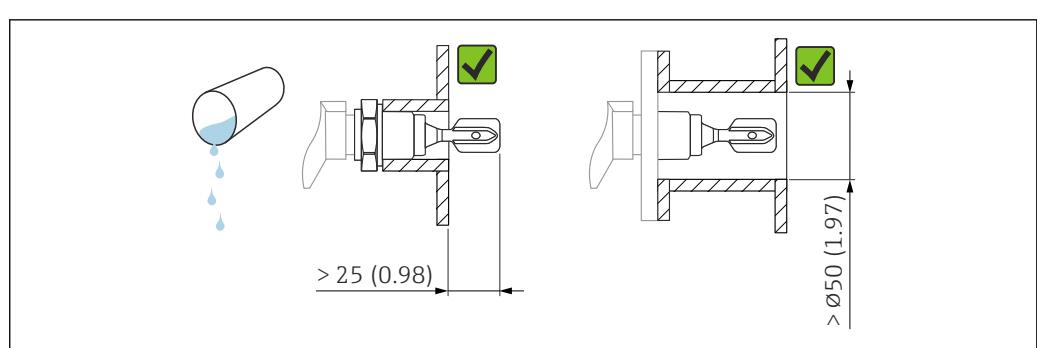

A0033297


11 Installation example for low-viscosity liquids. Unit of measurement mm (in)

*High viscosity***NOTICE****Highly viscous liquids may cause switching delays.**

- Make sure that the liquid can run off the tuning fork easily.
- Deburr the socket surface.

i High viscosity, e.g. viscous oils: $\leq 10\,000 \text{ mPa}\cdot\text{s}$


The tuning fork must be located outside the installation socket!

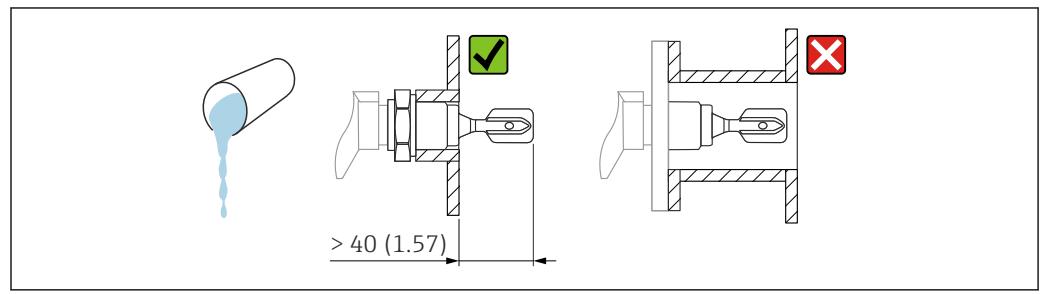

■ 12 Installation example for a highly viscous liquid. Unit of measurement mm (in)

Avoid buildup


- Use short installation sockets to ensure that the tuning fork projects freely into the vessel
- Leave sufficient distance between the buildup expected on the tank wall and the tuning fork

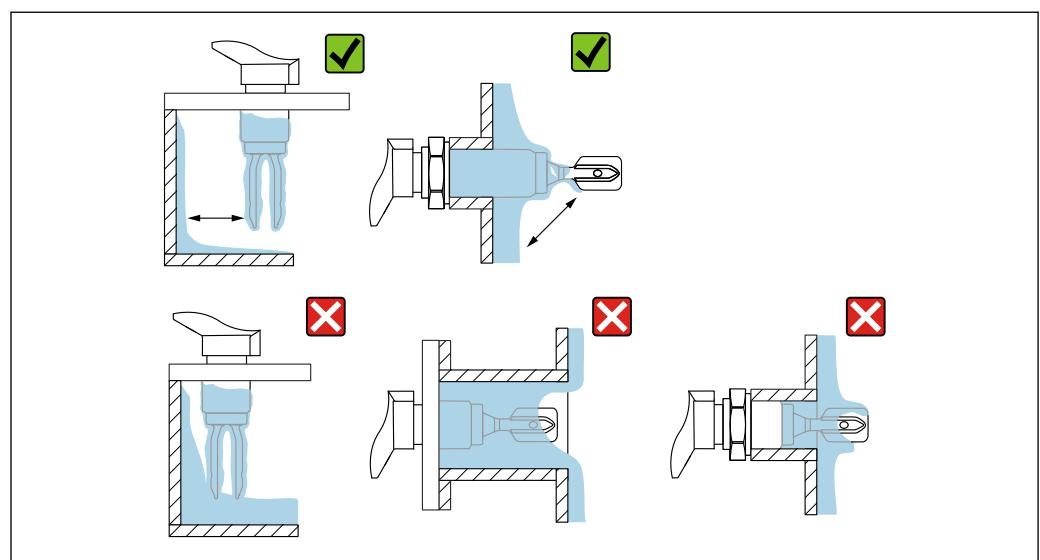

■ 13 Installation examples for a highly viscous process medium

Take clearance into consideration

Allow sufficient space outside the tank for mounting, connection and settings involving the electronic insert.

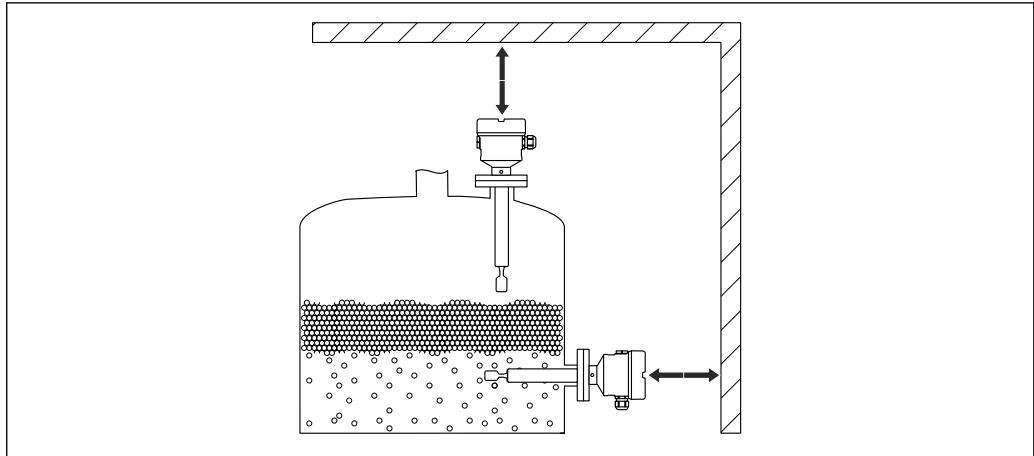


■ 14 Take clearance into consideration

Align the vibrating fork using the marking

The vibrating fork can be aligned using the marking in such a way that the medium drains off easily and buildup is avoided.

- Markings for threaded connections: Circle (material specification/thread designation opposite)
- Markings for flange or clamp connections: Line or double line


i In addition, the threaded connections have a matrix code that is **not** used for alignment.

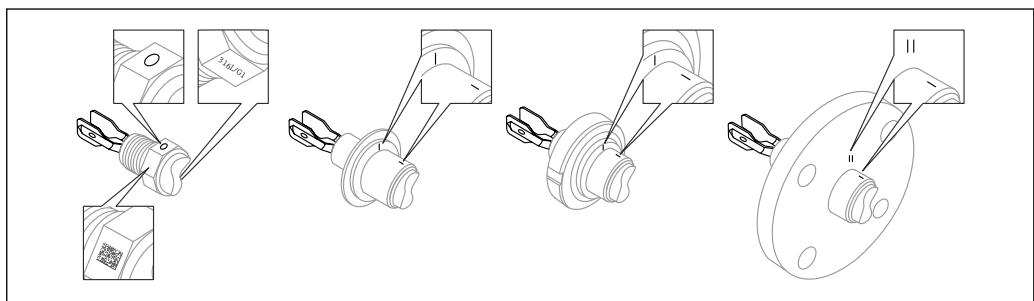

■ 15 Position of the vibrating fork when installed horizontally in the vessel using the marking

Installing the device in piping

- Flow velocity up to 5 m/s with a viscosity of 1 mPa·s and density of 1 g/cm³ (62.4 lb/ft³) (SGU). Check for correct functioning in the event of other process medium conditions.
- The flow will not be significantly impeded if the tuning fork is correctly aligned and the marking is pointing in the direction of flow.
- The marking is visible when installed

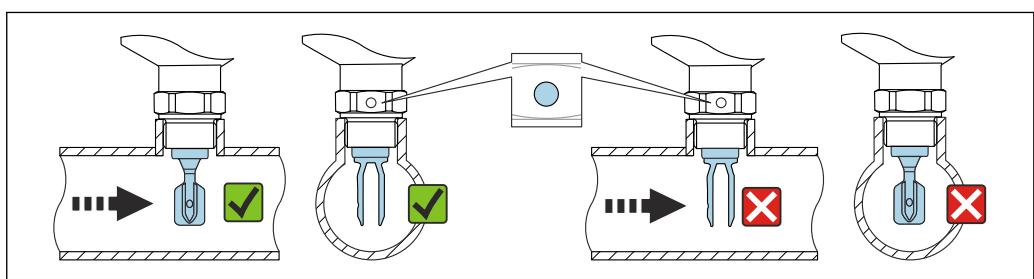


■ 16 Installation in pipes (take fork position and marking into consideration)

Aligning the cable entry

All housings can be aligned. Forming a drip loop on the cable prevents moisture from entering the housing.

Housing without set screw

The device housing can be rotated up to 350°.

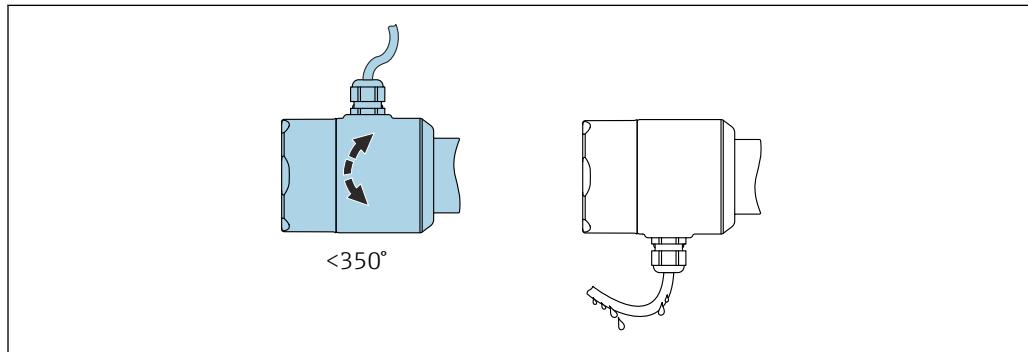

A0052359


■ 17 Housing without set screw; form a drip loop on the cable.

Housing with set screw



In the case of housings with locking screw:

- The housing can be turned and the cable aligned by loosening the locking screw. A cable loop for draining prevents moisture in the housing.
- The locking screw is not tightened when the device is delivered.

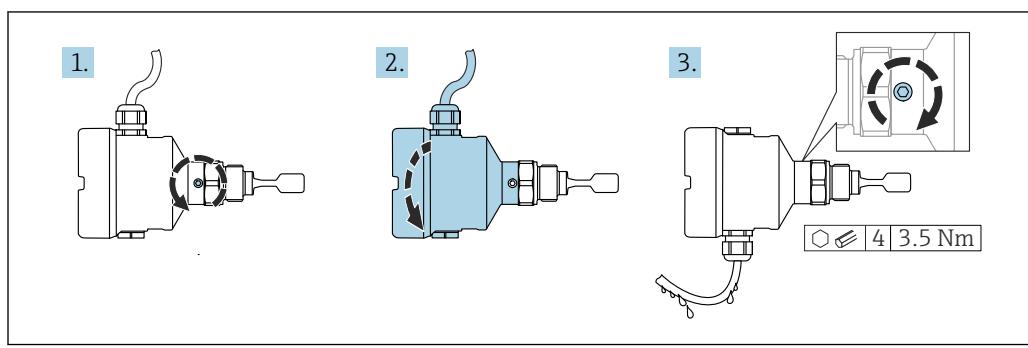


A0037347

■ 18 Housing with external set screw; form a drip loop on the cable

Special installation instructions

Vessel with heat insulation

If process temperatures are high, the device should be included in the vessel insulation system to prevent the electronics from heating as a result of thermal radiation or convection. The insulation in this case should not be higher than the neck of the device.

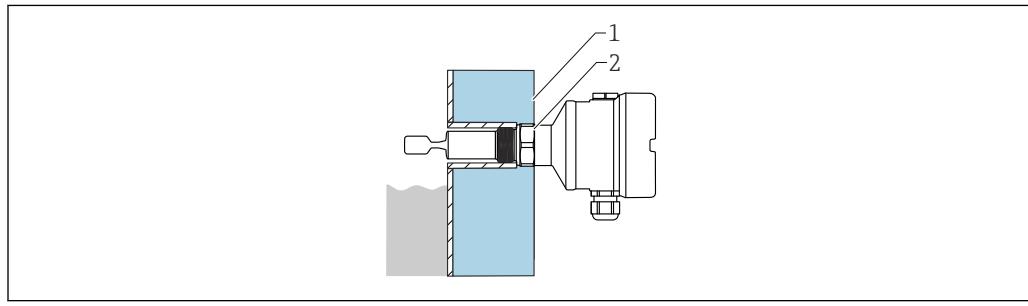


A0051616

■ 19 Example of a vessel with heat insulation

1 Vessel insulation
2 Insulation (up to the housing neck max.)

Support the device

Support the device in the event of severe dynamic load. Maximum lateral loading capacity of the pipe extensions and sensors: 75 Nm (55 lbf ft).

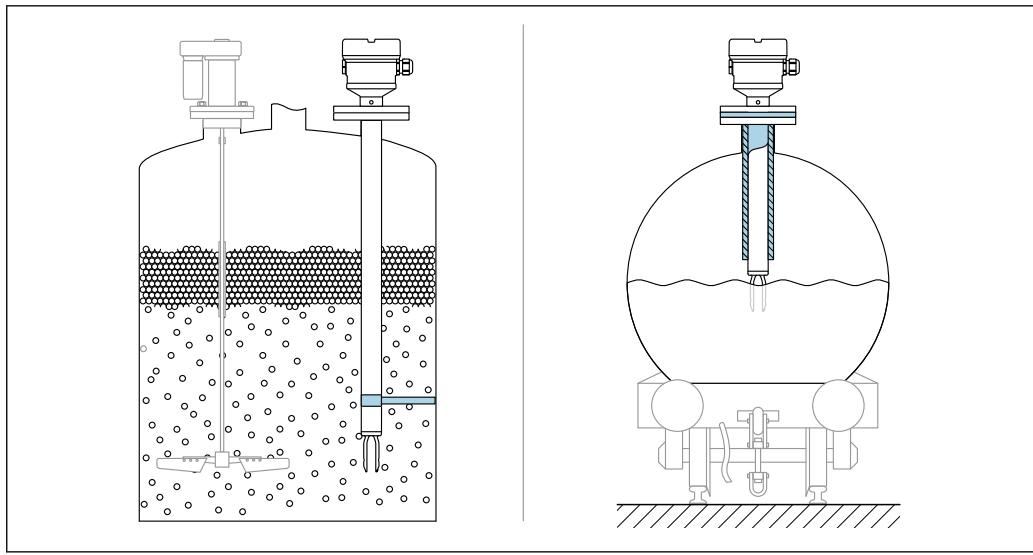


A0031874

图 20 Examples of support in the event of dynamic load

i Marine approval: In the case of pipe extensions or sensors longer than 1 600 mm (63 in), a support is needed at least every 1 600 mm (63 in).

Weld-in adapter with leakage hole

Position the weld-in adapter so that the leakage hole points downwards. This allows any leakage to be detected at an early stage, as the escaping medium becomes visible.

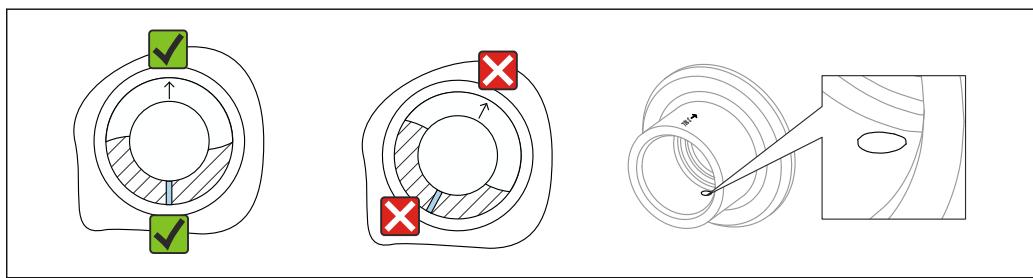

A0039230

图 21 Weld-in adapter with leakage hole

Sliding sleeves

i For more details, see the "Accessories" section.

i Special Documentation SD02398F (Installation Instructions)

Environment

Ambient temperature range

-40 to +70 °C (-40 to +158 °F)

The minimum permitted ambient temperature of the plastic housing is limited to -20 °C (-4 °F); 'indoor use' applies to North America.

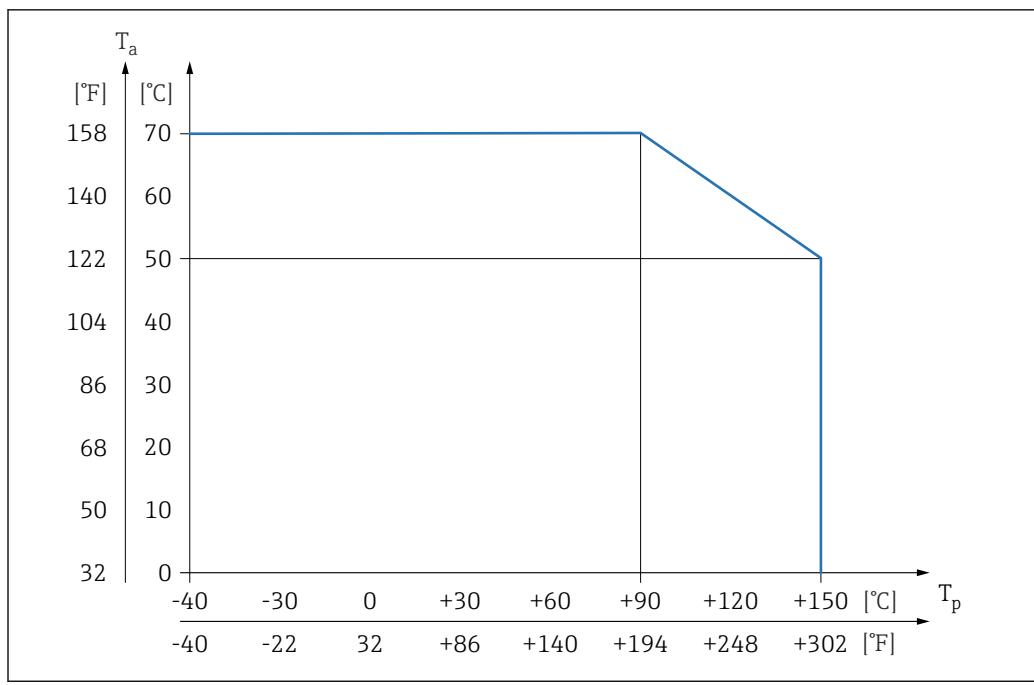


Fig. 22 For FEL44 and process temperature $T_p > 90 \text{ }^\circ\text{C}$ max. load current 4 A

If operating outdoors in strong sunlight:

- Mount the device in a shaded location
- Avoid direct sunlight, particularly in warmer climatic regions
- Use a protective cover, can be ordered as an accessory

Hazardous area

In the hazardous area, the permitted ambient temperature can be limited depending on the zones and gas groups. Pay attention to the information in the Ex documentation (XA).

Storage temperature	-40 to +80 °C (-40 to +176 °F)
Humidity	Operation up to 100 %. Do not open in a condensing atmosphere.
Operating altitude	As per IEC 61010-1 Ed.3: <ul style="list-style-type: none"> ▪ Up to 2 000 m (6 600 ft) above sea level ▪ Can be extended to 3 000 m (9 800 ft) above sea level if overvoltage protection is used
Climate class	As per IEC 60068-2-38 test Z/AD
Degree of protection	Testing according to IEC 60529 and NEMA 250 IP68 test condition: 1.83 m H ₂ O for 24 h
Housing	See cable entries
Cable entries	<ul style="list-style-type: none"> ▪ M20 coupling, plastic, IP66/68 NEMA Type 4X/6P ▪ M20 coupling, nickel-plated brass, IP66/68 NEMA Type 4X/6P ▪ G 1/2 thread, NPT 1/2, NPT 3/4 IP66/68 NEMA Type 4X/6P
Degree of protection for M12 plug	<ul style="list-style-type: none"> ▪ When housing is closed and connection cable is plugged in: IP66/67 NEMA Type 4X ▪ When housing is open or connection cable is not plugged in: IP20, NEMA Type 1

NOTICE**M12 plug: Loss of IP protection class due to incorrect installation!**

- The degree of protection only applies if the connecting cable used is plugged in and screwed tight.
- The degree of protection only applies if the connecting cable used is specified according to IP67 NEMA Type 4X.

 If the "M12 plug" option is selected as the electrical connection, **IP66/67 NEMA Type 4X** applies for all housing types.

Vibration resistance	As per IEC60068-2-64-2008 $a(\text{RMS}) = 50 \text{ m/s}^2$, $f = 5 \text{ to } 2000 \text{ Hz}$, $t = 3 \text{ axes} \times 2 \text{ h}$
Shock resistance	As per IEC 60068-2-27-2008: $300 \text{ m/s}^2 [= 30 g_n] + 18 \text{ ms}$ g_n : standard acceleration of gravity
Mechanical load	Support the device in the event of severe dynamic load. Maximum lateral loading capacity of the pipe extensions and sensors: 75 Nm (55 lbf ft).  For more details, see the "Supporting the device" section.
Pollution degree	Pollution degree 2
Electromagnetic compatibility (EMC)	<ul style="list-style-type: none"> ■ Electromagnetic compatibility as per the EN 61326 series and NAMUR Recommendation EMC (NE 21) ■ Interference immunity according to Table 2 (Industrial), interference radiation according to Group 1 Class B ■ Fulfils the requirements of EN 61326-3-1  For more details, refer to the EU Declaration of Conformity.

Process

Process temperature range	-40 to +150 °C (-40 to +302 °F) Observe pressure and temperature dependency,  see the "Process pressure range of the sensors" section.
Thermal shock	≤ 120 K/s
Process pressure range	PN: 40 bar (580 psi)  The maximum pressure for the device depends on the lowest-rated element with regard to pressure. Components are: process connection, optional mounting parts, or accessories.

⚠ WARNING

Incorrect design or use of the device may lead to bursting parts!


This may result in severe, possibly irreversible injury to persons and environmental hazards.

- ▶ Only operate the device within the specified limits for the components!
- ▶ MWP (maximum working pressure): The maximum working pressure is specified on the nameplate. This value refers to a reference temperature of $+20\text{ }^{\circ}\text{C}$ ($+68\text{ }^{\circ}\text{F}$) and may be applied to the device for an unlimited time. Observe the temperature dependency of the maximum working pressure. For higher temperatures, refer to the following standards for the permitted pressure values for flanges: EN 1092-1 (materials 1.4435 and 1.4404 are identical with regard to their stability/temperature property and are grouped together in under 13EO in EN 1092-1 Tab. 18; the chemical composition of the two materials can be identical), ASME B 16.5a, JIS B 2220 (the latest version of the standard applies in each case).
- ▶ The Pressure Equipment Directive (2014/68/EU) uses the abbreviation "PS". The abbreviation "PS" corresponds to the maximum working pressure of the device.
- ▶ MWP data that deviate from this are provided in the relevant sections of the Technical Information.

The lowest value from the derating curves of the device and of the selected flange applies in each case.

 Canadian CRN approval: more details about the maximum pressure values are available in the download area of the product page under: www.endress.com → Downloads.

Process pressure range of the sensors

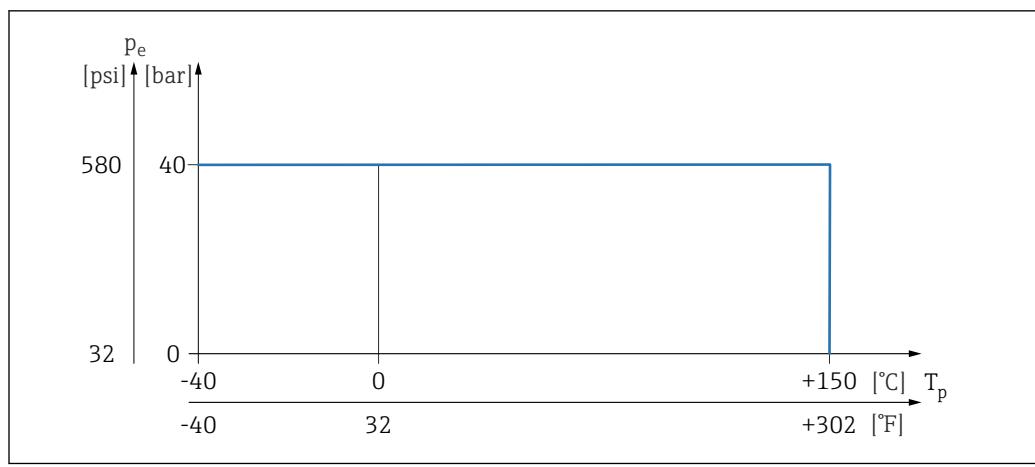

 23 Process temperature FTL41

A0038719

Overpressure limit

$\text{PN} = 40\text{ bar}$ (580 psi): overpressure limit = $1.5 \cdot \text{PN}$ maximum 60 bar (870 psi) depending on the selected process connection

The device function is limited during the pressure test.

Mechanical integrity is guaranteed up to 1.5 times the process nominal pressure PN.

Density

Liquids with density $> 0.7\text{ g/cm}^3$ (43.7 lb/ft 3)

Switch position $> 0.7\text{ g/cm}^3$ (43.7 lb/ft 3), order configuration

Liquids with density 0.5 g/cm^3 (31.2 lb/ft 3)

Switch position $> 0.5\text{ g/cm}^3$ (31.2 lb/ft 3), can be configured via DIP switch

Liquids with density $> 0.4\text{ g/cm}^3$ (25.0 lb/ft 3)

■ Optionally available to order

■ Fixed value that cannot be edited.

The function of the DIP switch is interrupted.

Viscosity

$\leq 10\,000\text{ mPa}\cdot\text{s}$

Pressure tightness

Up to vacuum

 In vacuum evaporation plants, select the 0.4 g/cm^3 (25.0 lb/ft 3)/ density setting.

Solids contents	$\varnothing \leq 5 \text{ mm (0.2 in)}$
-----------------	--

Mechanical construction

Design, dimensions


Device height

The device height consists of the following components:

- Housing including cover
- Compact version, pipe extension or short pipe
- Process connection

The individual heights of the components can be found in the following sections:

- Determine the height of the device and add the individual heights
- Take the installation clearance into consideration (space that is needed to install the device)

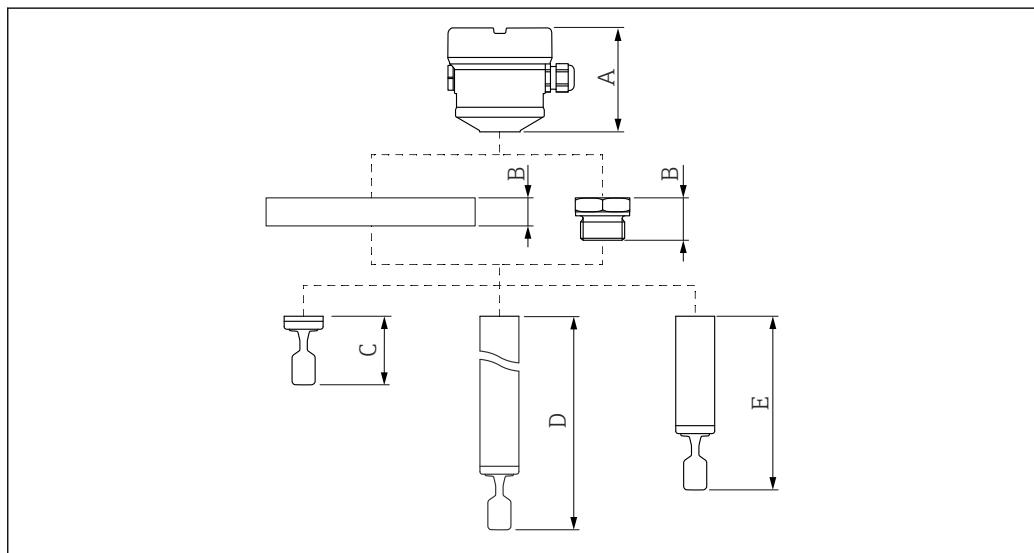

A0036789

24 Components to determine the device height

- A Housing including cover
- B Process connection
- C Compact probe version with tuning fork
- D Pipe extension probe with tuning fork
- E Short pipe version of probe with tuning fork

Dimensions

 The following dimensions are rounded values. As a result, there may be deviations from the specifications in the Product Configurator at www.endress.com.

To view CAD data:

1. Enter www.endress.com in your web browser
2. Search for the device
3. Select the **Configuration** button
4. Configure the device
5. Select the **CAD drawings** button

Housing

All housings can be aligned. The housing alignment can be fixed on housings with a locking screw.

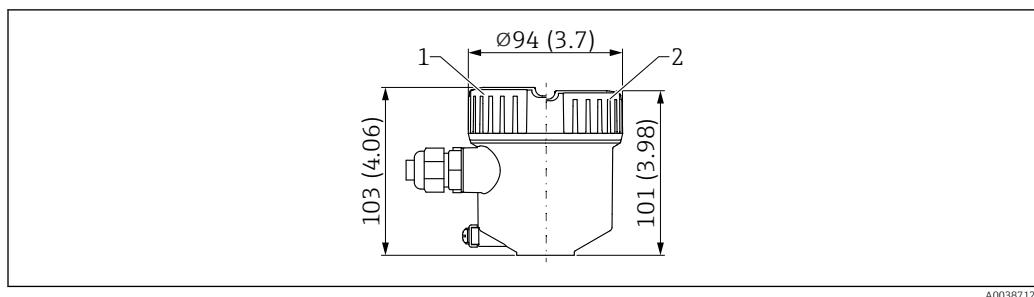
Single compartment housing, plastic

图 25 Dimensions of single compartment housing, plastic. Unit of measurement mm (in)

1 Height with cover with plastic sight glass (optional)
 2 Height with cover without sight glass

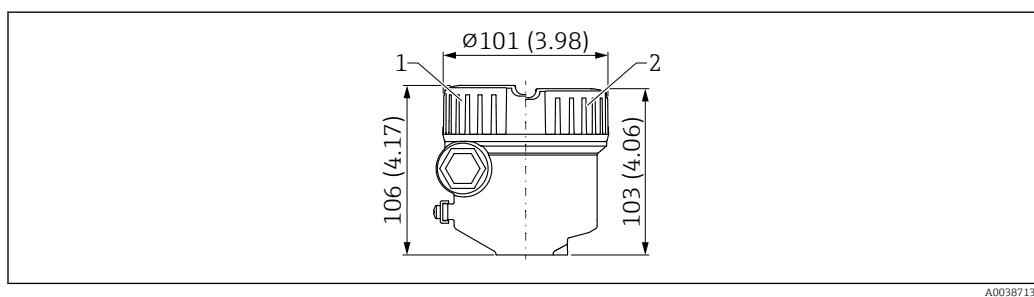
Single compartment housing, aluminium, coated

图 26 Dimensions of single compartment housing, aluminium, coated. Unit of measurement mm (in)

1 Height with cover with plastic sight glass (optional)
 2 Height with cover without sight glass


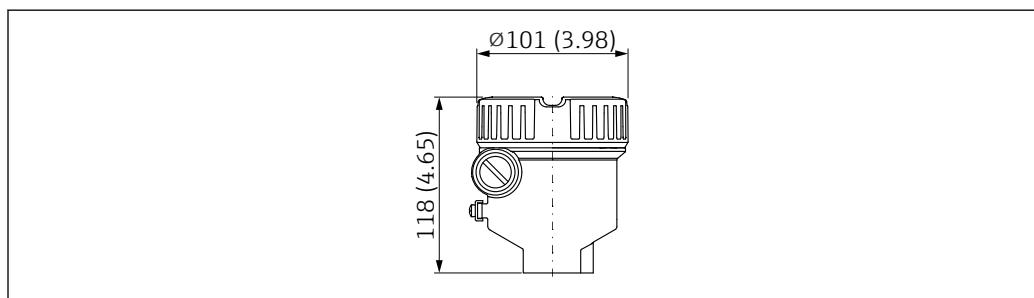
Single compartment housing, aluminum, coated (Ex d/XP)

图 27 Dimensions of single compartment housing, aluminium, coated (Ex d/XP), cover without sight glass. Unit of measurement mm (in)

Single-compartment housing, 316L, hygienic

i For use in hazardous areas with a certain type of protection, the ground terminal on the outside of the housing is required.

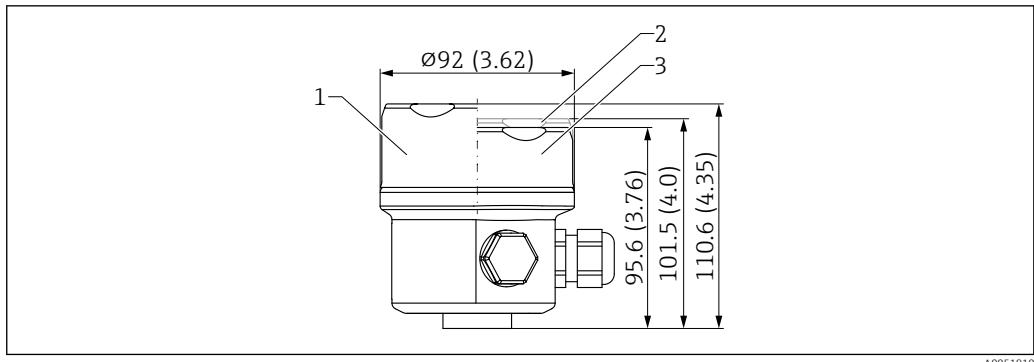

28 Dimensions of single-compartment housing, 316L, hygienic. Unit of measurement mm (in)

- 1 Height with cover including sight glass made of glass (optional)
- 2 Height with cover including sight glass made of plastic (optional)
- 3 Cover without sight glass

Ground terminal

- Ground terminal inside the housing, max. conductor cross-section 2.5 mm² (14 AWG)
- Ground terminal outside on the housing, max. conductor cross-section 4 mm² (12 AWG)

Cable glands

Cable diameter

- Nickel-plated brass: Ø7 to 10.5 mm (0.28 to 0.41 in)
- Plastic: Ø5 to 10 mm (0.2 to 0.38 in)

The scope of delivery comprises:

- 1 cable gland installed
- 1 cable gland sealed with dummy plug

i A second cable gland (not mounted) is also included in the scope of delivery of the relay electronics.


Exceptions: For Ex d/XP, dust ignition-proof, only threaded insertions are permitted.

Probe design

Compact version

Sensor length L: depends on process connection

For further details, see the "Process connections" section.

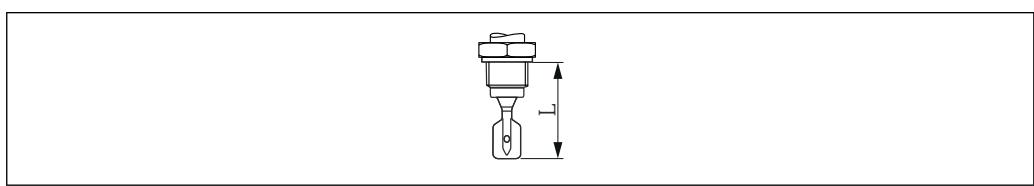

29 Probe design: compact version, sensor length L


Short pipe version

Sensor length L: Depends on process connection

- Flange approx. 115 mm (4.53 in)
- G ¾ thread approx. 115 mm (4.53 in)
- G 1 thread approx. 118 mm (4.65 in)
- NPT thread, R approx. 99 mm (3.9 in)
- Tri-Clamp approx. 115 mm (4.53 in)

Pipe extension

- Sensor lengths L: 117 to 2 000 mm (4.61 to 78.74 in)
- Length tolerances L: < 1 m (3.3 ft) = -5 mm (-0.2 in), 1 to 3 m (3.3 to 9.8 ft) = -10 mm (-0.39 in)

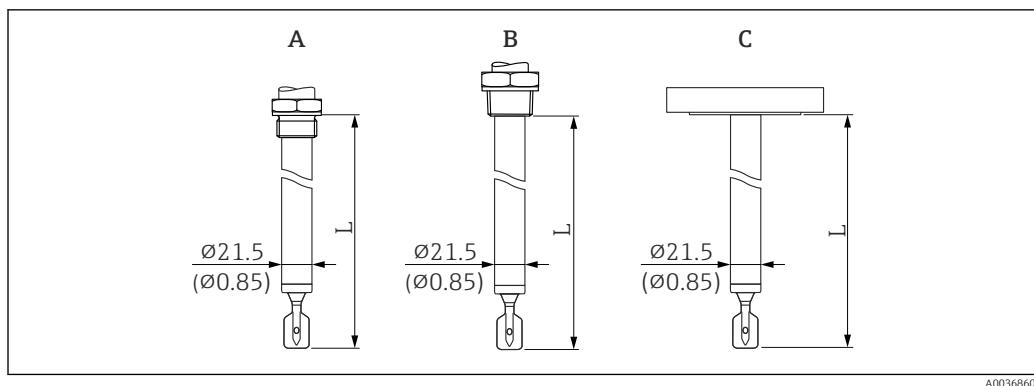


A0036860

30 Probe designs: Pipe extension, short pipe version, sensor length L

- A G 3/4, G 1
- B NPT 3/4, NPT 1, R 3/4, R 1
- C Flange, Tri-Clamp

Tuning fork

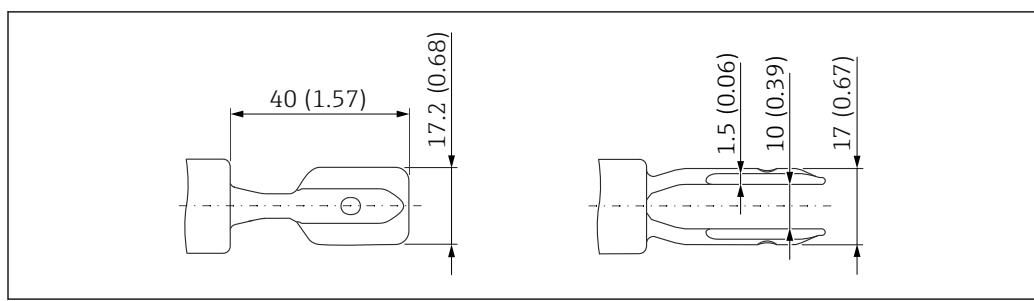


A0038269

31 Tuning fork. Unit of measurement mm (in)

Process connections

Process connection, sealing surface

- Thread ISO228, G
- Thread ASME B1.20.1, NPT
- Thread EN10226, R
- Clamp/Tri-Clamp
- Flange ASME B16.5, RF (Raised Face)
- Flange EN1092-1, Form A
- Flange EN1092-1, Form B1
- Flange JIS B2220, RF (Raised Face)
- Flange HG/T20592, RF (Raised Face)
- Flange HG/T20615, RF (Raised Face)

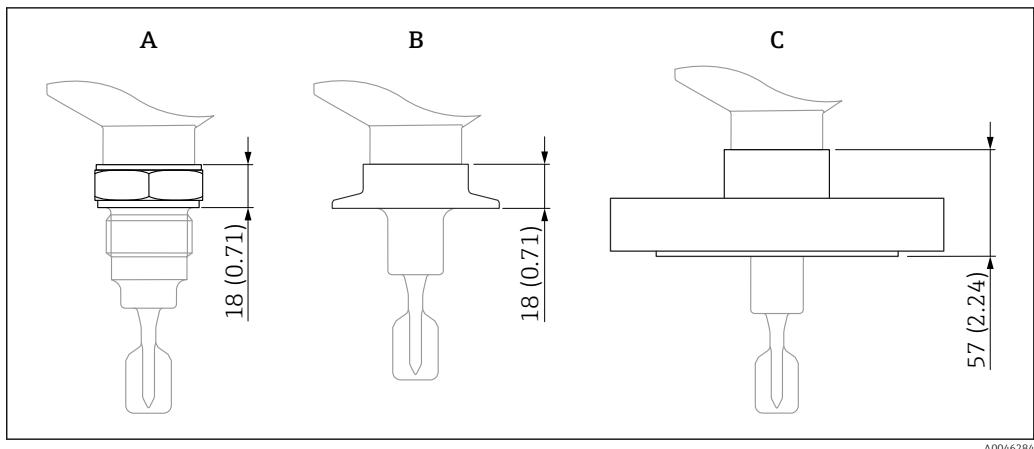Height of process connection

32 Maximum height specification for the process connections. Unit of measurement mm (in)


- A Process connection with threaded connection
- B Process connection with clamp/Tri-Clamp
- C Process connection with flange

Thread ISO228 G for installing in weld-in adapter

G ¾, G 1 suitable for installation in weld-in adapter


- Pressure rating, temperature: ≤ 40 bar (580 psi), ≤ +100 °C (+212 °F)
- Pressure rating, temperature: ≤ 25 bar (363 psi), ≤ +150 °C (+302 °F)
- Weight G ¾: 0.2 kg (0.44 lb)
- Weight G 1: 0.33 kg (0.73 lb)
- Accessory: weld-in adapter

i The weld-in adapter is not included in the scope of delivery. It can optionally be ordered as an accessory.

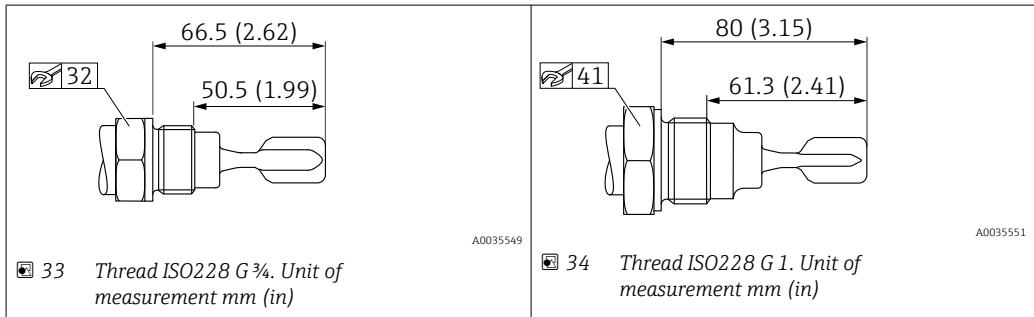*ISO 228 G thread with flat seal*


G ¾, G 1

- Pressure rating: ≤ 25 bar (363 psi)
- Temperature: ≤ 150 °C (302 °F)
- Weight G ¾: 0.2 kg (0.44 lb)
- Weight G 1: 0.33 kg (0.73 lb)

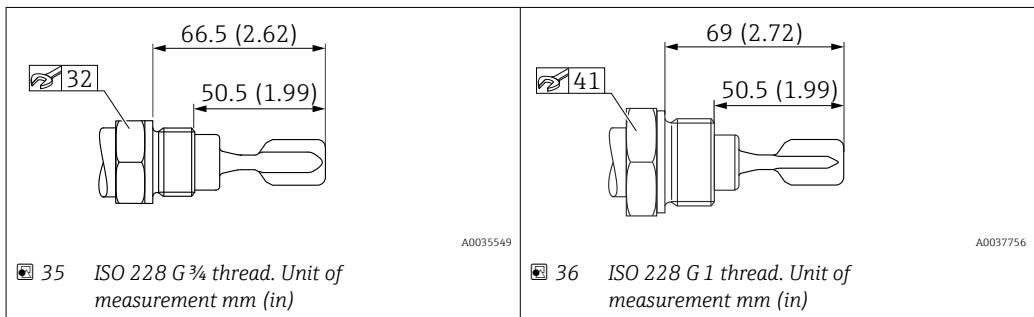


Thread ASME B1.20.1, NPT

- Pressure rating: ≤ 100 bar (1450 psi)
- Temperature: ≤ 150 °C (302 °F)
- Weight: 0.3 kg (0.66 lb)

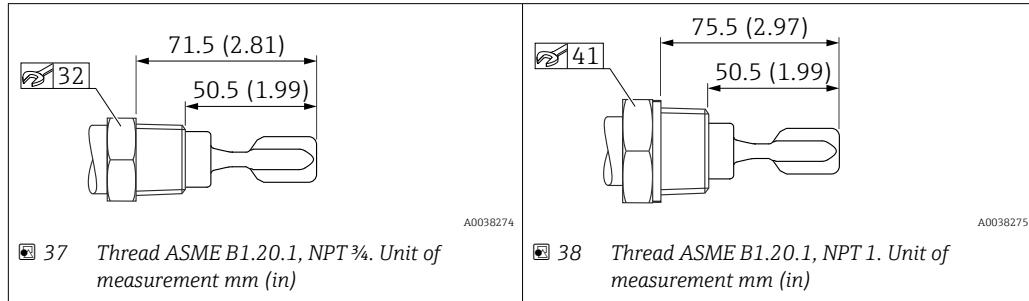

Thread EN10226, R

- Pressure rating: ≤ 100 bar (1450 psi)
- Temperature: ≤ 150 °C (302 °F)
- Weight: 0.3 kg (0.66 lb)

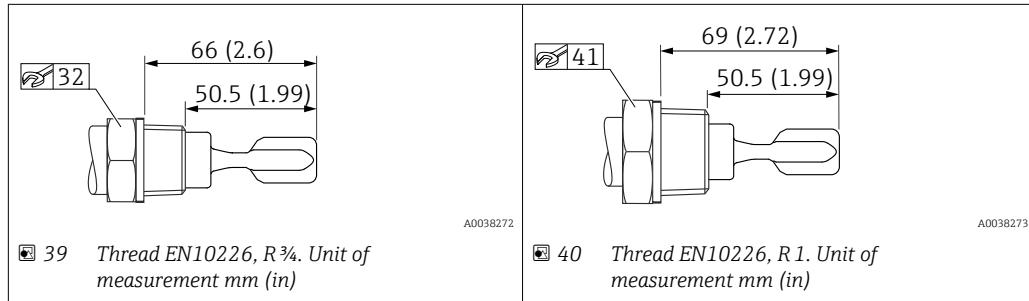

Tri-Clamp


ISO2852 DN25-38 (1 to 1 1/2"), DIN32676 DN25-40


- Pressure rating: ≤ 25 bar (363 psi)
- Temperature: ≤ 150 °C (302 °F)
- Weight: 0.22 kg (0.49 lb)

ISO2852 DN40-51 (2"), DIN32676 DN50

- Pressure rating: ≤ 25 bar (363 psi)
- Temperature: ≤ 150 °C (302 °F)
- Weight: 0.3 kg (0.66 lb)

i The maximum temperature and the maximum pressure are dependent on the clamping ring and the seal used. The lowest value applies in each case.

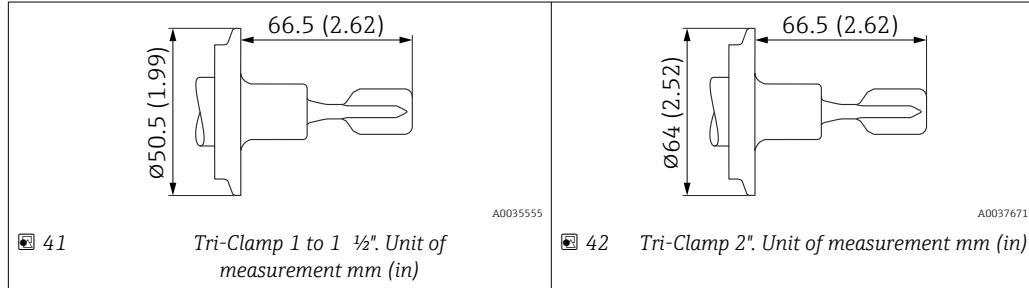

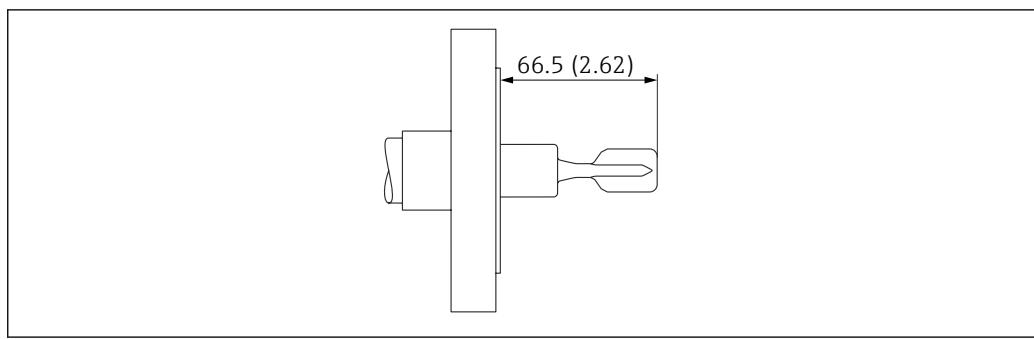Sensor dimensions in the case of flanges

A0035554

43 Example with flange. Unit of measurement mm (in)

ASME B16.5 flanges, RF

Pressure rating	Type	Material	Weight
Cl.150	NPS 1"	316/316L	1.0 kg (2.21 lb)
Cl.150	NPS 1 1/4"	316/316L	1.2 kg (2.65 lb)
Cl.150	NPS 1 1/2"	316/316L	1.5 kg (3.31 lb)
Cl.150	NPS 2"	316/316L	2.4 kg (5.29 lb)
Cl.150	NPS 3"	316/316L	4.9 kg (10.8 lb)
Cl.150	NPS 4"	316/316L	7.0 kg (15.44 lb)
Cl.300	NPS 1"	316/316L	1.5 kg (3.31 lb)
Cl.300	NPS 1 1/4"	316/316L	2.0 kg (4.41 lb)
Cl.300	NPS 1 1/2"	316/316L	2.7 kg (5.95 lb)
Cl.300	NPS 2"	316/316L	3.2 kg (7.06 lb)
Cl.300	NPS 3"	316/316L	6.8 kg (14.99 lb)
Cl.300	NPS 4"	316/316L	11.5 kg (25.6 lb)

EN flanges EN 1092-1, A

Pressure rating	Type	Material	Weight
PN6	DN32	316L (1.4404)	1.2 kg (2.65 lb)
PN6	DN40	316L (1.4404)	1.4 kg (3.09 lb)
PN6	DN50	316L (1.4404)	1.6 kg (3.53 lb)
PN10/16	DN80	316L (1.4404)	4.8 kg (10.58 lb)
PN10/16	DN100	316L (1.4404)	5.6 kg (12.35 lb)
PN25/40	DN25	316L (1.4404)	1.3 kg (2.87 lb)
PN25/40	DN32	316L (1.4404)	2.0 kg (4.41 lb)
PN25/40	DN40	316L (1.4404)	2.4 kg (5.29 lb)
PN25/40	DN50	316L (1.4404)	3.2 kg (7.06 lb)
PN25/40	DN65	316L (1.4404)	4.3 kg (9.48 lb)
PN25/40	DN80	316L (1.4404)	5.9 kg (13.01 lb)
PN25/40	DN100	316L (1.4404)	7.5 kg (16.54 lb)

EN flanges EN 1092-1, B1

Pressure rating	Type	Material	Weight
PN6	DN32	316L (1.4404)	1.2 kg (2.65 lb)
PN6	DN50	316L (1.4404)	1.6 kg (3.53 lb)
PN10/16	DN100	316L (1.4404)	5.6 kg (12.35 lb)
PN25/40	DN25	316L (1.4404)	1.4 kg (3.09 lb)
PN25/40	DN40	316L (1.4404)	2.4 kg (5.29 lb)
PN25/40	DN50	316L (1.4404)	3.2 kg (7.06 lb)
PN25/40	DN80	316L (1.4404)	5.9 kg (13.01 lb)

JIS flanges B2220

Pressure rating	Type	Material	Weight
10K	10K 25A	316L (1.4404)	1.3 kg (2.87 lb)
10K	10K 40A	316L (1.4404)	1.5 kg (3.31 lb)
10K	10K 50A	316L (1.4404)	1.7 kg (3.75 lb)

Weight**Basic weight: 0.65 kg (1.43 lb)**

The basic weight comprises:

- Probe design: compact version
- Electronic insert
- Housing: single compartment, plastic with cover
- Thread, G $\frac{3}{4}$

 Differences in weight are caused by the housing and cover selected.

Housing

- Single compartment, aluminum, coated: 0.8 kg (1.76 lb)
- Single compartment, 316L, hygienic: 0.45 kg (0.99 lb)

Pipe extension

- 1000 mm: 0.9 kg (1.98 lb)
- 50 in: 1.15 kg (2.54 lb)

Process connection

See "Process connections" section

Protective cover, plastic

0.2 kg (0.44 lb)

Materials**Materials in contact with process***Process connection and pipe extension*

316L (1.4404 or 1.4435)

Tuning fork

316L (1.4435)

Flanges

Flanges,  process connections

Seals

Flat seal for process connection G ¾ or G 1: fiber-reinforced elastomer seal, asbestos-free according to DIN 7603



Scope of delivery with flat seal according to DIN7603

- Metric thread G ¾, G 1 standard
- Metric thread G ¾, G 1 for installation in weld-in adapter



Scope of delivery without seal

- Tri-Clamp
- Flanges
- R and NPT thread

Materials not in contact with process

Plastic housing

- Housing: PBT/PC
- Dummy cover: PBT/PC
- Cover seal: EPDM
- Potential equalization: 316L
- Seal under potential equalization: EPDM
- Plug: PBT-GF30-FR
- M20 cable gland: PA
- Seal on plug and cable gland: EPDM
- Threaded adapter as substitute for cable glands: 316L
- Nameplate: plastic foil
- TAG plate: plastic foil, metal or provided by customer

Aluminum housing, coated

- Housing: aluminum EN AC 43400
- Dummy cover: aluminum EN AC 43400
- Cover sealing materials: HNBR
- Plug: aluminum
Plastic (PBT-GF30-FR) in Ex-free, Ex i or IS combination with cable gland, plastic, M20 thread or G ½ thread
- Nameplate: plastic foil
- TAG plate: plastic foil, stainless steel or provided by the customer
- M20 cable glands: select material (stainless steel, nickel-plated brass, polyamide)

Stainless steel housing, 316L, hygienic

- Housing: stainless steel AISI 316L (1.4404)
- Dummy cover: stainless steel AISI 316L (1.4404)
- Cover with polycarbonate sight glass optionally available. For dust ignition-proof applications, the sight glass is made of borosilicate.
- Cover seal materials: VMQ
- Plug: stainless steel or plastic
 - Plastic (PBT-GF30-FR) in Ex-free, Ex i or IS combination with cable gland, plastic, M20 thread or G ½ thread
 - Stainless steel for cable glands made of stainless steel or nickel or for Ex t, Ex ia IIC
- Nameplate: stainless steel housing labeled directly
- TAG plate: plastic foil, stainless steel or provided by the customer
- M20 cable glands: select material (stainless steel, nickel-plated brass, polyamide)

Wired-on nameplate

- Stainless steel
- Plastic film
- Provided by customer
- RFID tag: polyurethane potting compound

Electrical connection

Coupling M20, plastic

- Material: PA
- Seal on cable gland: EPDM
- Dummy plug: plastic

Coupling M20, nickel-plated brass

- Material: nickel-plated brass
- Seal on cable gland: EPDM
- Dummy plug: plastic

M20 thread

The device is supplied with M20 thread as standard.
Transport plug: LD-PE

Thread G 1/2

The device is supplied as standard with an M20 thread and an enclosed adapter to G 1/2 including documentation (aluminum housing, 316L housing, hygienic housing) or with a mounted adapter to G 1/2 (plastic housing).

- Adapter made of PA66-GF or aluminum or 316L (depends on housing version ordered)
- Transport plug: LD-PE

NPT 1/2 thread

The device is supplied as standard with an NPT 1/2 thread (aluminum housing, 316L housing) or with a mounted adapter to NPT 1/2 (plastic housing, hygienic housing).

- Adapter made of PA66-GF or 316L (depends on housing version ordered)
- Transport plug: LD-PE

Thread NPT 3/4

The device is supplied with NPT 3/4 thread as standard.
Transport plug: LD-PE

M12 plug

- Material: nickel-plated CuZn or 316L (depends on housing version ordered)
- Transport cap: LD-PE


Surface roughness

The surface roughness of the surface in contact with the process is Ra ≤ 3.2 µm (126 µin).

Operability

Operation concept

Operation with DIP switches on the electronic insert

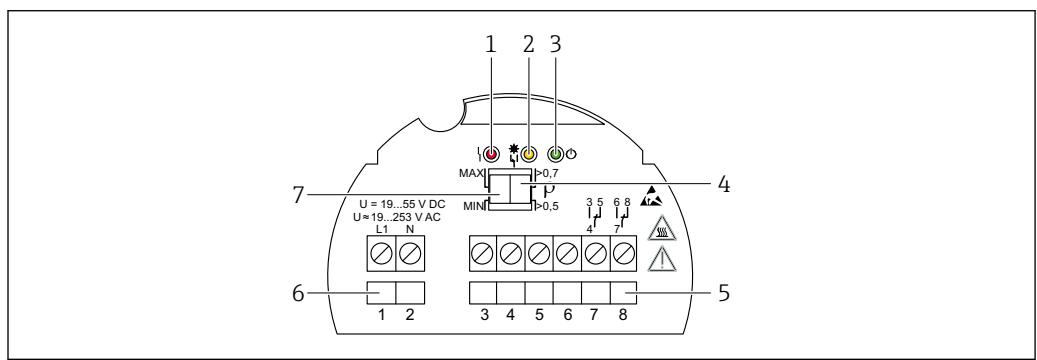
Local operation**Elements on the electronic insert**

44 Example of electronic insert FEL44

- 1 LED red, for warning or alarm
- 2 LED yellow, switch status
- 3 LED green, operational status (LED green lights up = device on)
- 4 DIP switch to set the density to 0.7 or 0.5
- 5 Relay contact terminals
- 6 Power supply terminals
- 7 DIP switch for setting MAX/MIN safety

Operation at electronic insert

MAX/MIN safety mode

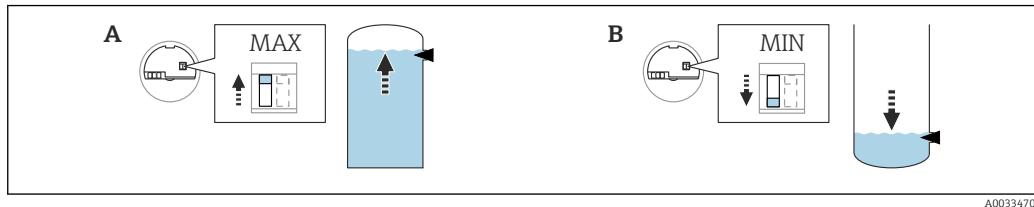

A0033470

45 Switch position on the electronic insert for MAX/MIN safety mode

A MAX (maximum safety mode), as-delivered state
 B MIN (minimum safety mode)

- Minimum/maximum quiescent current safety can be switched at the electronic insert
- MAX = maximum safety: When the vibrating fork is covered, the output switches to demand mode, e.g. use for the overfill protection system
- MIN = minimum safety: When the vibrating fork is uncovered, the output switches to demand mode, e.g. use to prevent pumps from running dry

Density switchover



A0033471

46 Switch position on the electronic insert for density

Liquids with density $> 0.7 \text{ g/cm}^3$ (43.7 lb/ft³)

Switch position $> 0.7 \text{ g/cm}^3$ (43.7 lb/ft³), as-delivered state

Liquids with density $> 0.5 \text{ g/cm}^3$ (31.2 lb/ft³)

Switch position $> 0.5 \text{ g/cm}^3$ (31.2 lb/ft³), can be configured via DIP switch

Liquids with density $> 0.4 \text{ g/cm}^3$ (25.0 lb/ft³)

- Optionally available to order
- Fixed value that cannot be changed
 The function of the DIP switch is interrupted

Certificates and approvals

Current certificates and approvals for the product are available at www.endress.com on the relevant product page:

1. Select the product using the filters and search field.
2. Open the product page.
3. Select **Downloads**.

CE mark

The measuring system meets the legal requirements of the applicable EU Directives. These are listed in the corresponding EU Declaration of Conformity together with the standards applied. Endress +Hauser confirms successful testing of the device by affixing to it the CE mark.

RCM marking

The supplied product or measuring system meets the ACMA (Australian Communications and Media Authority) requirements for network integrity, interoperability, performance characteristics as well as health and safety regulations. Here, especially the regulatory arrangements for electromagnetic compatibility are met. The products bear the RCM marking on the nameplate.



A0029561

Ex approval	All explosion protection data is listed in separate documentation which is available from the download area. The Ex documentation is supplied as standard with all Ex-systems.
--------------------	--

General material compliance	Endress+Hauser guarantees compliance with all relevant laws and regulations, including the current guidelines for materials and substances. Examples: <ul style="list-style-type: none">▪ RoHS▪ China RoHS▪ REACH▪ POP VO (Stockholm Convention) For further information and general declarations of compliance, see the Endress+Hauser website www.endress.com
------------------------------------	--

Overfill protection system	Before mounting the device, observe the documentation from the WHG approvals (German Federal Water Act). Approved for overfill protection systems and leakage detection.
	 Product Configurator: feature "Additional approval"

Marine approvals	 Product Configurator: feature "Additional approval"
-------------------------	---

CRN approval	Device versions with a CRN approval (Canadian Registration Number) are listed in the corresponding registration documents. CRN-approved devices are marked with a registration number. Any restrictions regarding the maximum process pressure values are listed on the CRN certificate.
	 Product Configurator: feature "Additional approval"

Pressure equipment with permitted pressure less than 200 bar, no pressure-bearing volume	Pressure instruments with a process connection that does not have a pressurized housing do not fall within the scope of the Pressure Equipment Directive, irrespective of the maximum working pressure. If pressure equipment does not have a pressure-bearing housing, there is no pressure accessory present within the meaning of the Directive.
	 Druckgeräterichtlinie DGRL (PED) 2014/68/EU, Artikel 2, Absatz 5

Process seal as per ANSI/ISA 12.27.01	North American practice for the installation of process seals. In accordance with ANSI/ISA 12.27.01, Endress+Hauser devices are designed as either single seal or dual seal devices with a warning message. This allows the user to forego the use of - and save the cost of installing - an external secondary process seal in the mating pipe as required in ANSI/NFPA 70 (NEC) and CSA 22.1 (CEC). These instruments comply with the North American installation practice and provide a very safe and cost-saving installation for pressurized applications with hazardous fluids.
	 Please refer to the Safety Instructions (XA) of the relevant device for further information.

EAC conformity	The measuring system meets the legal requirements of the applicable EAC guidelines. These are listed in the corresponding EAC Declaration of Conformity along with the standards applied. The manufacturer confirms successful testing of the device by affixing to it the EAC mark.
-----------------------	---

ASME B 31.3/31.1	Design and materials in accordance with ASME B31.3/31.1. The welds are through-penetration welded and meet the requirements of the ASME Boiler and Pressure Vessel Code, Section IX and EN ISO 15614-1.
-------------------------	---

Ordering information

Detailed ordering information is available from your nearest sales organization www.addresses.endress.com or in the Product Configurator at www.endress.com:

1. Select the product using the filters and search field.
2. Open the product page.
3. Select **Configuration**.



Product Configurator - the tool for individual product configuration

- Up-to-the-minute configuration data
- Depending on the device: direct input of information specific to the measuring point, such as the measuring range or operating language
- Automatic verification of exclusion criteria
- Automatic creation of the order code and its breakdown in PDF or Excel output format
- Ability to order directly in the Endress+Hauser Online Shop

Service	<ul style="list-style-type: none"> ▪ Cleaned of oil+grease (wetted) ▪ PWIS-free (paint-wetting impairment substances) <ul style="list-style-type: none"> The plastic protective cover and weld-in adapters are excluded from the PWIS cleaning ▪ Switching delay setting to be spec. ▪ Setting for MIN safety mode ▪ Default density setting > 0.4 g/cm³ (25.0 lb/ft³) ▪ Default density setting > 0.5 g/cm³ (31.2 lb/ft³)
Test reports, declarations and inspection certificates	<p>All test reports, declarations and inspection certificates are provided electronically in the <i>Device Viewer</i>: Enter the serial number from the nameplate (https://www.endress.com/de/pages/supporting-tools/device-viewer)</p>
Test, certificate, declaration	<p>Documents available to order in the Product Configurator, feature "Test, certificate, declaration":</p> <ul style="list-style-type: none"> ▪ Inspection certificate 3.1, EN10204 (material certificate, wetted parts) ▪ ASME B31.3 process piping, declaration ▪ ASME B31.1 process piping, declaration ▪ Pressure test, internal procedure, test report ▪ Helium leak test, internal procedure, test report ▪ PMI test, internal procedure (wetted parts), test report <p> Documentation currently available on the Endress+Hauser website: www.endress.com → Downloads or with the serial number of the device under Online Tools in the Device Viewer.</p>
TAG	<p>Measuring point (TAG)</p> <p>The device can be ordered with a tag name.</p> <p>Location of tag name</p> <p>Select in the additional specification:</p> <ul style="list-style-type: none"> ▪ Stainless steel tag plate ▪ Paper adhesive label ▪ Tag provided by the customer ▪ RFID tag ▪ RFID tag + stainless steel tag plate ▪ RFID tag + paper adhesive label ▪ RFID tag + tag provided by the customer ▪ IEC 61406 stainless steel tag ▪ IEC 61406 stainless steel tag + NFC tag ▪ IEC 61406 stainless steel tag, stainless steel tag ▪ IEC 61406 stainless steel tag + NFC, stainless steel tag ▪ IEC 61406 stainless steel tag, plate supplied ▪ IEC 61406 stainless steel tag + NFC, plate supplied

Definition of tag name

Specify in the additional specification:
3 lines of maximum 18 characters each
The specified tag name appears on the selected plate and/or on the RFID tag.

Accessories

The accessories currently available for the product can be selected at www.endress.com:


1. Select the product using the filters and search field.
2. Open the product page.
3. Select **Spare parts & Accessories**.

Weather protection cover, plastic, XW111

The weather protection cover can be ordered together with the device via the "Accessory enclosed" product structure.

It is used to protect against direct sunlight, precipitation and ice.

The plastic weather protection cover is suitable for the single compartment housing made of aluminum. The delivery includes the holder for direct mounting on the housing.

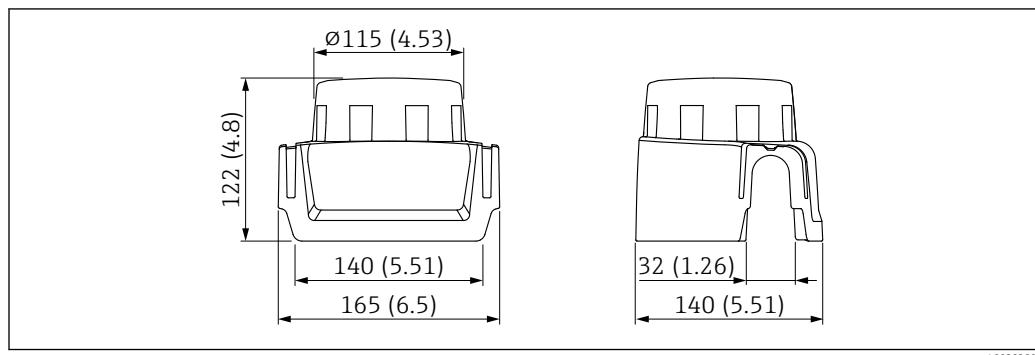

47 Dimensions of weather protection cover, plastic, XW111. Unit of measurement mm (in)

Material

Plastic

Accessory order code:

71438291

 Special Documentation SD02423F

M12 socket

 The M12 sockets listed are suitable for use in the temperature range -25 to +70 °C (-13 to +158 °F).

M12 socket IP69

- Terminated at one end
- Angled
- 5 m (16 ft) PVC cable (orange)
- Slotted nut 316L (1.4435)
- Body: PVC
- Order number: 52024216


M12 socket IP67

- Angled
- 5 m (16 ft) PVC cable (gray)
- Slotted nut Cu Sn/Ni
- Body: PUR
- Order number: 52010285

Sliding sleeves for unpressurized operation

 Not suitable for use in explosive atmospheres.

Switch point, infinitely adjustable.

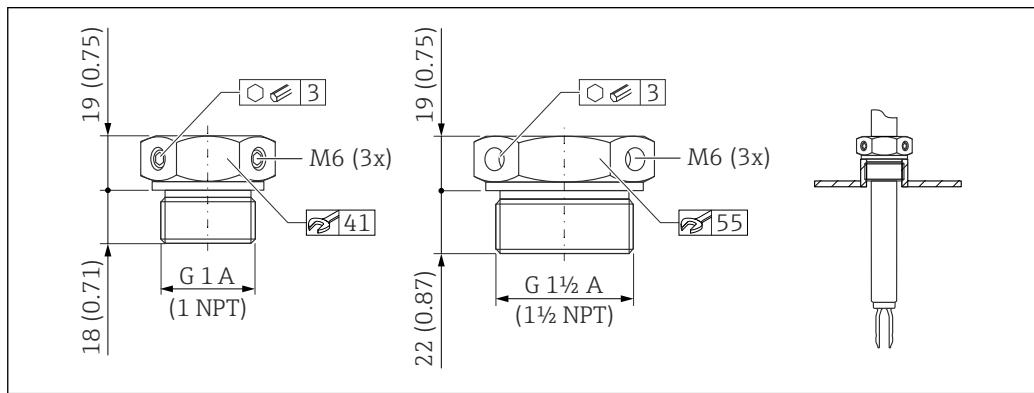

A0037666

48 Sliding sleeves for unpressurized operation $p_e = 0$ bar (0 psi). Unit of measurement mm (in)

G 1, DIN ISO 228/I

- Material: 1.4435 (AISI 316L)
- Weight: 0.21 kg (0.46 lb)
- Order number: 52003978
- Order number: 52011888, approval: with inspection certificate EN 10204 - 3.1 material

NPT 1, ASME B 1.20.1

- Material: 1.4435 (AISI 316L)
- Weight: 0.21 kg (0.46 lb)
- Order number: 52003979
- Order number: 52011889, approval: with inspection certificate EN 10204 - 3.1 material

G 1 1/2, DIN ISO 228/I

- Material: 1.4435 (AISI 316L)
- Weight: 0.54 kg (1.19 lb)
- Order number: 52003980
- Order number: 52011890, approval: with inspection certificate EN 10204 - 3.1 material

NPT 1 1/2, ASME B 1.20.1

- Material: 1.4435 (AISI 316L)
- Weight: 0.54 kg (1.19 lb)
- Order number: 52003981
- Order number: 52011891, approval: with inspection certificate EN 10204 - 3.1 material


More detailed information and documentation are available:

- Product Configurator on the Endress+Hauser website www.endress.com
- Endress+Hauser Sales Organization www.addresses.endress.com

High pressure sliding sleeves

 Suitable for use in explosive atmospheres.

- Switch point, infinitely adjustable
- Seal package made of graphite
- Graphite seal available as spare part 71078875
- For G 1, G 1 1/2: seal is included in the delivery

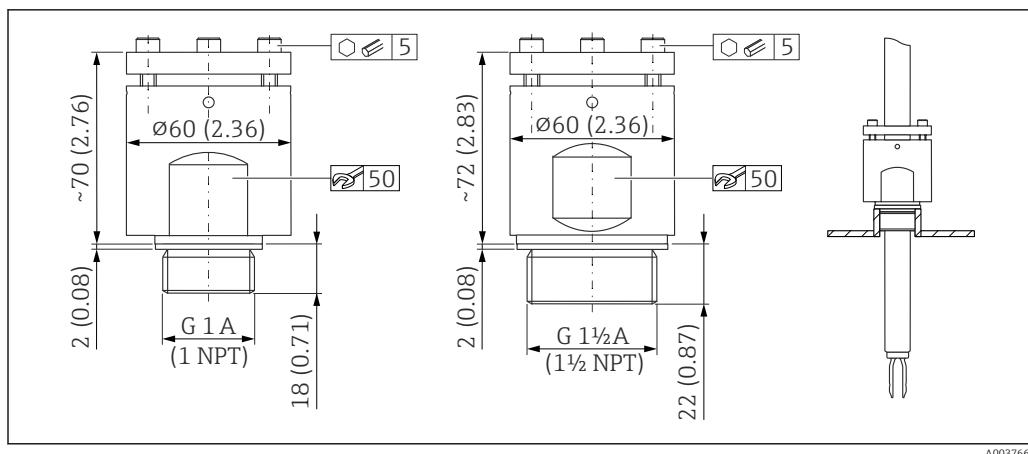

49 High pressure sliding sleeves. Unit of measurement mm (in)

G 1, DIN ISO 228/1

- Material: 1.4435 (AISI 316L)
- Weight: 1.13 kg (2.49 lb)
- Order number: 52003663
- Order number: 52011880, approval: with inspection certificate EN 10204 - 3.1 material

G 1, DIN ISO 228/1

- Material: AlloyC22
- Weight: 1.13 kg (2.49 lb)
- Approval: with inspection certificate EN 10204 - 3.1 material
- Order number: 71118691

NPT 1, ASME B 1.20.1

- Material: 1.4435 (AISI 316L)
- Weight: 1.13 kg (2.49 lb)
- Order number: 52003667
- Order number: 52011881, approval: with inspection certificate EN 10204 - 3.1 material

NPT 1, ASME B 1.20.1

- Material: AlloyC22
- Weight: 1.13 kg (2.49 lb)
- Approval: with inspection certificate EN 10204 - 3.1 material
- Order number: 71118694

G 1 1/2, DIN ISO 228/1

- Material: 1.4435 (AISI 316L)
- Weight: 1.32 kg (2.91 lb)
- Order number: 52003665
- Order number: 52011882, approval: with inspection certificate EN 10204 - 3.1 material

G 1 1/2, DIN ISO 228/1

- Material: AlloyC22
- Weight: 1.32 kg (2.91 lb)
- Approval: with inspection certificate EN 10204 - 3.1 material
- Order number: 71118693

NPT 1 1/2, ASME B 1.20.1

- Material: 1.4435 (AISI 316L)
- Weight: 1.32 kg (2.91 lb)
- Order number: 52003669
- Order number: 52011883, approval: with inspection certificate EN 10204 - 3.1 material

NPT 1 1/2, ASME B 1.20.1


- Material: AlloyC22
- Weight: 1.32 kg (2.91 lb)
- Approval: with inspection certificate EN 10204 - 3.1 material
- Order number: 71118695

More detailed information and documentation are available:

- Product Configurator on the Endress+Hauser website www.endress.com
- Endress+Hauser sales organization www.addresses.endress.com

Weld-in adapter

Various weld-in adapters are available for installation in vessels or pipes. The adapters are optionally available with inspection certificate 3.1 EN 10204.

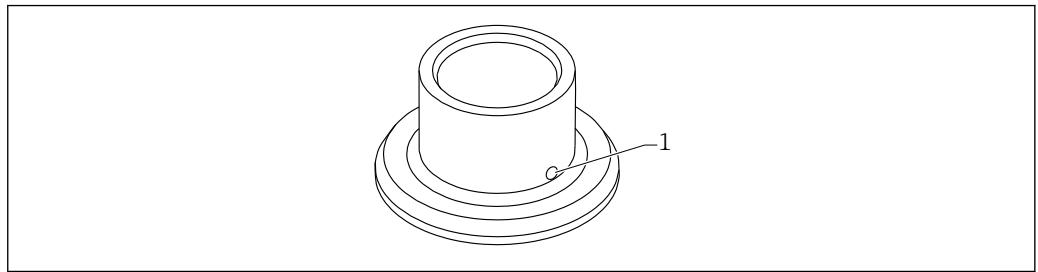

50 Weld-in adapter (sample view)

1 Leakage hole

Weld in the weld-in adapter in such a way that the leakage hole is pointing downwards. This enables any leaks to be detected quickly.

- G 1, Ø53 mounting on the pipe
- G 1, Ø60 flush mount on the vessel
- G ¾, Ø55 flush mount
- G 1 sensor adjustable

 For detailed information, see "Technical Information" TI00426F (Weld-in adapters, process adapters and flanges)

Available in the Downloads area of the Endress+Hauser website (www.endress.com/downloads).

Documentation

 For an overview of the scope of the associated Technical Documentation, refer to the following:

- *Device Viewer* (www.endress.com/deviceviewer): Enter the serial number from the nameplate
- *Endress+Hauser Operations app*: Enter serial number from nameplate or scan matrix code on nameplate.

Standard documentation**Document type: Operating Instructions (BA)**

The Operating Instructions contain all the information that is required in various phases of the life cycle of the device: from product identification, incoming acceptance and storage, to mounting, connection, operation and commissioning through to troubleshooting, maintenance and disposal. BA01893F

Document type: Brief Operating Instructions (KA)

Quick guide to obtaining the first measured value – the Brief Operating Instructions contain all the essential information from incoming acceptance to initial commissioning. KA01411F

Document type: Safety Instructions, certificates

Depending on the approval, safety instructions for electrical equipment in hazardous areas are also supplied with the device. They are an integral part of the Operating Instructions.

Information on the Safety Instructions (XA) that are relevant for the device is provided on the nameplate.

Supplementary device-dependent documentation

Additional documents are supplied depending on the device version ordered: Always comply strictly with the instructions in the supplementary documentation. The supplementary documentation is an integral part of the device documentation.

Special Documentation

- SD02398F: Sliding sleeve for Liquiphant (installation instructions)
- SD01622P: Weld-in adapter (installation instructions)
- TI00426F: Adapter and flanges (overview)



71726565

www.addresses.endress.com
