

# Industrial Smart Pressure Transmitter

## Model: MDPT

### Applications

- For level, Best fit for vacuum applications and applications with corrosive and abrasive media Process safety through membrane breakage detection
- Process industry: Chemical/petro chemical, power stations, food and beverage, offshore oil rigs, marine application, pulp and paper, environmental technology, machine building and general plant construction



### Special features

- Accuracy 0.075 and [0.04,0.02](#)
- Best accuracy, reproducibility and long-term stability
- Local zero and span adjustments
- Automatic temperature compensation
- Intrinsically safe and explosion proof
- Easy menu-guided commissioning via local display, 4 to 20mA
- with HART, PROFIBUS PA, FOUNDATION Fieldbus
- Cost savings with modular concept for easy replacement of sensor, display or electronics
- Measuring ranges: -14.7 to 20000 psi

### Description

■ <b>Accuracy class</b>	0.075 standard and <a href="#">0.04,0.02</a> (option)
■ <b>Accuracy stability</b>	Accuracy will be held for the nominal range for a minimum of 3 years
■ <b>Over pressure limit</b>	250 bar standard, <a href="#">350bar, 420bar</a> (option)
■ <b>Transfer function</b>	Linear, squar or squar root
■ <b>Response time</b>	0.1 second
■ <b>Diaphragm material</b>	Stainless steel 316
■ <b>Process connection</b>	<a href="#">Hastelloy, Monel, Tantalum</a> (option)
■ <b>Vent material</b>	Stainless steel 316
■ <b>Operating temperature</b>	<a href="#">Hastelloy, Monel, Tantalum</a> (option)
■ <b>Storage temperature</b>	Stainless steel 316
■ <b>Temperature coefficient</b>	-20 ... +120°C
	-40 ... +120°C
	within range -20 to +85 °C



■ <b>zero &amp; span</b>	(compensated temperature range) zero: $\leq 0.005\%$ per $^{\circ}\text{C}$ typical, $\leq 0.01\%$ per $^{\circ}\text{C}$ max. span: $\leq 0.005\%$ per $^{\circ}\text{C}$ typical, $\leq 0.01\%$ per $^{\circ}\text{C}$ max.
■ <b>Damping</b>	0...60 sec adjustable
■ <b>Long stability</b>	$\pm 0.1\%$ F.S/year
■ <b>Pressure type</b>	Gauge, absolute ,sealed gauge
■ <b>Protection</b>	IP67
■ <b>Power supply</b>	10 - 36VDC
■ <b>Output signal</b>	4 ... 20mA, 0.5 ... 4.5VDC, 1 ... 5VDC, 1 ... 10VDC
■ <b>Intrinsically safe</b>	II 1/2 Ex ia IIC T4/T5
■ <b>Explosion-proof</b>	II 1/2 Exia/d IIC T5/T6
■ <b>Pressure port</b>	1/2NPTF, 1/4NPTF or customize
■ <b>Housing material</b>	Aluminum, Stainless steel
■ <b>Fill liquid</b>	Silicon or inert fill
■ <b>Message</b>	Self diagnosis message
■ <b>Conduit entry size</b>	1/2NPTF or M20*1.5
■ <b>shock</b>	50g /11ms
■ <b>Range</b>	-14.7 to 20000 psi

These transmitters can be configured utilizing any of the three following methods: **(1)** locally configuring the instrument (zero, range, shift, characteristics and damping ratio) by means of pushbuttons on the transmitter, **(2)** by a PC with a dedicated interface and the MADECO smart configuration software (MDPTS); **(3)** with having the capability of digital communication, they may be configured using MADECO hand-held terminal with HART protocol or other hand-held communicators\*. The data interchange with the transmitter enables the user to identify the transmitter, calibrate the sensor, read the immediate measured value of the input and the current output of the transmitter. User may alter the measurement unit and the range, introduce zero elevation, apply measurement inversion, take a square root or square the value of the measurement and set the damping time. Additionally the operator may force an output current with a set value.

MDPT pressure transmitter measures in both corrosive and non-corrosive gases, vapors and liquids.

The pressure transmitter makes use of the piezo-resistive effect to make the measurement. The output signal is a DC current which is linearly proportional to the input pressure.

In the version "with Ex protection Ex II 1/2 G Ex ia IIC T6 Ga/Gb, the transmitter can be mounted within the hazardous area Zone 1, for connection to Zone 0.


A wide spectrum of pressure separators is available for special applications such as level measurements, or for corrosive media.

**MDPT Industrial Pressure Transmitter**

ORDERING CODE	Example: <b>MDPT</b>	G	2	4	A	2	M	S	I	AT	H
<b>Measurement Type</b>											
A - Absolute											
G - Gauge				G							
<b>Process Connection</b>											
2 - 1/2 NPTM			2								
4 - 1/2 NPTF											
6 - 1/4 NPTF											
8 - 1/2 BSPM											
C - Customer											
<b>Pressure Range</b>											
2 - (-1...2 bar)											
4 - (-1...10 bar)				4							
6 - (-1...50 bar)											
8 - (-1...250 bar)											
10 - (-1...600 bar)											
12 - (-1...1380 bar)											
C - Customer											
<b>Housing material</b>							A				
A - Aluminum											
S - Stainless Steel											
C - Customer											
<b>Conduit Entry Size</b>						2					
2 - 1/2NPT											
4 - M20*1.5											
C - Customer											
<b>Isolating Diaphragm</b>											
S - 316L Stainless steel											
M - Monel® 400							M				
H - Hastelloy											
T - Tantalum											
G - Gold plated											
C - Customer											
<b>Process Connection</b>								S			
S - 316L Stainless steel											
M - Monel® 400											
H - Hastelloy											
T - Tantalum											
G - Gold plated											
C - Customer											
<b>Sensor Fill Fluid</b>											
S - Silicone fill & FPM viton gasket											
I - Inert Oxygen services- Fluorolube & NBR v								I			
C - Customer											
<b>Accuracy</b>											
AT - 0.75% (std.)									AT		
AC - 0.04%											
AS - 0.02%											

## MDPT Industrial Pressure Transmitter

ORDERING CODE	Example: <b>MDPT</b>	H	N	2	N	WC	Note
<b>Transmitter Output</b>							
H - 4...20mA signal based on HART® protocol		H					
F - Foundation™ fieldbus protocol							
P - PROFIBUS®PA Protocol							
L - Low power 1...5 VDC							
W - Wireless							
C - Customer							
<b>Certificate</b>							
N - None			N				
I - Intrinsically safe (II 1/2 Ex ia IIC T4/T5)							
E - Explosion proof (II 1/2 Exia/d IIC T5/T6)							
M - Marine certificate-DNV							
<b>Remote Seals</b>				2			
2 - Not required							
4 - Assemble to MADECO MDD1 capillary and Diaphragm seals							
C - Customer							
<b>Display</b>							
N - None			N				
D - LCD display							
<b>Options</b>							
OS - Overload stop							
AM - Assemble 2way manifold							
BR - Bracket for 2-in.pipe or panel mounting. sst							
CO - MADECO cooling element							
CC - Calibration certificate							
CM - Material Traceability certification							
CP - Hydrostatic testing with certificate							
CL - Cleaning for special service							
CR - special calibrated range (please specify the range)							
AN - Analog zero and span trim							
NH - Stainless steel tag wired to case							
AT - ATEX							
W3 - 3 year warranty					W3		
W5 - 5 year warranty							
Other							

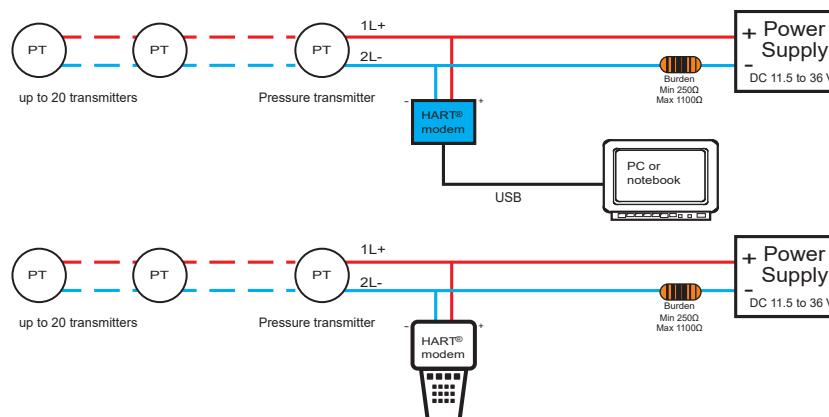



Address: 7191 Yonge street, Toronto, Canada

Tel: +16472221281(5 line)

Web: [www.madecotech.com](http://www.madecotech.com)

Email: [Info@madecotech.com](mailto:Info@madecotech.com)