

Differential pressure gauge

For the process industry, high overload safety up to 650 bar

Models 732.14, 733.14, 762.14 and 763.14

WIKA data sheet PM 07.13



For further approvals,
see page 8

Applications

- For gaseous and liquid aggressive media that are not highly viscous or crystallising, also in aggressive environments
- Pump monitoring and control
- Filter monitoring
- Level measurement on closed vessels

Special features

- Differential pressure measuring ranges from -1 ... +30 bar [-14.5 ... 435 psi] to 0 ... 40 bar [0 ... 580 psi]
- High working pressure (static pressure) and high overload safety, selectable 40 bar [580 psi], 100 bar [1,450 psi], 250 bar [3,625 psi], 400 bar [5,800 psi] and 650 bar [9,425 psi]
- The transmission fluid in the measuring chamber dampens the indicator in case of high changes of the rate of pressure
- Model 76x.14: Monel version
- QR code on dial links to instrument-specific information



Differential pressure gauge model 732.14

Configurator



Standard articles



Description

These differential pressure gauges are made of highly corrosion-resistant stainless steel. A high overload safety is achieved by the all-metal construction and the close-fitting design of the diaphragm measuring element.


The use of high-quality stainless steel materials and the robust design are geared to applications in the chemical and process engineering industries. Thus the instrument is suitable for liquid and gaseous media, also in aggressive environments.

The wetted parts for these instruments are also available in special materials such as Monel or Hastelloy.

Scale ranges of 0 ... 60 mbar to 0 ... 40 bar [0 ... 0.87 to 0 ... 580 psi] ensure the measuring ranges required for a wide variety of applications.

The QR code on the dial allows instrument-specific information such as the serial number, the order number, certificates and other product data to be retrieved from the internet easily and in the long term.

Functionality

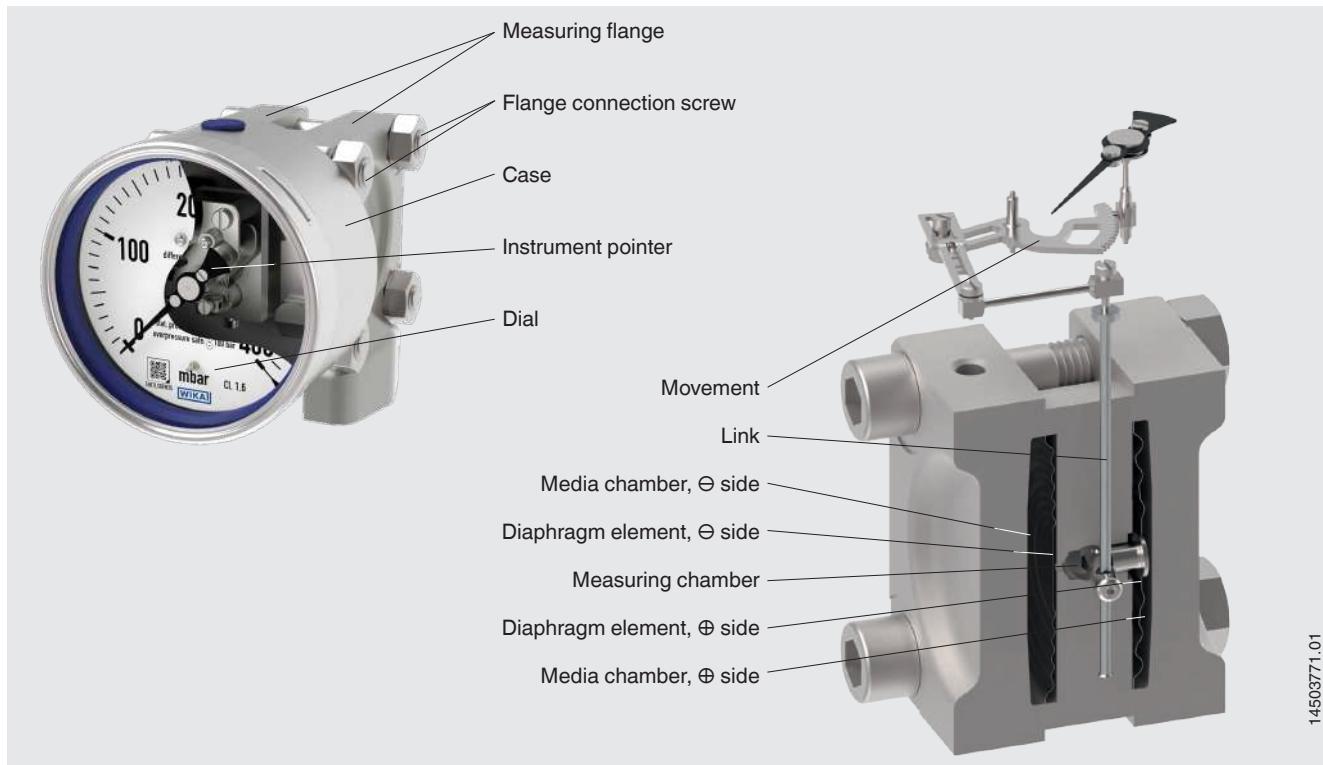

Design and operating principle

- Pressures p_1 and p_2 act on the \oplus and \ominus sides of the measuring chamber.
- The media chambers are separated from the transmission fluid-filled measuring chamber by one diaphragm element each.
- The pressure difference between \oplus and \ominus sides deflects the diaphragm of the \oplus side and displaces the transmission fluid.
- The deflection is transmitted to the movement via the link.
- The movement converts the deflection into a pointer rotation.

Overload safety

Through load take-up points with metallic seating for the diaphragm elements, the instrument can withstand extremely high working pressures with pressure ratings of PN 40 ... PN 650 (40 ... 650 bar [580 ... 9,425 psi]).

Overview of versions

Model	Material of wetted parts	With case filling
	<ul style="list-style-type: none">• Stainless steel 316L• Stainless steel 316L + NiCr alloy (Inconel)• Hastelloy C276	<ul style="list-style-type: none">• Monel 2.4360• Monel 2.4360 + Hastelloy C276
732.14	x	
733.14	x	x
762.14		x
763.14	x	x

The above-mentioned versions can, optionally, be ordered with Ex approval.

→ For approvals and certificates, see page 8

Specifications

Basic information	
Standard	
EN 837-3	Diaphragm and capsule pressure gauges
DIN 16003	Pressure measuring instruments for differential pressure
→ For information on the "Selection, installation, handling and operation of pressure gauges", see Technical information IN 00.05.	
Nominal size (NS)	<input checked="" type="checkbox"/> Ø 100 mm [4"] <input checked="" type="checkbox"/> Ø 160 mm [6"]
Window	<input checked="" type="checkbox"/> Laminated safety glass <input checked="" type="checkbox"/> Polycarbonate
Connection location	Lower mount (radial) Other connection locations on request
Case	
Design	Safety level "S1" per EN 837-1: with blow-out device
Material	Stainless steel 1.4404 (316L) Stainless steel 1.4571 (316Ti)
Case filling	<input checked="" type="checkbox"/> Without <input checked="" type="checkbox"/> Glycerine-water mixture <input checked="" type="checkbox"/> Silicone oil Instruments with case filling with compensating valve to vent case.
Venting of the media chambers	
Span ≤ 0.25 bar [3.63 psi]	With venting
Span > 0.25 bar [3.63 psi]	<input checked="" type="checkbox"/> Without <input checked="" type="checkbox"/> With venting
Movement	Stainless steel

1) Ingress protection IP65 for instruments with case filling

Measuring element	
Type of measuring element	2 diaphragm elements with transmission fluid
Material	
Diaphragm element, model 732.14 and 733.14	Span ≤ 0.25 bar [3.63 psi] <input checked="" type="checkbox"/> Stainless steel 316L <input checked="" type="checkbox"/> Hastelloy C276 Span > 0.25 bar [3.63 psi] <input checked="" type="checkbox"/> Stainless steel 316L / NiCr alloy (Inconel) <input checked="" type="checkbox"/> Hastelloy C276
Diaphragm element, model 762.14 and 763.14	<input checked="" type="checkbox"/> Monel 2.4360 <input checked="" type="checkbox"/> Hastelloy C276 ¹⁾

1) Requirement for design per NACE MR0175 / ISO 15156

Accuracy specifications	
Accuracy class	<input checked="" type="checkbox"/> 1.6 <input checked="" type="checkbox"/> 2.5 <input checked="" type="checkbox"/> 1.0 (application test required)
Zero point setting	
Instruments with case filling	<input checked="" type="checkbox"/> Without <input checked="" type="checkbox"/> External setting
Instruments without case filling	<input checked="" type="checkbox"/> Without <input checked="" type="checkbox"/> Setting by means of adjustable pointer
Influence of static pressure	Depending on scale range and pressure rating → See separate table

Accuracy specifications

Temperature error	On deviation from the reference conditions at the measuring system: ≤ ±0.5 % per 10 °C [≤ ±0.5 % per 18 °F] of full scale value
Reference conditions	
Ambient temperature	+20 °C [+68 °F]

Static pressure influence

Span ¹⁾	Measuring deviation based on the static pressure in % per 10 bar ^{2) 3)}				
	PN 40	PN 100	PN 250	PN 400	PN 650
0.06 ... 0.16 bar [0.9 ... 2.3 psi]	≤ ±0.125	≤ ±0.1	≤ ±0.12	-	-
0.25 bar [3.6 psi]	≤ ±0.125	≤ ±0.15	-	-	-
0.4 bar [5.8 psi]	≤ ±0.125	≤ ±0.1	≤ ±0.1	-	-
0.6 ... 40 bar [8.7 ... 580 psi]	≤ ±0.125	≤ ±0.1	≤ ±0.06	≤ ±0.063	≤ ±0.038

1) Values for customer-specific spans are defined after an application-specific test

2) Other measuring deviations for special material Monel or Hastelloy possible

3) Definition static pressure influence per DIN 16003

Scale ranges

mbar	
0 ... 60	0 ... 1,000
0 ... 100	0 ... 1,100
0 ... 160	0 ... 1,200
0 ... 250	0 ... 1,600
0 ... 400	0 ... 2,500
0 ... 600	-

psi	
0 ... 10	0 ... 200
0 ... 15	0 ... 250
0 ... 30	0 ... 300
0 ... 60	0 ... 400
0 ... 100	0 ... 500
0 ... 150	0 ... 600
0 ... 160	-

bar	
0 ... 0.25	0 ... 7
0 ... 0.4	0 ... 10
0 ... 0.6	0 ... 14
0 ... 1	0 ... 16
0 ... 1.6	0 ... 20
0 ... 2.5	0 ... 25
0 ... 4	0 ... 30
0 ... 6	0 ... 40

kPa	
0 ... 6	0 ... 300
0 ... 10	0 ... 400
0 ... 16	0 ... 600
0 ... 25	0 ... 700
0 ... 40	0 ... 800
0 ... 60	0 ... 1,000
0 ... 70	0 ... 1,400
0 ... 100	0 ... 1,600
0 ... 160	0 ... 2,500
0 ... 200	0 ... 3,000
0 ... 250	0 ... 4,000

Vacuum and compound scale ranges

mbar		psi	
-60 ... 0	-10 ... +50	-15 ... 0 inHg	-30 inHg ... +100
-100 ... 0	-20 ... +80	-30 inHg	-30 inHg ... +160
-160 ... 0	-40 ... +120	-30 inHg ... +15	-30 inHg ... +200
-250 ... 0	-50 ... +50	-30 inHg ... +30	-30 inHg ... +300
-400 ... 0	-50 ... +200	-30 inHg ... +60	
-600 ... 0	-80 ... +80		
-1,000 ... 0	-100 ... +150		
-1,100 ... 0	-200 ... +600		
-1,200 ... 0	-500 ... +500		
bar		kPa	
-0.6 ... 0	-1 ... +5	-60 ... 0	-100 ... +200
-1 ... 0	-1 ... +7	-100 ... 0	-100 ... +300
-1 ... +1	-1 ... +9	-2 ... +4	-100 ... +400
-1 ... +1.5	-1 ... +10	-4 ... +6	-100 ... +500
-1 ... +2	-1 ... +15	-6 ... +10	-100 ... +700
-1 ... +3	-1 ... +24	-10 ... +15	-100 ... +900
-1 ... +4	-1 ... +30	-15 ... +15	-100 ... +1,000
		-100 ... +100	-100 ... +1,500
		-100 ... +150	-100 ... +2,400

Other scale ranges on request

Further details on: scale ranges

Unit	<input checked="" type="checkbox"/> mbar <input checked="" type="checkbox"/> bar <input checked="" type="checkbox"/> psi <input checked="" type="checkbox"/> kPa <input checked="" type="checkbox"/> MPa	<input checked="" type="checkbox"/> mmH ₂ O <input checked="" type="checkbox"/> inH ₂ O <input checked="" type="checkbox"/> kg/cm ² <input checked="" type="checkbox"/> oz/cm ²				
	Other units on request					
Overload safety and max. working pressure (static pressure)						
<table border="1"> <tr> <td>Pressure ratings PN 40 ... PN 400</td><td>Max. 40, 100, 250 or 400 bar [580, 1,450, 3,625 or 5,800 psi] On one, both and alternately on the \oplus and \ominus sides</td></tr> <tr> <td>Pressure rating PN 650</td><td>Max. 400 bar [5,800 psi] on one side and alternately on the \oplus und \ominus sides Max. 650 bar [9,425 psi] on both sides on the \oplus and \ominus sides</td></tr> </table>			Pressure ratings PN 40 ... PN 400	Max. 40, 100, 250 or 400 bar [580, 1,450, 3,625 or 5,800 psi] On one, both and alternately on the \oplus and \ominus sides	Pressure rating PN 650	Max. 400 bar [5,800 psi] on one side and alternately on the \oplus und \ominus sides Max. 650 bar [9,425 psi] on both sides on the \oplus and \ominus sides
Pressure ratings PN 40 ... PN 400	Max. 40, 100, 250 or 400 bar [580, 1,450, 3,625 or 5,800 psi] On one, both and alternately on the \oplus and \ominus sides					
Pressure rating PN 650	Max. 400 bar [5,800 psi] on one side and alternately on the \oplus und \ominus sides Max. 650 bar [9,425 psi] on both sides on the \oplus and \ominus sides					
Dial						
Scale layout	<input checked="" type="checkbox"/> Single scale <input checked="" type="checkbox"/> Dual scale					
Scale colour	Single scale	Black				
	Dual scale	Black/red				
Material	Aluminium					
Customer-specific version	<input checked="" type="checkbox"/> Without <input checked="" type="checkbox"/> With special scale, e.g. linear pressure or square root incrementation Other scales, e.g. with red mark, circular arcs or circular sectors, on request → Alternatively, adhesive label set for red and green circular arcs; see data sheet AC 08.03					
Pointer						
Instrument pointer	With case filling	Standard pointer, aluminium, black				
	Without case filling	Adjustable pointer, aluminium, black				
Mark pointer/drag pointer	<input checked="" type="checkbox"/> Without <input checked="" type="checkbox"/> Mark pointer on bayonet ring, adjustable					
Pointer stop pin	<input checked="" type="checkbox"/> Without <input checked="" type="checkbox"/> At 6 o'clock					

Process connection	
Standard	<ul style="list-style-type: none"> ■ EN 837-1 ■ ANSI/B1.20.1 ■ EN 61518
→ For valve manifolds for an instrument hook-up, see "Accessories and spare parts".	
Size	
EN 837-1	<ul style="list-style-type: none"> ■ 2 x G 1/2, female thread ■ 2 x G 1/2 B, male thread
ANSI/B1.20.1	2 x 1/2 NPT, male thread
EN 61518	Flange with differential pressure connection
Restrictor	<ul style="list-style-type: none"> ■ Without ■ Ø 0.6 mm [0.024"], stainless steel ■ Ø 0.3 mm [0.012"], stainless steel

Other process connections on request

Material		
Material (wetted)		
Measuring flanges with process connection	Model 732.14 and 733.14	<ul style="list-style-type: none"> ■ Stainless steel 316L ■ Hastelloy C276
	Model 762.14 and 763.14	Monel 2.4360
Sealing	FPM/FKM Other materials on request	
Venting of the media chambers	Model 732.14 and 733.14	<ul style="list-style-type: none"> ■ Stainless steel 316L ■ Hastelloy C276
	Model 762.14 and 763.14	Monel 2.4360
Diaphragm element, model 732.14 and 733.14	Span ≤ 0.25 bar [3.63 psi]	<ul style="list-style-type: none"> ■ Stainless steel 316L ■ Hastelloy C276
	Span > 0.25 bar [3.63 psi]	<ul style="list-style-type: none"> ■ Stainless steel 316L ■ NiCr alloy (Inconel) ■ Hastelloy C276
Diaphragm element, model 762.14 and 763.14	<ul style="list-style-type: none"> ■ Monel 2.4360 ■ Hastelloy C276 	
Material (in contact with the environment)		
Flange connecting screws	PN 40 ... PN 100	Stainless steel
	PN 250 ... PN 650	Steel, corrosion-protected
Measuring chamber	Stainless steel, stainless steel/Monel, stainless steel/Hastelloy C276	
Case	Stainless steel, safety level "S1" per EN 837: With blow-out device	
Movement, bayonet ring	Stainless steel	
Dial	Aluminium, white, black lettering	
Window	<ul style="list-style-type: none"> ■ Laminated safety glass ■ Polycarbonate 	

Operating conditions	
Medium temperature range	<ul style="list-style-type: none"> ■ -20 ... 100 °C [-4 ... +212 °F] ■ +200 °C [+392 °F] maximum
Ambient temperature range	<ul style="list-style-type: none"> ■ -20 ... +60 °C [-4 ... +140 °F] ■ -40 ... +60 °C [-40 ... +140 °F]¹⁾
Storage temperature range	-20 ... +60 °C [-4 ... 140 °F]
Pressure limitation	
Steady	Full scale value
Fluctuating	0.9 x full scale value
Ingress protection per IEC/EN 60529	<ul style="list-style-type: none"> ■ IP54 ■ IP65²⁾ ■ IP66 (application test required)

1) Only selectable in combination with silicone oil case filling

2) Ingress protection IP65 for instruments with case filling

Other versions

- Oil- and grease-free
- Oil- and grease-free for oxygen
- For hydrogen¹⁾
- Silicone-free
- Per NACE²⁾ MR 0175 / ISO 15156, use in H₂S-containing environments in oil and gas production
- Per NACE²⁾ MR 0103 / ISO 17945, metals resistant to sulfide stress cracking
- With pre-volume deflagration flame arrester³⁾ for connection to zone 0 (EPL Ga); model 910.21; see data sheet AC 91.02
- Differential pressure gauge with switch contacts, high overload safety, model DPGS43HP; see data sheet PV 27.13
- Differential pressure gauge with electrical output signal, high overload safety, model DPGT43HP ; see data sheet PV 17.13

1) Only with gold-plated diaphragm element and application-specific test

2) General information about NACE standards, see data sheet IN 00.21

3) Only for instruments with Ex approval

Approvals

Logo	Description	Region
	EU declaration of conformity Pressure equipment directive PS > 200 bar, module A, pressure accessory	European Union

Optional approvals

Logo	Description	Region
	EU declaration of conformity	European Union
	ATEX directive Hazardous areas Gas II 2G Ex h IIC T6 ... T1 Gb X Dust II 2D Ex h IIIC T85 °C T450 °C Db X	
	EAC Hazardous areas	Eurasian Economic Community
	Ex Ukraine Hazardous areas	Ukraine
	PAC Kazakhstan Metrology, measurement technology	Kazakhstan
-	MChS Permission for commissioning	Kazakhstan
	PAC Ukraine Metrology, measurement technology	Ukraine
-	PAC China Metrology, measurement technology	China
-	CRN Safety (e.g. electr. safety, overpressure, ...)	Canada


Certificates (option)

Certificates	
Certificates	<ul style="list-style-type: none"> ■ 2.2 test report per EN 10204 (e.g. state-of-the-art manufacturing, indication accuracy) ■ 3.1 inspection certificate per EN 10204 (e.g. material proof for wetted metal parts, indication accuracy)
Recommended calibration interval	1 year (dependent on conditions of use)

→ For approvals and certificates, see website

Dimensions in mm [in]

Process connection: 2 x G 1/2, female thread

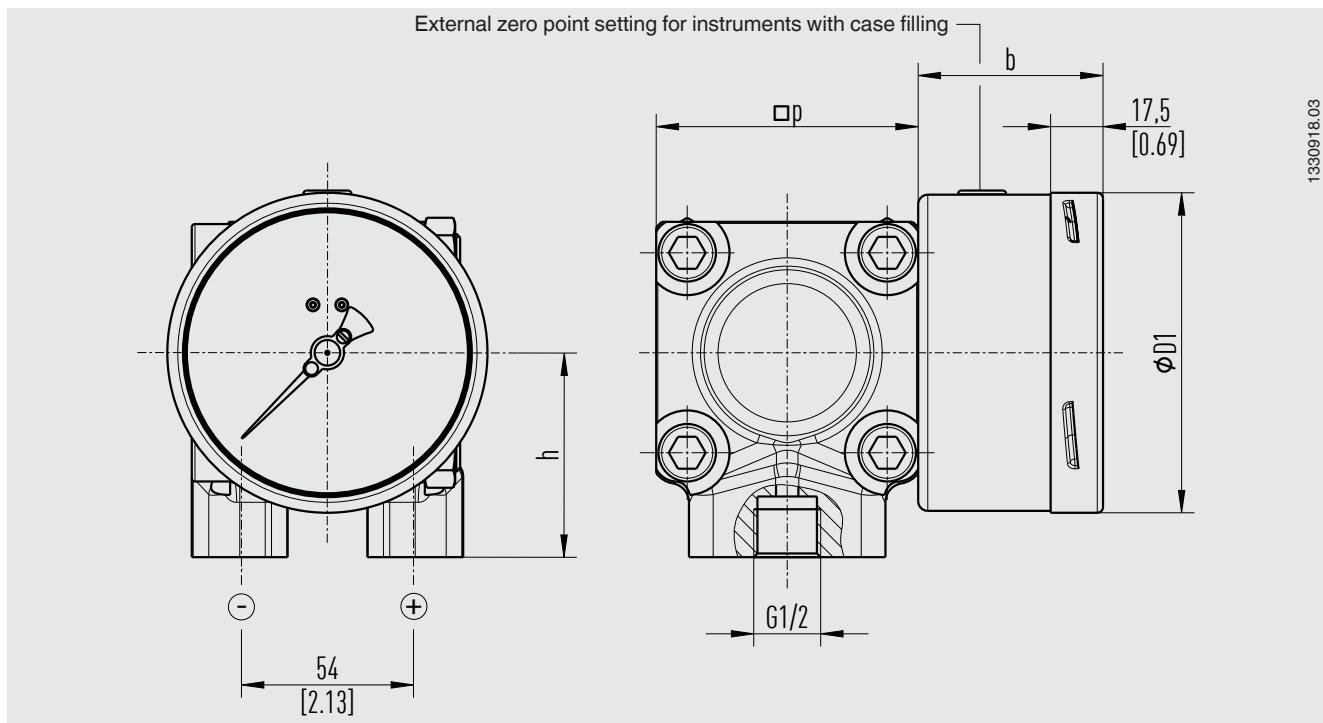

Pressure ratings PN 40 ... PN 100

NS	Scale range ¹⁾	Dimensions in mm [in]				Weight in kg [lb]	
		b	D_1	$h \pm 1$	$p \square$	Unfilled	Filled
100 [4"]	≤ 0.16 bar [2.3 psi]	58.5 [2.3]	101 [4.0]	86 [3.4]	140 [5.5]	12.1 [26.7]	12.7 [28]
	≥ 0.25 bar [3.6 psi]	58.5 [2.3]	101 [4.0]	64 [2.5]	82 [3.2]	3.6 [7.9]	4.2 [9.3]
160 [6"]	≤ 0.16 bar [2.3 psi]	65.5 [2.6]	161 [6.3]	86 [3.4]	140 [5.5]	12.5 [27.6]	14.2 [31.1]
	≥ 0.25 bar [3.6 psi]	65.5 [2.6]	161 [6.3]	64 [2.5]	82 [3.2]	4 [8.8]	5.7 [12.6]

1) The dimensions of customer-specific scale ranges which are between 0.16 bar [2.3 psi] and 0.25 bar [3.6 psi] are defined after an application-specific test.

Pressure rating PN 250

NS	Scale range ¹⁾	Dimensions in mm [in]				Weight in kg [lb]	
		b	D_1	$h \pm 1$	$p \square$	Unfilled	Filled
100 [4"]	≤ 0.25 bar [3.6 psi]	58.5 [2.3]	101 [4.0]	86 [3.4]	140 [5.5]	13.1 [28.9]	13.7 [30.2]
	≥ 0.4 bar [5.8 psi]	58.5 [2.3]	101 [4.0]	64 [2.5]	82 [3.2]	3.9 [8.6]	4.5 [9.9]
160 [6"]	≤ 0.25 bar [3.6 psi]	65.5 [2.6]	161 [6.3]	86 [3.4]	140 [5.5]	13.5 [29.8]	15.2 [33.5]
	≥ 0.4 bar [5.8 psi]	65.5 [2.6]	161 [6.3]	64 [2.5]	82 [3.2]	4.3 [9.5]	6 [13.2]

1) The dimensions of customer-specific scale ranges which are between 0.25 bar [3.6 psi] and 0.4 bar [5.8 psi] are defined after an application-specific test.

Pressure ratings PN 400 ... PN 650

NS	Dimensions in mm [in]				Weight in kg [lb]	
	b	D_1	$h \pm 1$	$p \square$	Unfilled	Filled
100 [4"]	58.5 [2.3]	101 [4.0]	64 [2.5]	86 [3.4]	4.5 [9.9]	5.1 [11.2]
160 [6"]	65.5 [2.6]	161 [6.3]	64 [2.5]	86 [3.4]	4.9 [10.8]	6.6 [14.6]


Accessories and spare parts

Model	Description	Order number
	910.33 Adhesive label set for red and green circular arcs → See data sheet AC 08.03	-
	NS 100 [4"]	14238945
	NS 160 [6"]	14228352
	910.17 Sealings → See data sheet AC 09.08	On request
	910.13 Overpressure protector → See data sheet AC 09.04	On request
	IV315 3-valve manifold Process connection / instrument connection: 2 x G 1/2, male thread / 2 x G 1/2, pressure screw	81640945
	3-valve manifold Process connection / instrument connection: 2 x 1/2 NPT, male thread / 2 x G 1/2, pressure screw	36709683
	IV515 5-valve manifold Process connection / instrument connection / vent connection: 2 x G 1/2, male thread / 2 x G 1/2, pressure screw / 2 x G 1/4, female thread	83141757
	5-valve manifold Process connection / instrument connection / vent connection: 2 x 1/2 NPT, male thread / 2 x G 1/2, pressure screw / 2 x G 1/4, female thread	84050640
	Valve manifolds for differential pressure measuring instruments → See data sheet AC 09.23	On request
-	Instrument mounting bracket for wall or pipe mounting Steel, silver painted	2393340
	Instrument mounting bracket for wall or pipe mounting Stainless steel	2094941

Accessories

Dimensions in mm [in]

Representation with mounting bracket for wall or pipe mounting and fitted 5-valve manifold

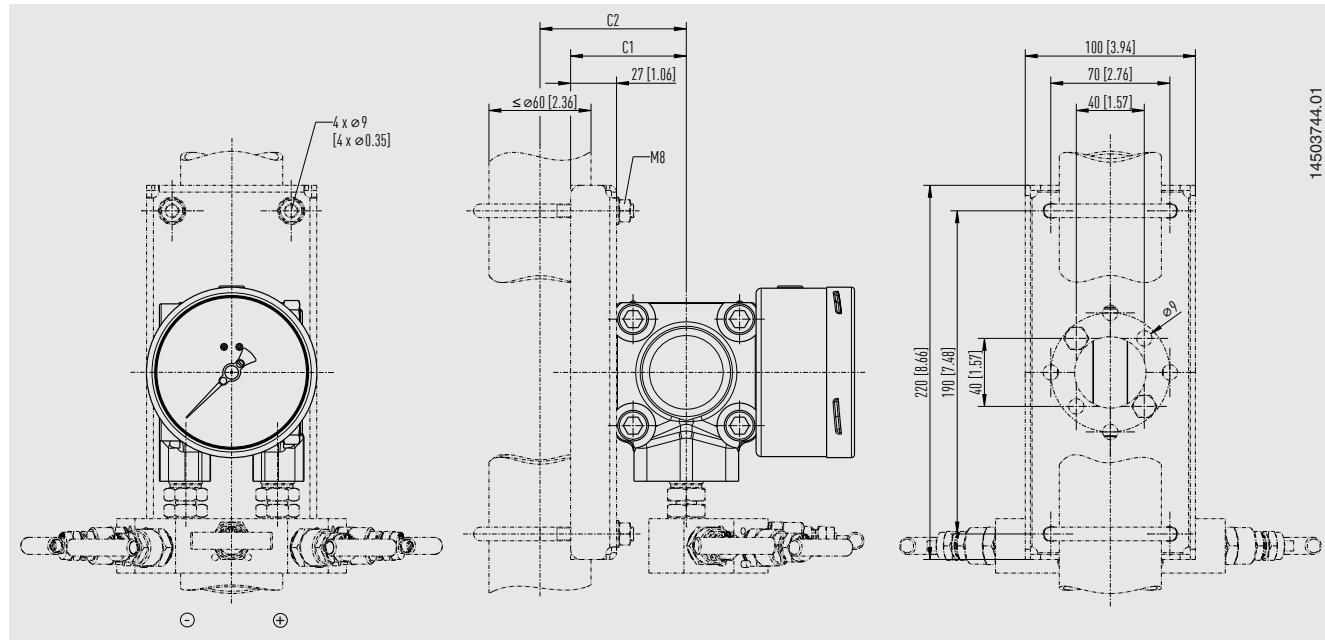

Pressure ratings PN 40 ... PN 100

NS	Scale range ¹⁾	Dimensions in mm [in]	
		C1	C2
100 [4"]	≤ 0.16 bar [2.3 psi]	97 [3.82]	115 [4.53]
	≥ 0.25 bar [3.6 psi]	68 [2.68]	86 [3.39]
160 [6"]	≤ 0.16 bar [2.3 psi]	97 [3.82]	115 [4.53]
	≥ 0.25 bar [3.6 psi]	68 [2.68]	86 [3.39]

1) The dimensions of customer-specific scale ranges which are between 0.16 bar [2.3 psi] and 0.25 bar [3.6 psi] are defined after an application-specific test.

Pressure rating PN 250

NS	Scale range ¹⁾	Dimensions in mm [in]	
		C1	C2
100 [4"]	≤ 0.25 bar [3.6 psi]	97 [3.82]	115 [4.53]
	≥ 0.4 bar [5.8 psi]	68 [2.68]	86 [3.39]
160 [6"]	≤ 0.25 bar [3.6 psi]	97 [3.82]	115 [4.53]
	≥ 0.4 bar [5.8 psi]	68 [2.68]	86 [3.39]

1) The dimensions of customer-specific scale ranges which are between 0.25 bar [3.6 psi] and 0.4 bar [5.8 psi] are defined after an application-specific test.

Pressure ratings PN 400 ... PN 650

NS	Dimensions in mm [in]	
	C1	C2
100 [4"]	70 [2.76]	88 [3.46]
160 [6"]	70 [2.76]	88 [3.46]

Ordering information

Model / Nominal size / Scale range / Scale layout (linear pressure or square root incrementation) / Max. working pressure (static pressure) ... bar / Process connection / Connection location / Options



© 10/2008 WIKA Alexander Wiegand SE & Co. KG, all rights reserved.
The specifications given in this document represent the state of engineering at the time of publishing.
We reserve the right to make modifications to the specifications and materials.
In case of a different interpretation of the translated and the English data sheet, the English wording shall prevail.



WIKA Alexander Wiegand SE & Co. KG
Alexander-Wiegand-Straße 30
63911 Klingenberg/Germany
Tel. +49 9372 132-0
info@wika.de
www.wika.de