

# General Specifications

## EJA438W and EJA438N Diaphragm Sealed Gauge Pressure Transmitters

**DP** *harp*


**GS 01C22J03-00EN**

[Style: S2]

Diaphragm seal is used to prevent process medium from entering directly into the pressure-sensing assembly of the pressure transmitter. It is connected to the transmitter using capillary filled with fill fluid.

Models EJA438W and EJA438N Diaphragm Sealed Gauge Pressure Transmitters can be used to measure liquid, gas or steam pressure. They output a 4 to 20 mA DC signal corresponding to the measured pressure.

The models EJA438W and EJA438N feature remote setup and monitoring through communications with the model BT200/100 BRAIN TERMINAL, CENTUM CS/XL system etc.

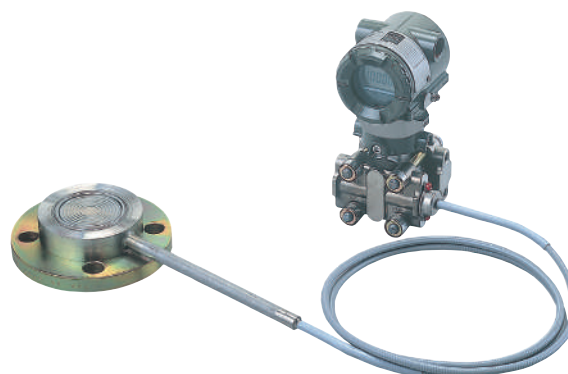

### ■ STANDARD SPECIFICATIONS

Refer to GS 01C22T02-00EN for FOUNDATION Fieldbus communication type and GS 01C22T03-00EN for PROFIBUS PA communication type marked with “◇”.

#### Measurement Ranges:

| Capsule | Measurement Span                                  | Measurement Range                                   |
|---------|---------------------------------------------------|-----------------------------------------------------|
| A *1    | 0.06 to 3 MPa<br>{0.6 to 30 kgf/cm <sup>2</sup> } | -0.1 to 3 MPa<br>{-1 to 30 kgf/cm <sup>2</sup> }    |
| B       | EJA438W<br>*1                                     | 0.46 to 14 MPa<br>{4.6 to 140 kgf/cm <sup>2</sup> } |
|         | EJA438N<br>*1                                     | 0.46 to 7 MPa<br>{4.6 to 70 kgf/cm <sup>2</sup> }   |

\*1: Measurement range is within the flange rating.

#### Output Signal “◇”:

4 to 20 mA DC, 2-wire system with digital communication

#### Failure Alarm:

Output status at CPU failure and hardware error;  
Up-scale: 110%, 21.6 mA DC or more (standard)  
Down-scale:  
-5%, 3.2 mA DC or less  
-2.5%, 3.6 mA DC or less (Optional code /F1)  
Note: Applicable for Output signal code D and E

#### Supply Voltage “◇”:

10.5 to 42 V DC for general use and flameproof type  
10.5 to 32 V DC for lightning protector (Optional code /A)  
10.5 to 30 V DC for intrinsically safe, Type n, nonincendive, or non-sparking type  
10.5 to 28 V DC for TIIS intrinsically safe type

#### Conditions of Communication Line “◇”:

Power supply voltage; 16.4 to 42 V DC  
Load resistance; See Figure 1.  
Note: In case of an intrinsically safe transmitter, external load resistance includes safety barrier resistance.  
Communication distance;  
2 km, when CEV polyethylene-insulated PVC-sheathed control cables are used.  
Note: Communication distance varies depends on kind of cable.

Load capacitance; 0.22  $\mu$ F or less.  
Load inductance; 3.3 mH or less.  
Spacing from power line; 15 cm or more.  
Input impedance of receiver connected receiving resistance; 10 k $\Omega$  or more at 2.4 kHz  
(See Optional Specifications for Intrinsically safe type)

#### Accuracy:

See Table 2.

#### Ambient Temperature Limits:

-40 to 60 °C (-40 to 140 °F) (general-use type)  
-30 to 60 °C (-22 to 140 °F) (with integral indicator)  
Note : The ambient temperature limits must be within the fill fluid operating temperature range, see Table 1.  
(See ‘Optional Specifications’ for Explosion-protected types)

#### Ambient Temperature Effect:

See Table 2.

#### Process Temperature Limits:

See Table 1.  
(See ‘Optional Specifications’ for Explosion-protected types)

#### Ambient Humidity Limits:

5 to 100 % R.H.(at 40 °C)

#### Working Pressure Limits:

2.7 kPa abs{20 mmHg abs}to max. measurement rangevalue.  
Note: The working pressure must be within flange rating pressure.

For atmospheric pressure or below, see Figure 2.

#### Power Supply Effect “◇”:

$\pm 0.005$  %/V (21.6 to 32 V DC, 350  $\Omega$ )

#### Mounting:

Transmitter; 2-inch pipe mounting  
Diaphragm seals; flange mounting

**Mounting Flange Rating:**

See 'Model and Suffix Codes.'

Flange conforming to ANSI are serration-worked on the gasket surfaces (ANSI B16.5)

Note: For model EJA438W wetted parts material code H, T, or U, no serration is worked.

**Degrees of Protection:**

IP67, Type 4X

**Explosion-protected Construction:**

See 'Optional Specification.'

**Electrical Connection:**

See 'Model and Suffix Codes.'

**Amplifier Housing:**

Cast aluminum alloy or JIS SCS14A stainless steel (optional)

**Painting:**

Polyurethane resin baked finish

Deep sea moss green (Munsell 0.6GY3.1/2.0)

**Integral Indicator:**

LCD digital indicator (optional)

**Transmitter Material:**

Cover flange; JIS SCS14A

Cover flange bolts; See 'Model and Suffix Codes.'

**Diaphragm Seal Material:**

Diaphragm and other wetted parts;

See 'Model and Suffix Codes.'

Capillary tube; JIS SUS316

Protection tube; JIS SUS304

PVC-sheathed (Max. operating temperature of PVC, 100 °C (212 °F))

Fill fluid; See Table 1.

**Damping Time Constant:**

(Sum of time constants for amplifier assembly and capsule assembly with diaphragm seal)

Amplifier assembly time constant;

Can be set in 9 increments from 0.2 to 64 sec.

Capsule assembly time constant;

| Capsule             | A           | B           |
|---------------------|-------------|-------------|
| Time Constant (sec) | Approx. 0.2 | Approx. 0.2 |

Approximate values obtained at normal temperature when the capillary length is 5 m, process flange size/material code A, B, C and the fill fluid code is A.

**External Zero Adjustment “◇”:**

Continuously adjustable Resolution; 0.01 % of span

**Zero Adjustment Limits:**

Zero can be fully elevated or suppressed as long as low and high range values are within the measurement range low and high limits of the capsule.

**Tag Plate:**

JIS SUS304 or SUS316

**Weight:**

8.3 kg (18.3 lb) Model EJA438W with 50 mm JIS 10K flange, capillary length 5 m; with integral indicator and mounting bracket.

13.4 kg (29.6 lb) Model EJA438N with 100 mm JIS 10K flange, X<sub>2</sub>=100, capillary length 5 m; with integral indicator and mounting bracket.

Add 1.4 kg (3.1 lb) for JIS SCS14A stainless steel amplifier housing.

**EMC Conformity Standards “◇”:**

EN61326-1 Class A, Table2 (For use in industrial locations)

EN61326-2-3

**European Pressure Equipment Directive 97/23/EC:**

Sound Engineering Practice

**Safety Requirement Standards:**

EN61010-1

- Altitude of installation site: Max. 2,000 m above sea level
- Installation category: I
- Pollution degree: 2
- Indoor/Outdoor use

**< Settings When Shipped > “◇”**

|                                      |                                                                                                                                                                                                                        |
|--------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Tag Number                           | As specified in order *1                                                                                                                                                                                               |
| Output Mode                          | 'Linear'                                                                                                                                                                                                               |
| Display Mode                         | 'Linear'                                                                                                                                                                                                               |
| Operation Mode                       | 'Normal' unless otherwise specified in order                                                                                                                                                                           |
| Damping Time Constant                | '2 sec.'                                                                                                                                                                                                               |
| Calibration Range Lower Range Value  | As specified in order                                                                                                                                                                                                  |
| Calibration Range Higher Range Value | As specified in order                                                                                                                                                                                                  |
| Calibration Range Units              | Selected from mmH <sub>2</sub> O, mmAq, mmWG, mmHg, Pa, hPa, kPa, MPa, mbar, bar, gf/cm <sup>2</sup> , kgf/cm <sup>2</sup> , inH <sub>2</sub> O, inHg, ftH <sub>2</sub> O, or psi.<br>(Only one unit can be specified) |

\*1: Up to 16 alphanumeric characters (including - and .) will be entered in the amplifier memory.

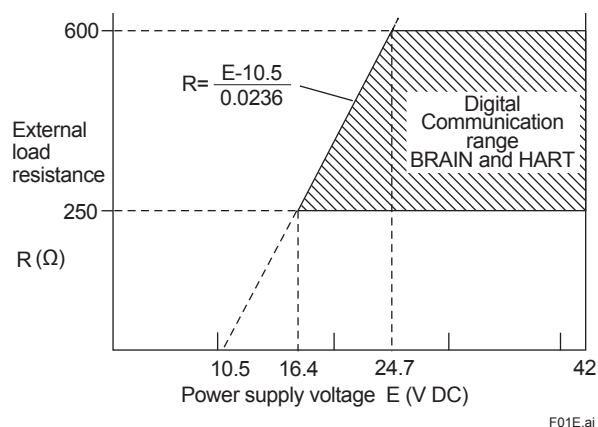


Figure 1. Relationship Between Power Supply Voltage and External Load Resistance

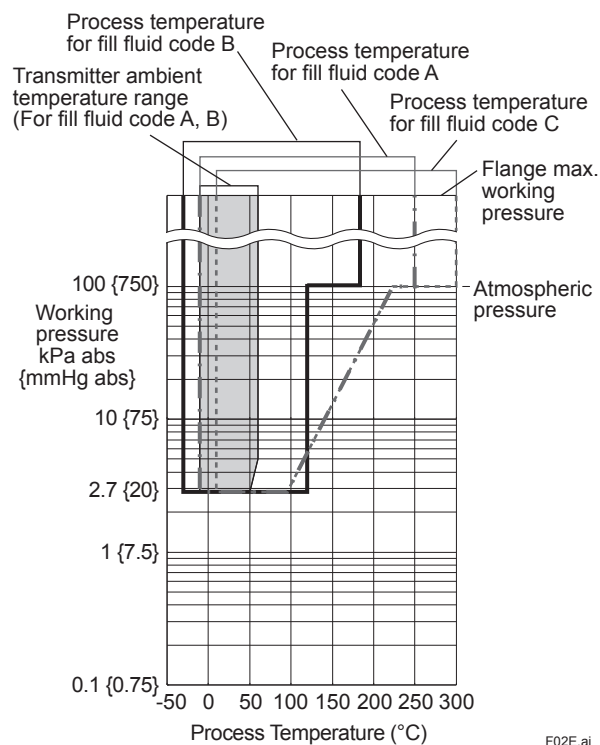


Figure 2. Working Pressure and Process Temperature

Table 1. Process Temperature and Ambient Temperature

|                        | Silicone Oil                                                      |                                                                    |                                                                  | Fluorinated Oil                                                   | Ethylene Glycol                                                    |
|------------------------|-------------------------------------------------------------------|--------------------------------------------------------------------|------------------------------------------------------------------|-------------------------------------------------------------------|--------------------------------------------------------------------|
|                        | Fill Fluid Code 'A'                                               | Fill Fluid Code 'B'                                                | Fill Fluid Code 'C'                                              | Fill Fluid Code 'D'                                               | Fill Fluid Code 'E'                                                |
| Process Temperature *1 | -10 to 250 $^{\circ}\text{C}$<br>( 14 to 482 $^{\circ}\text{F}$ ) | -30 to 180 $^{\circ}\text{C}$<br>( -22 to 356 $^{\circ}\text{F}$ ) | 10 to 300 $^{\circ}\text{C}$<br>( 50 to 572 $^{\circ}\text{F}$ ) | -20 to 120 $^{\circ}\text{C}$<br>( -4 to 248 $^{\circ}\text{F}$ ) | -50 to 100 $^{\circ}\text{C}$<br>( -58 to 212 $^{\circ}\text{F}$ ) |
| Ambient temperature *2 | -10 to 60 $^{\circ}\text{C}$<br>( 14 to 140 $^{\circ}\text{F}$ )  | -15 to 60 $^{\circ}\text{C}$<br>( 5 to 140 $^{\circ}\text{F}$ )    | 10 to 60 $^{\circ}\text{C}$<br>( 50 to 140 $^{\circ}\text{F}$ )  | -10 to 60 $^{\circ}\text{C}$<br>( 14 to 140 $^{\circ}\text{F}$ )  | -40 to 60 $^{\circ}\text{C}$<br>( -40 to 140 $^{\circ}\text{F}$ )  |
| Working pressure       | See Figure 2                                                      |                                                                    |                                                                  | 51 kPa abs or more<br>{380 mmHg abs}                              | Vacuum pressure not allowed                                        |
| Specific gravity *3    | 1.07                                                              | 0.94                                                               | 1.09                                                             | 1.90 to 1.92                                                      | 1.09                                                               |

\*1: See Figure 2 'Working Pressure and Process Temperature.'

\*2: This ambient temperature is the transmitter ambient temperature.

\*3: Approximate values at a temperature of 25  $^{\circ}\text{C}$  (77  $^{\circ}\text{F}$ )

\*4: The pressure transmitter should be installed at least 700 mm below the process connection. However, this value (700 mm) may be affected by ambient temperature, operating pressure, fill fluid or material of the wetted diaphragm. Contact YOKOGAWA when the transmitter can not be installed at least 700 mm below the process connection.

**Table 2. Accuracy and Ambient Temperature Effect (As percent of 'x') \*1**

| Capsule                       |             | A, B<br>(For wetted parts material code S)                                                                                      | A, B<br>(For wetted parts material code H, T, and U)                                                                            |
|-------------------------------|-------------|---------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| Accuracy                      |             | $\pm 0.2 \%$ For $x \geq \text{Pref}$<br>$\pm(0.15 + 0.05 \times \frac{\text{Pref}}{x}) \%$ For $x < \text{Pref}$               | $\pm 0.2 \%$ For $x \geq \text{Pref}$<br>$\pm(0.15 + 0.05 \times \frac{\text{Pref}}{x}) \%$ For $x < \text{Pref}$               |
| Ambient temperature effect *2 | Zero shift  | $\pm(0.2 + 0.5 \times \frac{\text{Pref}}{x}) \%$ / 50 °C                                                                        | $\pm(0.3 + 0.6 \times \frac{\text{Pref}}{x}) \%$ / 50 °C                                                                        |
|                               | Total shift | $\pm 1.4 \%$ / 50 °C For $x \geq \text{Pref}$<br>$\pm(0.7 + 0.7 \times \frac{\text{Pref}}{x}) \%$ / 50 °C For $x < \text{Pref}$ | $\pm 1.6 \%$ / 50 °C For $x \geq \text{Pref}$<br>$\pm(0.8 + 0.8 \times \frac{\text{Pref}}{x}) \%$ / 50 °C For $x < \text{Pref}$ |

\*1: 'x' is the highest value among the absolute value of the lower range value (LRV) and higher range value (HRV), and the span value in a calibration range.

$$\text{Percent of span} = \text{Percent of } x \times \frac{x}{\text{span}}$$

\*2: In case of 6 to 10 m. for capillary length, value of ambient temperature effect is twice that given in the table. The ambient temperature effect specification applies to the range of 0 to 60 °C (32 to 140 °F). (Below 0 °C (32 °F), value is three times that given in the table.)

F03E.ai

**Table 3. Value of 'Pref'**

| Capsule | A                                | B                                 |
|---------|----------------------------------|-----------------------------------|
| Pref    | 0.3 MPa {3 kgf/cm <sup>2</sup> } | 1.4 MPa {14 kgf/cm <sup>2</sup> } |

## ■ MODEL AND SUFFIX CODES

### ● Model EJA438W [Flange size: 2-inch (50 mm) and 3-inch (80 mm)]

| Model                          | Suffix Codes |  | Description                                                                         |                                  |
|--------------------------------|--------------|--|-------------------------------------------------------------------------------------|----------------------------------|
| EJA438W                        | .....        |  | Diaphragm Sealed Gauge Pressure transmitter (Flush diaphragm type)                  |                                  |
| Output Signal                  | -D .....     |  | 4 to 20 mA DC with digital communication (BRAIN protocol)                           |                                  |
|                                | -E .....     |  | 4 to 20 mA DC with digital communication (HART protocol, refer to GS 01C22T01-00EN) |                                  |
|                                | -F .....     |  | Digital communication (FOUNDATION Fieldbus protocol, refer to GS 01C22T02-00EN)     |                                  |
|                                | -G .....     |  | Digital communication (PROFIBUS PA protocol, refer to GS 01C22T03-00EN)             |                                  |
| Measurement span (capsule)     | A .....      |  | 0.06 to 3 MPa {0.6 to 30 kgf/cm <sup>2</sup> }{8.6 to 430 psi}{0.6 to 30 bar}       |                                  |
|                                | B .....      |  | 0.46 to 14 MPa {4.6 to 140 kgf/cm <sup>2</sup> }{66 to 2000 psi}{4.6 to 140 bar}    |                                  |
| Wetted parts material *1       | S .....      |  | [Diaphragm]                                                                         | [Others]                         |
|                                | H# .....     |  | JIS SUS316L                                                                         | JIS SUS316L *6                   |
|                                | T .....      |  | Hastelloy C-276 *7                                                                  | Hastelloy C-276 *7               |
|                                | U .....      |  | Tantalum                                                                            | Tantalum                         |
|                                |              |  | Titanium                                                                            | Titanium                         |
| Process flange rating          | J1 .....     |  | JIS 10K                                                                             |                                  |
|                                | J2 .....     |  | JIS 20K                                                                             |                                  |
|                                | J4 .....     |  | JIS 40K                                                                             |                                  |
|                                | J6 .....     |  | JIS 63K                                                                             |                                  |
|                                | A1 .....     |  | ANSI Class 150                                                                      |                                  |
|                                | A2 .....     |  | ANSI Class 300                                                                      |                                  |
|                                | A4 .....     |  | ANSI Class 600                                                                      |                                  |
|                                | D2 .....     |  | DIN PN10/16                                                                         |                                  |
|                                | D4 .....     |  | DIN PN25/40                                                                         |                                  |
|                                | D5 .....     |  | DIN PN64                                                                            |                                  |
|                                | P1 .....     |  | JPI Class 150                                                                       |                                  |
|                                | P2 .....     |  | JPI Class 300                                                                       |                                  |
|                                | P4 .....     |  | JPI Class 600                                                                       |                                  |
| Process flange size / material | A .....      |  | 2-inch (50 mm) / JIS S25C                                                           |                                  |
|                                | B .....      |  | 2-inch (50 mm) / JIS SUS304 *8                                                      |                                  |
|                                | C .....      |  | 2-inch (50 mm) / JIS SUS316 *9                                                      |                                  |
|                                | D .....      |  | 3-inch (80 mm) / JIS S25C                                                           |                                  |
|                                | E .....      |  | 3-inch (80 mm) / JIS SUS304 *8                                                      |                                  |
|                                | F .....      |  | 3-inch (80 mm) / JIS SUS316 *9                                                      |                                  |
| Cover flange bolts material    | A .....      |  | JIS SCM435                                                                          |                                  |
|                                | B .....      |  | JIS SUS630                                                                          |                                  |
| Fill fluid                     | -A*2 .....   |  | [Process temp.]                                                                     | [Ambient temp.]                  |
|                                | -B .....     |  | -10 to 250 °C                                                                       | -10 to 60 °C                     |
|                                | -C*3 .....   |  | -30 to 180 °C                                                                       | -15 to 60 °C                     |
|                                | -D*4 .....   |  | 10 to 300 °C                                                                        | 10 to 60 °C                      |
|                                | -E .....     |  | -20 to 120 °C                                                                       | -10 to 60 °C                     |
|                                |              |  | -50 to 100 °C                                                                       | -40 to 60 °C                     |
| —                              | A .....      |  | Always A                                                                            |                                  |
| Capillary length (m)           | □□*5 .....   |  | Specify capillary length from 1 to 10 m in □□ . (Example for 2 m: 02)               |                                  |
| Installation                   | -9 .....     |  | Horizontal impulse piping type, left side high pressure                             |                                  |
| Electrical connection          | 0 .....      |  | G1/2 female, one electrical connection                                              |                                  |
|                                | 2 .....      |  | 1/2 NPT female, two electrical connections without blind plug                       |                                  |
|                                | 3 .....      |  | Pg 13.5 female, two electrical connections without blind plug                       |                                  |
|                                | 4 .....      |  | M20 female, two electrical connections without blind plug                           |                                  |
|                                | 5 .....      |  | G1/2 female, two electrical connections and a blind plug                            |                                  |
|                                | 7 .....      |  | 1/2 NPT female, two electrical connections and a blind plug                         |                                  |
|                                | 8 .....      |  | Pg 13.5 female, two electrical connections and a blind plug                         |                                  |
|                                | 9 .....      |  | M20 female, two electrical connections and a blind plug                             |                                  |
|                                | A .....      |  | G1/2 female, two electrical connections and a SUS316 blind plug                     |                                  |
|                                | C .....      |  | 1/2 NPT female, two electrical connections and a SUS316 blind plug                  |                                  |
|                                | D .....      |  | M20 female, two electrical connections and a SUS316 blind plug                      |                                  |
| Integral indicator             | D .....      |  | Digital indicator                                                                   |                                  |
|                                | E .....      |  | Digital indicator with the range setting switch *10                                 |                                  |
|                                | N .....      |  | (None)                                                                              |                                  |
| Mounting bracket               | A .....      |  | JIS SECC                                                                            | 2-inch pipe mounting (flat type) |
|                                | B .....      |  | JIS SUS304                                                                          | 2-inch pipe mounting (flat type) |
|                                | J .....      |  | JIS SUS316                                                                          | 2-inch pipe mounting (flat type) |
|                                | N .....      |  | (None)                                                                              |                                  |
| Optional codes                 | /□           |  | Optional specification                                                              |                                  |

The “►” marks indicate the most typical selection for each specification. Example: EJA438W-DASA1AA-AA02-92NA/□

The ‘#’ marks indicate the construction materials conform to NACE material recommendations per MR01-75. For the use of SUS316 material, there may be certain limitations for pressure and temperature. Please refer to NACE standards for details.

- \*1: ⚠ Users must consider the characteristics of selected wetted parts material and the influence of process fluids. The use of inappropriate materials can result in the leakage of corrosive process fluids and cause injury to personnel and/or damage to plant facilities. It is also possible that the diaphragm itself can be damaged and that material from the broken diaphragm and the fill fluid can contaminate the user's process fluids.  
Be very careful with highly corrosive process fluids such as hydrochloric acid, sulfuric acid, hydrogen sulfide, sodium hypochlorite, and high-temperature steam (150°C [302°F] or above). Contact Yokogawa for detailed information of the wetted parts material.
- \*2: In case of Wetted parts material code T (Tantalum), the process temperature limit is -10 to 200 °C.
- \*3: Wetted parts material code T (Tantalum) cannot be applied.
- \*4: Even in case where Fill fluid code D (fluorinated oil) is selected, if degrease cleansing treatment or both degrease cleansing and dehydrating treatment for the wetted parts is required, specify Optional code K1 or K5.
- \*5: In case of Wetted parts material code H (Hastelloy C), T (Tantalum), and U (Titanium) or Fill fluid code C (for high temperature use), specify capillary length from 1 to 5 m.
- \*6: JIS SUS316L or ASTM grade 316L.
- \*7: Hastelloy C-276 or ASTM N10276.
- \*8: JIS SUS304 or ASTM grade 304. Forged version may be used.
- \*9: JIS SUS316 or ASTM grade 316. Forged version may be used.
- \*10: Not applicable for Output signal code F and G.

# • Model EJA438N [Flange size: 4-inch (100 mm)]

| Model                           | Suffix Codes                                                                                                                                                                                       | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>EJA438N</b>                  | .....                                                                                                                                                                                              | Diaphragm sealed gauge pressure transmitter (Extended diaphragm type)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Output Signal                   | <b>-D</b> .....<br><b>-E</b> .....<br><b>-F</b> .....<br><b>-G</b> .....                                                                                                                           | 4 to 20 mA DC with digital communication (BRAIN protocol)<br>4 to 20 mA DC with digital communication (HART protocol, refer to GS 01C22T01-00EN)<br>Digital communication (FOUNDATION Fieldbus protocol, refer to GS 01C22T02-00EN)<br>Digital communication (PROFIBUS PA protocol, refer to GS 01C22T03-00EN)                                                                                                                                                                                                                                                                                                                                                                                        |
| Measurement span (capsule)      | <b>A</b> .....<br><b>B</b> .....                                                                                                                                                                   | 0.06 to 3 MPa {0.6 to 30 kgf/cm <sup>2</sup> } {8.6 to 430 psi} {0.6 to 30 bar}<br>0.46 to 7 MPa {4.6 to 70 kgf/cm <sup>2</sup> } {66 to 1000 psi} {4.6 to 70 bar}                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Wetted parts material *1        | <b>S</b> .....                                                                                                                                                                                     | [Diaphragm] JIS SUS316L [Pipe] JIS SUS316 [Others] JIS SUS316 *5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Flange rating                   | <b>J1</b> .....<br><b>J2</b> .....<br><b>J4</b> .....<br><b>A1</b> .....<br><b>A2</b> .....<br><b>D2</b> .....<br><b>D4</b> .....                                                                  | JIS 10K<br>JIS 20K<br>JIS 40K<br>ANSI Class 150<br>ANSI Class 300<br>DIN PN10/16<br>DIN PN25/40<br><br><b>P1</b> . . . JPI Class 150<br><b>P2</b> . . . JPI Class 300                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Diaphragm extension length (X2) | <b>2</b> .....<br><b>4</b> .....<br><b>6</b> .....                                                                                                                                                 | X2 = 50 mm<br>X2 = 100 mm<br>X2 = 150 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Process flange size / material  | <b>G</b> .....<br><b>H</b> .....<br><b>J</b> .....                                                                                                                                                 | 4-inch (100 mm) / JIS S25C<br>4-inch (100 mm) / JIS SUS304 *6<br>4-inch (100 mm) / JIS SUS316 *7                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Cover flange bolts material     | <b>A</b> .....<br><b>B</b> .....                                                                                                                                                                   | JIS SCM435<br>JIS SUS630                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Fill fluid                      | <b>A</b> .....<br><b>B</b> .....<br><b>C</b> .....<br><b>D</b> *2 .....<br><b>E</b> .....                                                                                                          | [Process temp.] [Ambient temp.]<br>For general use (silicone oil) -10 to 250 °C -10 to 60 °C<br>For general use (silicone oil) -30 to 180 °C -15 to 60 °C<br>For high temperature use (silicone oil) 10 to 300 °C 10 to 60 °C<br>For oil-prohibited use (fluorinated oil) -20 to 120 °C -10 to 60 °C<br>For low temperature use (ethylene glycol) -50 to 100 °C -40 to 60 °C                                                                                                                                                                                                                                                                                                                          |
| —                               | <b>B</b> .....                                                                                                                                                                                     | Always B                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Capillary length (m) *3*4       | <input type="checkbox"/> <input type="checkbox"/> .....                                                                                                                                            | Specify capillary length from 1 to 10 m in <input type="checkbox"/> <input type="checkbox"/> . (Example for 2 m : 02)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Installation                    | <b>-9</b> .....                                                                                                                                                                                    | Horizontal impulse piping type, left side high pressure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Electrical connection           | <b>0</b> .....<br><b>2</b> .....<br><b>3</b> .....<br><b>4</b> .....<br><b>5</b> .....<br><b>7</b> .....<br><b>8</b> .....<br><b>9</b> .....<br><b>A</b> .....<br><b>C</b> .....<br><b>D</b> ..... | G1/2 female, one electrical connection<br>1/2 NPT female, two electrical connections without blind plug<br>Pg 13.5 female, two electrical connections without blind plug<br>M20 female, two electrical connections without blind plug<br>G1/2 female, two electrical connections and a blind plug<br>1/2 NPT female, two electrical connections and a blind plug<br>Pg 13.5 female, two electrical connections and a blind plug<br>M20 female, two electrical connections and a blind plug<br>G1/2 female, two electrical connections and a SUS316 blind plug<br>1/2 NPT female, two electrical connections and a SUS316 blind plug<br>M20 female, two electrical connections and a SUS316 blind plug |
| Integral indicator              | <b>D</b> .....<br><b>E</b> .....<br><b>N</b> .....                                                                                                                                                 | Digital indicator<br>Digital indicator with the range setting switch *8<br>(None)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Mounting bracket                | <b>A</b> .....<br><b>B</b> .....<br><b>J</b> .....<br><b>N</b> .....                                                                                                                               | JIS SECC 2-inch pipe mounting (flat type)<br>JIS SUS304 2-inch pipe mounting (flat type)<br>JIS SUS316 2-inch pipe mounting (flat type)<br>(None)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Optional codes                  | <input type="checkbox"/>                                                                                                                                                                           | Optional specification                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |

The “►” marks indicate the most typical selection for each specification. Example: EJA438N-DASA12GA-AB02-92NA/☐

\*1: ⚠ Users must consider the characteristics of selected wetted parts material and the influence of process fluids. The use of inappropriate materials can result in the leakage of corrosive process fluids and cause injury to personnel and/or damage to plant facilities. It is also possible that the diaphragm itself can be damaged and that material from the broken diaphragm and the fill fluid can contaminate the user's process fluids.

Be very careful with highly corrosive process fluids such as hydrochloric acid, sulfuric acid, hydrogen sulfide, sodium hypochlorite, and high-temperature steam (150°C [302°F] or above). Contact Yokogawa for detailed information of the wetted parts material.

\*2: Even in case where Fill fluid code D (fluorinated oil) is selected, if degrease cleansing treatment or both degrease cleansing and dehydrating treatment for the wetted parts is required, specify Optional code K1 or K5.

\*3: In case of Fill fluid code C (for high temperature use), specify capillary length from 1 to 5 m.

\*4: The specified capillary length includes the diaphragm extension length(X2) and the flange thickness(t).

\*5: JIS SUS316 or ASTM grade 316.

\*6: JIS SUS304 or ASTM grade 304. Forged version may be used.

\*7: JIS SUS316 or ASTM grade 316. Forged version may be used.

\*8: Not applicable for Output signal code F and G.

• **Model EJA438N [Flange size: 3-inch (80mm)]**

| Model                           | Suffix Codes                                                                                                                                                                                       | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>EJA438N</b>                  | .....                                                                                                                                                                                              | Diaphragm sealed gauge pressure transmitter (Extended diaphragm type)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Output Signal                   | <b>-D</b> .....<br><b>-E</b> .....<br><b>-F</b> .....<br><b>-G</b> .....                                                                                                                           | 4 to 20 mA DC with digital communication (BRAIN protocol)<br>4 to 20 mA DC with digital communication (HART protocol, refer to GS 01C22T01-00EN)<br>Digital communication (FOUNDATION Fieldbus protocol, refer to GS 01C22T02-00EN)<br>Digital communication (PROFIBUS PA protocol, refer to GS 01C22T03-00EN)                                                                                                                                                                                                                                                                                                                                                                                        |
| Measurement span (capsule)      | <b>A</b> .....<br><b>B</b> .....                                                                                                                                                                   | 0.06 to 3 MPa {0.6 to 30 kgf/cm <sup>2</sup> } {8.6 to 430 psi} {0.6 to 30 bar}<br>0.46 to 7 MPa {4.6 to 70 kgf/cm <sup>2</sup> } {66 to 1000 psi} {4.6 to 70 bar}                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Wetted parts material *1        | <b>S</b> .....                                                                                                                                                                                     | [Diaphragm] JIS SUS316L [Pipe] JIS SUS316 [Others] JIS SUS316 *3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Flange rating                   | <b>J1</b> .....<br><b>J2</b> .....<br><b>J4</b> .....<br><b>A1</b> .....<br><b>A2</b> .....<br><b>D2</b> .....<br><b>D4</b> .....<br><b>P1</b> .....<br><b>P2</b> .....                            | JIS 10K<br>JIS 20K<br>JIS 40K<br>ANSI Class 150<br>ANSI Class 300<br>DIN PN10/16<br>DIN PN25/40<br>JPI Class 150<br>JPI Class 300                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Diaphragm extension length (X2) | <b>2</b> .....<br><b>4</b> .....<br><b>6</b> .....                                                                                                                                                 | X2 = 50 mm<br>X2 = 100 mm<br>X2 = 150 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Process flange size / material  | <b>D</b> .....<br><b>E</b> .....<br><b>F</b> .....                                                                                                                                                 | 3-inch (80 mm) / JIS S25C<br>3-inch (80 mm) / JIS SUS304 *4<br>3-inch (80 mm) / JIS SUS316 *5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Cover flange bolts material     | <b>A</b> .....<br><b>B</b> .....                                                                                                                                                                   | JIS SCM435<br>JIS SUS630                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Fill fluid                      | <b>-A</b> .....<br><b>-B</b> .....                                                                                                                                                                 | [Process temp.] [Ambient temp.]<br>For general use (silicone oil) -10 to 250 °C -10 to 60 °C<br>For general use (silicone oil) -30 to 180 °C -15 to 60 °C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| —                               | <b>B</b> .....                                                                                                                                                                                     | Always B                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Capillary length (m) *2         | <input type="checkbox"/> <input type="checkbox"/> .....                                                                                                                                            | Specify capillary length from 1 to 5 m in <input type="checkbox"/> <input type="checkbox"/> . (Example for 2 m : 02)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Installation                    | <b>-9</b> .....                                                                                                                                                                                    | Horizontal impulse piping type, left side high pressure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Electrical connection           | <b>0</b> .....<br><b>2</b> .....<br><b>3</b> .....<br><b>4</b> .....<br><b>5</b> .....<br><b>7</b> .....<br><b>8</b> .....<br><b>9</b> .....<br><b>A</b> .....<br><b>C</b> .....<br><b>D</b> ..... | G1/2 female, one electrical connection<br>1/2 NPT female, two electrical connections without blind plug<br>Pg 13.5 female, two electrical connections without blind plug<br>M20 female, two electrical connections without blind plug<br>G1/2 female, two electrical connections and a blind plug<br>1/2 NPT female, two electrical connections and a blind plug<br>Pg 13.5 female, two electrical connections and a blind plug<br>M20 female, two electrical connections and a blind plug<br>G1/2 female, two electrical connections and a SUS316 blind plug<br>1/2 NPT female, two electrical connections and a SUS316 blind plug<br>M20 female, two electrical connections and a SUS316 blind plug |
| Integral indicator              | <b>D</b> .....<br><b>E</b> .....<br><b>N</b> .....                                                                                                                                                 | Digital indicator<br>Digital indicator with the range setting switch *6<br>(None)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Mounting bracket                | <b>A</b> .....<br><b>B</b> .....<br><b>J</b> .....<br><b>N</b> .....                                                                                                                               | JIS SECC 2-inch pipe mounting (flat type)<br>JIS SUS304 2-inch pipe mounting (flat type)<br>JIS SUS316 2-inch pipe mounting (flat type)<br>(None)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Optional codes                  | <input type="checkbox"/> .....                                                                                                                                                                     | Optional specification                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |

The “►” marks indicate the most typical selection for each specification. Example: EJA438N-DASA12DA-AB02-92NA/☐

\*1: Users must consider the characteristics of selected wetted parts material and the influence of process fluids. The use of inappropriate materials can result in the leakage of corrosive process fluids and cause injury to personnel and/or damage to plant facilities. It is also possible that the diaphragm itself can be damaged and that material from the broken diaphragm and the fill fluid can contaminate the user's process fluids.  
Be very careful with highly corrosive process fluids such as hydrochloric acid, sulfuric acid, hydrogen sulfide, sodium hypochlorite, and high-temperature steam (150 °C [302 °F] or above). Contact Yokogawa for detailed information of the wetted parts material.

\*2: The specified capillary length includes the diaphragm extension length(X2) and the flange thickness(t).

\*3: JIS SUS316 or ASTM grade 316.

\*4: JIS SUS304 or ASTM grade 304. Forged version may be used.

\*5: JIS SUS316 or ASTM grade 316. Forged version may be used.

\*6: Not applicable for Output signal code F and G.

## ■ OPTIONAL SPECIFICATIONS (For Explosion Protected type “◇”)

For FOUNDATION Fieldbus explosion protected type, see GS 01C22T02-00EN.

For PROFIBUS PA explosion protected type, see GS 01C22T03-00EN.

| Item                                       | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Code |
|--------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|
| Factory Mutual<br>(FM)                     | FM Explosionproof Approval *1 *3 *4<br>Applicable standard: FM3600, FM3615, FM3810, ANSI/NEMA250<br>Explosionproof for Class I, Division 1, Groups B, C and D<br>Dust-ignitionproof for Class II/III, Division 1, Groups E, F and G<br>Hazardous (classified) locations, indoors and outdoors (NEMA 4X)<br>Division 2, 'SEALS NOT REQUIRED',<br>Temp. Class: T6<br>Amb. Temp.: -40 to 60°C (-40 to 140°F)                                                                                                                                                                                                                                                                                                                                           | FF1  |
|                                            | FM Intrinsically safe Approval *1 *3 *4<br>Applicable standard: FM3600, FM3610, FM3611, FM3810, ANSI/NEMA250<br>Intrinsically Safe for Class I, Division 1, Groups A, B, C & D, Class II, Division 1,<br>Groups E, F & G and Class III, Division 1 Hazardous Locations.<br>Nonincendive for Class I, Division 2, Groups A, B, C & D, Class II, Division 2,<br>Groups E, F & G, and Class III, Division 1 Hazardous Locations.<br>Enclosure: "NEMA 4X", Temp. Class: T4, Amb. Temp.: -40 to 60°C (-40 to 140°F)<br>Intrinsically Safe Apparatus Parameters<br>[Groups A, B, C, D, E, F and G]<br>Vmax=30 V, Imax=165 mA, Pmax=0.9 W, Ci=22.5 nF, Li=730 µH<br>[Groups C, D, E, F and G]<br>Vmax=30 V, Imax=225 mA, Pmax=0.9 W, Ci=22.5 nF, Li=730 µH | FS1  |
|                                            | Combined FF1 and FS1 *1 *3 *4                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | FU1  |
| Canadian Standards<br>Association<br>(CSA) | CSA Explosionproof Approval *1 *3 *4<br>Applicable standard: C22.2 No. 0, No. 0.4, No. 25, No. 30, No. 94, No. 142<br>Certificate: 1089598<br>Explosionproof for Class I, Division 1, Groups B, C and D<br>Dustignitionproof for Class II/III, Division 1, Groups E, F and G<br>Division2 'SEALS NOT REQUIRED', Temp. Class: T4, T5, T6 Encl Type 4x<br>Max. Process Temp.: T4; 120°C (248°F), T5; 100°C (212°F), T6; 85°C (185°F)<br>Amb. Temp.: -40 to 80°C (-40 to 176°F)<br>Process Sealing Certification<br>Dual Seal Certified by CSA to the requirement of ANSI/ISA 12.27.01<br>No additional sealing required.<br>Primary seal failure annunciation: at the zero adjustment screw                                                           | CF1  |
|                                            | CSA Intrinsically safe Approval *1 *3 *4<br>Applicable standard: C22.2 No. 0, No. 0.4, No. 25, No. 30, No. 94, No. 142, No. 157, No. 213<br>Certificate: 1053843<br>Class I, Groups A, B, C and D Class II and III, Groups E, F and G<br>Encl Type 4x, Temp. Class: T4, Amb. Temp.: -40 to 60°C (-40 to 140°F)<br>Vmax=30 V, Imax=165 mA, Pmax=0.9 W, Ci=22.5 nF, Li=730 µH<br>Process Sealing Certification<br>Dual Seal Certified by CSA to the requirement of ANSI/ISA 12.27.01<br>No additional sealing required.<br>Primary seal failure annunciation: at the zero adjustment screw                                                                                                                                                            | CS1  |
|                                            | Combined CF1 and CS1 *1 *3 *4                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | CU1  |

| Item                                   | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Code                    |
|----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|
| IECEX                                  | IECEx Intrinsically safe, type n and Flameproof Approval *3 *4 *9<br>Intrinsically safe and type n<br>Applicable Standard: IEC 60079-0:2004, IEC 60079-11:1999, IEC 60079-15:2005,<br>IEC 60079-26:2005<br>Certificate: IECEx KEM 06.0007X<br>Ex ia IIC T4, Ex nL IIC T4 Enclosure: IP67<br>Amb. Temp.: -40 to 60°C (-40 to 140°F), Max. Process Temp.: 120°C (248°F)<br>Electrical Parameters: [Ex ia] Ui=30 V, Ii=165 mA, Pi=0.9 W, Ci=22.5 nF, Li=730 µH<br>[Ex nL] Ui=30 V, Ci=22.5 nF, Li=730 µH<br>Flameproof<br>Applicable Standard: IEC 60079-0:2004, IEC60079-1:2003<br>Certificate: IECEx KEM 06.0005<br>Ex d IIC T6...T4 Enclosure: IP67<br>Max.Process Temp.: T4;120°C (248°F), T5;100°C (212°F), T6; 85°C (185°F)<br>Amb. Temp.: -40 to 75°C (-40 to 167°F) for T4, -40 to 80°C (-40 to 176°F) for T5,<br>-40 to 75°C (-40 to 167°F) for T6 | SU2                     |
| TIIS certification                     | TIIS Flameproof Approval, Ex do IIC T4X *3 *5 *7 *8 *10<br>Certificate: TC15296 (Without integral indicator), TC15297 (With integral indicator)<br>Amb. Temp.: -20 to 60°C, Process Temp.: -20 to 120°C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | JF3                     |
|                                        | TIIS Intrinsically safe Approval, Ex ia IIC T4 *6 *8<br>Certificate: TC14632<br>Amb. Temp.: -20 to 60°C, Process Temp.: -20 to 120°C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | JS3                     |
| Attached flameproof packing adapter *5 | Electrical connection: G1/2 female<br>Applicable cable: O. D. 8 to 12 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 1 pc. G11<br>2 pcs. G12 |

\*1: Applicable for Electrical connection code 2, 7 and C (1/2 NPT female).

\*2: (Not used)

\*3: Applicable for Output signal code D and E. For intrinsically safe approval, use the safety barrier certified by the testing laboratories (BARD-400 is not applicable).

\*4: Lower limit of ambient temperature is -15°C (5°F) when /HE is specified.

\*5: If cable wiring is to be used to a TIIS flameproof type transmitter, add the YOKOGAWA-assured flameproof packing adapter.

\*6: Applicable for Output signal code D. See <Safety Barrier for TIIS Intrinsically Safe Type>.

\*7: In case that the ambient temperature exceeds 50°C or that the ambient temperature exceeds 45°C with the process temperature of 90°C or above, use heat-resistant cables with maximum allowable temperature of 75°C or above.

\*8: TIIS (The Technology Institution of Industrial Safety) Certification is a new notation for the explosionproof approval in Japan instead of JIS.

\*9: Applicable for Electrical connection code 2, 4, 7, C and D (1/2 NPT and M20 female).

\*10: Not applicable for Electrical connection code A, C and D.

## ■ OPTIONAL SPECIFICATIONS

| Item                                          |                | Description                                                                                                                                                                                                                                                                                                |                                                                                                   | Code                     |     |  |
|-----------------------------------------------|----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|--------------------------|-----|--|
| Painting *8                                   | Color change   | Amplifier cover only                                                                                                                                                                                                                                                                                       |                                                                                                   | P□                       |     |  |
|                                               |                | Amplifier cover and terminal cover, Munsell 7.5 R4/14                                                                                                                                                                                                                                                      |                                                                                                   | PR                       |     |  |
|                                               | Coating change | Epoxy resin-baked coating *9                                                                                                                                                                                                                                                                               |                                                                                                   | X1                       |     |  |
| 316 SST exterior parts                        |                | Exterior parts on the amplifier housing (name plates, tag plate, zero-adjustment screw, stopper screw) will become 316 SST *10                                                                                                                                                                             |                                                                                                   | HC                       |     |  |
| Fluoro-rubber O-ring                          |                | All O-rings of amplifier housing. Lower limit of ambient temperature: -15°C (5°F) *11                                                                                                                                                                                                                      |                                                                                                   | HE                       |     |  |
| Lightning protector                           |                | Transmitter power supply voltage: 10.5 to 32 V DC ( 10.5 to 28 V DC for TIIS intrinsically safe type, 10.5 to 30 V DC for intrinsically safe type other than TIIS, or 9 to 32 V DC for Fieldbus communicaiton type.)<br>Allowable current: Max. 6000 A ( 1×40 μs ), Repeating 1000 A ( 1×40 μs ) 100 times |                                                                                                   | A                        |     |  |
| Oil-prohibited use                            |                | Degrease cleansing treatment                                                                                                                                                                                                                                                                               |                                                                                                   | K1                       |     |  |
| Oil-prohibited use with dehydrating treatment |                | Degrease cleansing and dehydrating treatment                                                                                                                                                                                                                                                               |                                                                                                   | K5                       |     |  |
| No serration *1                               |                | No serration work on the flange gasket surface (for ANSI flange only )                                                                                                                                                                                                                                     |                                                                                                   | Q                        |     |  |
| Teflon film                                   |                | Diaphragm protection from sticky process fluid by FEP Teflon film attached with fluorinated oil. Operation range: 20 to 150°C, 0 to 2 MPa (Not applicable for vacuum service).                                                                                                                             |                                                                                                   | T                        |     |  |
| Operating temperature correction *2           |                | Adjusting range : 80°C to Maximum temperature of specified fill fluid                                                                                                                                                                                                                                      |                                                                                                   | R                        |     |  |
| Fast response *6                              |                | Update time: 0.125 sec<br>Amplifier assembly damping time constant: 0.1 to 64 sec in 9 increments.<br>Response time (with min. damping time constant): max. 0.3 sec (excluding diaphragm seal units)                                                                                                       |                                                                                                   | F1                       |     |  |
| Failure alarm down-scale *3                   |                | Output status at CPU failure and hardware error is -5%, 3.2 mA or less.                                                                                                                                                                                                                                    |                                                                                                   | C1                       |     |  |
| NAMUR NE43 compliant *3*7                     |                | Output signal limits:<br>3.8 mA to 20.5 mA                                                                                                                                                                                                                                                                 | Failure alarm down-scale: output status at CPU failure and hardware error is -5%, 3.2 mA or less. | C2                       |     |  |
|                                               |                |                                                                                                                                                                                                                                                                                                            | Failure alarm up-scale: output status at CPU failure and hardware error is 110%, 21.6 mA or more. | C3                       |     |  |
|                                               |                |                                                                                                                                                                                                                                                                                                            |                                                                                                   |                          |     |  |
| Data configuration at factory                 |                | Description into "Descriptor" parameter of HART protocol                                                                                                                                                                                                                                                   |                                                                                                   | CA                       |     |  |
| Stainless steel amplifier housing *4          |                | Amplifier housing material: JIS SCS14A stainless steel (equivalent to JIS SUS316 cast stainless steel or ASTM CF-8M)                                                                                                                                                                                       |                                                                                                   | E1                       |     |  |
| Gold-plate                                    |                | Inside of isolating diaphragms(fill fluid side) are gold plated, effective for hydrogen permeation. ( applicable for Wetted parts material code S and H )                                                                                                                                                  |                                                                                                   | A1                       |     |  |
| Wired tag plate                               |                | Stainless steel tag plate wired onto transmitter                                                                                                                                                                                                                                                           |                                                                                                   | N4                       |     |  |
| Capillary without PVC sheaths                 |                | When ambient temperature exceeds 100°C, or use of PVC is prohibited                                                                                                                                                                                                                                        |                                                                                                   | V                        |     |  |
| Calibration units *5                          |                | P calibration ( psi unit )                                                                                                                                                                                                                                                                                 |                                                                                                   | D1                       |     |  |
|                                               |                | bar calibration ( bar unit )                                                                                                                                                                                                                                                                               |                                                                                                   | D3                       |     |  |
|                                               |                | M calibration (kgf/cm <sup>2</sup> unit )                                                                                                                                                                                                                                                                  |                                                                                                   | D4                       |     |  |
| Sealing treatment to JIS SUS630 nuts          |                | Sealant(liquid silicone rubber) is coated on JIS SUS630 cover flange mounting nuts against stress corrosion cracking.                                                                                                                                                                                      |                                                                                                   | Y                        |     |  |
| Mill Certificate                              |                | Process flange, Block                                                                                                                                                                                                                                                                                      |                                                                                                   | For model EJA438W<br>M05 |     |  |
|                                               |                | Process flange, Block, Pipe, Base                                                                                                                                                                                                                                                                          |                                                                                                   | For model EJA438N<br>M06 |     |  |
| Pressure test/ Leak test Certificate *12      | For A-capsule  | (Flange rating)                                                                                                                                                                                                                                                                                            | (Test pressure)                                                                                   | (Applicable model)       |     |  |
|                                               |                | JIS 10K                                                                                                                                                                                                                                                                                                    | 2 MPa {20 kgf/cm <sup>2</sup> }                                                                   | EJA438W/EJA438N          | T41 |  |
|                                               |                | JIS 20K                                                                                                                                                                                                                                                                                                    | 3 MPa {30 kgf/cm <sup>2</sup> }                                                                   |                          | T42 |  |
|                                               |                | JIS 40K                                                                                                                                                                                                                                                                                                    | 3 MPa {30 kgf/cm <sup>2</sup> }                                                                   |                          | T43 |  |
|                                               |                | JIS 63K                                                                                                                                                                                                                                                                                                    | 3 MPa {30 kgf/cm <sup>2</sup> }                                                                   |                          | T45 |  |
|                                               |                | ANSI/JPI Class 150                                                                                                                                                                                                                                                                                         | 3 MPa {29.8 kgf/cm <sup>2</sup> }                                                                 | EJA438W/EJA438N          | T46 |  |
|                                               |                | ANSI/JPI Class 300                                                                                                                                                                                                                                                                                         | 3 MPa {30 kgf/cm <sup>2</sup> }                                                                   |                          | T47 |  |
|                                               |                | ANSI/JPI Class 600                                                                                                                                                                                                                                                                                         | 3 MPa {30 kgf/cm <sup>2</sup> }                                                                   |                          | T49 |  |
|                                               | For B-capsule  | JIS 10K                                                                                                                                                                                                                                                                                                    | 2 MPa {20 kgf/cm <sup>2</sup> }                                                                   | EJA438W/EJA438N          | T31 |  |
|                                               |                | JIS 20K                                                                                                                                                                                                                                                                                                    | 5 MPa {50 kgf/cm <sup>2</sup> }                                                                   |                          | T32 |  |
|                                               |                | JIS 40K                                                                                                                                                                                                                                                                                                    | 10 MPa {100 kgf/cm <sup>2</sup> }                                                                 | EJA438W                  | T33 |  |
|                                               |                | JIS 40K                                                                                                                                                                                                                                                                                                    | 7 MPa {70 kgf/cm <sup>2</sup> }                                                                   | EJA438N                  | T34 |  |
|                                               |                | JIS 63K                                                                                                                                                                                                                                                                                                    | 14 MPa {140 kgf/cm <sup>2</sup> }                                                                 | EJA438W                  | T35 |  |
|                                               |                | ANSI/JPI Class 150                                                                                                                                                                                                                                                                                         | 3 MPa {29.8 kgf/cm <sup>2</sup> }                                                                 | EJA438W/EJA438N          | T36 |  |
|                                               |                | ANSI/JPI Class 300                                                                                                                                                                                                                                                                                         | 7.7 MPa {77 kgf/cm <sup>2</sup> }                                                                 | EJA438W                  | T37 |  |
|                                               |                | ANSI/JPI Class 300                                                                                                                                                                                                                                                                                         | 7 MPa {70 kgf/cm <sup>2</sup> }                                                                   | EJA438N                  | T38 |  |
|                                               |                | ANSI/JPI Class 600                                                                                                                                                                                                                                                                                         | 14 MPa {140 kgf/cm <sup>2</sup> }                                                                 | EJA438W                  | T39 |  |
|                                               |                | Nitrogen ( N <sub>2</sub> ) Gas *13<br>Retention time:<br>10 minutes                                                                                                                                                                                                                                       |                                                                                                   |                          |     |  |


- \*1: This item cannot be applied to model EJA438W Wetted part material code H, T, or U, whose gasket contact surface are not serrated as standard specifications.
- \*2: Specify the process operating temperature for zero correction. Example: Zero correction by process temperature 90°C.
- \*3: Applicable for Output signal code D and E. The hardware error indicates faulty amplifier or capsule.  
When combining with Option code F1, output status for down-scale is -2.5%, 3.6 mA DC or less.
- \*4: Applicable for Electrical connection code 2, 3, 4, A, C and D. Not applicable for Option code P□, X1, and JF3.
- \*5: The unit of MWP (Max. working pressure) on name plate of a housing is the same unit as specified by Option code D1, D3, and D4.
- \*6: Applicable for Output signal code D and E. Write protection switch is attached for Output code E. Not applicable for Integral indicator code E.
- \*7: Not applicable for Option code C1.
- \*8: Standard polyurethan painting can be used in acid atmosphere, whereas the epoxy resin-baked coating (Option code X1) can be used in alkaline atmosphere. Anti-corrosion coating, the combination of polyurethan and epoxy resin-baked coating, is available by special order as sea water, alkaline, and acid resistant.
- \*9: Not applicable for color change option.
- \*10: 316 or 316L SST. The specification is included in option code /E1. Not applicable with option code /JF3.
- \*11: Not applicable with option code /JF3.
- \*12: The unit on the certificate is always MPa regardless of selection of option code D1, D3, or D4.
- \*13: Pure nitrogen gas is used for oil-prohibited use (Option code K1 and K5).

**Table 4. Calibration Units**

|         |   | Measurement<br>Span and Range | Optional Code   |                 |                                 |
|---------|---|-------------------------------|-----------------|-----------------|---------------------------------|
|         |   |                               | D1 ( psi Unit ) | D3 ( bar Unit ) | D4 ( kgf/cm <sup>2</sup> Unit ) |
| EJA438W | A | Span                          | 8.6 to 430 psi  | 0.6 to 30 mbar  | 0.6 to 30 kgf/cm <sup>2</sup>   |
|         |   | Range                         | -15 to 430 psi  | -1 to 30 mbar   | -1 to 30 kgf/cm <sup>2</sup>    |
|         | B | Span                          | 66 to 2000 psi  | 4.6 to 140 mbar | 4.6 to 140 kgf/cm <sup>2</sup>  |
|         |   | Range                         | -15 to 2000 psi | -1 to 140 mbar  | -1 to 140 kgf/cm <sup>2</sup>   |
| EJA438N | A | Span                          | 8.6 to 430 psi  | 0.6 to 30 mbar  | 0.6 to 30 kgf/cm <sup>2</sup>   |
|         |   | Range                         | -15 to 430 psi  | -1 to 30 mbar   | -1 to 30 kgf/cm <sup>2</sup>    |
|         | B | Span                          | 66 to 1000 psi  | 4.6 to 70 mbar  | 4.6 to 70 kgf/cm <sup>2</sup>   |
|         |   | Range                         | -15 to 1000 psi | -1 to 70 mbar   | -1 to 70 kgf/cm <sup>2</sup>    |

## DIMENSIONS

### Model EJA438W

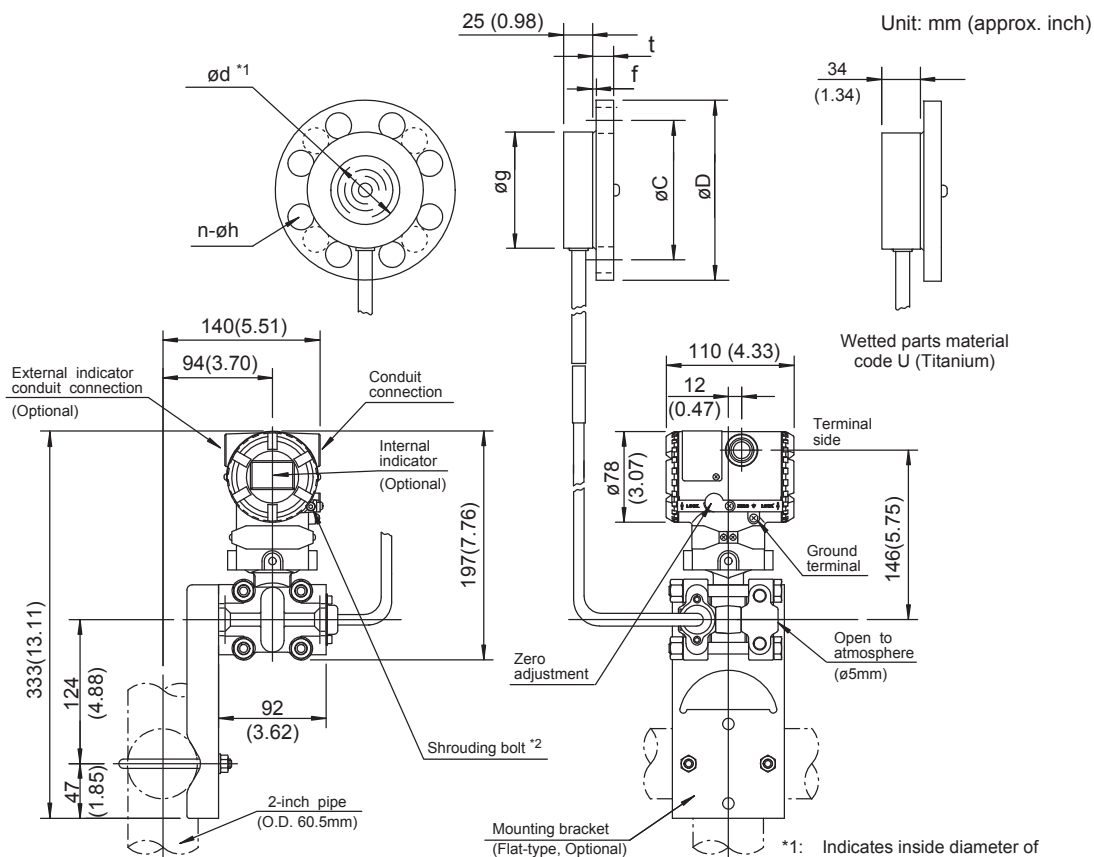

Process flange size : 3 inch (80 mm)

| Flange Rating  | øD          | øC          | øg        | ød       | t          | f *       | n | øh         |
|----------------|-------------|-------------|-----------|----------|------------|-----------|---|------------|
| JIS 10K        | 185(7.28)   | 150(5.91)   | 130(5.12) | 90(3.54) | 18(0.71)   | 0         | 8 | 19(0.75)   |
| JIS 20K        | 200(7.87)   | 160(6.30)   | 130(5.12) | 90(3.54) | 22(0.87)   | 0         | 8 | 23(0.91)   |
| JIS 40K        | 210(8.27)   | 170(6.69)   | 130(5.12) | 90(3.54) | 32(1.26)   | 0         | 8 | 23(0.91)   |
| JIS 63K        | 230(9.06)   | 185(7.28)   | 130(5.12) | 90(3.54) | 40(1.57)   | 0         | 8 | 25(0.98)   |
| ANSI Class 150 | 190.5(7.50) | 152.4(6)    | 130(5.12) | 90(3.54) | 23.9(0.94) | 1.6(0.06) | 4 | 19.1(0.75) |
| ANSI Class 300 | 209.6(8.25) | 168.1(6.62) | 130(5.12) | 90(3.54) | 28.5(1.12) | 1.6(0.06) | 8 | 22.4(0.88) |
| ANSI Class 600 | 209.6(8.25) | 168.1(6.62) | 130(5.12) | 90(3.54) | 38.2(1.50) | 6.4(0.25) | 8 | 22.4(0.88) |
| JPI Class 150  | 190(7.48)   | 152.4(6)    | 130(5.12) | 90(3.54) | 24(0.94)   | 1.6(0.06) | 4 | 19(0.75)   |
| JPI Class 300  | 210(8.27)   | 168.1(6.62) | 130(5.12) | 90(3.54) | 28.5(1.12) | 1.6(0.06) | 8 | 22(0.87)   |
| JPI Class 600  | 210(8.27)   | 168.1(6.62) | 130(5.12) | 90(3.54) | 38.4(1.51) | 6.4(0.25) | 8 | 22(0.87)   |
| DIN PN 10/16   | 200(7.78)   | 160(6.30)   | 130(5.12) | 90(3.54) | 20(0.79)   | 0         | 8 | 18(0.71)   |
| DIN PN 25/40   | 200(7.78)   | 160(6.30)   | 130(5.12) | 90(3.54) | 24(0.94)   | 0         | 8 | 18(0.71)   |
| DIN PN 64      | 215(8.46)   | 170(6.69)   | 130(5.12) | 90(3.54) | 28(1.10)   | 0         | 8 | 22(0.87)   |

Process flange size : 2 inch (50 mm)

| Flange Rating  | øD          | øC          | øg        | ød       | t          | f *       | n | øh         |
|----------------|-------------|-------------|-----------|----------|------------|-----------|---|------------|
| JIS 10K        | 155(6.10)   | 120(4.72)   | 100(3.94) | 61(2.40) | 16(0.63)   | 0         | 4 | 19(0.75)   |
| JIS 20K        | 155(6.10)   | 120(4.72)   | 100(3.94) | 61(2.40) | 18(0.71)   | 0         | 8 | 19(0.75)   |
| JIS 40K        | 165(6.50)   | 130(5.12)   | 100(3.94) | 61(2.40) | 26(1.02)   | 0         | 8 | 19(0.75)   |
| JIS 63K        | 185(7.28)   | 145(5.12)   | 100(3.94) | 61(2.40) | 34(1.34)   | 0         | 8 | 23(0.91)   |
| ANSI Class 150 | 152.4(6.00) | 120.7(4.75) | 100(3.94) | 61(2.40) | 19.1(0.75) | 1.6(0.06) | 4 | 19.1(0.75) |
| ANSI Class 300 | 165.1(6.50) | 127.0(5.00) | 100(3.94) | 61(2.40) | 22.4(0.88) | 1.6(0.06) | 8 | 19.1(0.75) |
| ANSI Class 600 | 165.1(6.50) | 127.0(5.00) | 100(3.94) | 61(2.40) | 31.8(1.25) | 6.4(0.25) | 8 | 19.1(0.75) |
| JPI Class 150  | 152(6.10)   | 120.6(4.75) | 100(3.94) | 61(2.40) | 19.5(0.77) | 1.6(0.06) | 4 | 19(0.75)   |
| JPI Class 300  | 165(6.50)   | 127.0(5.00) | 100(3.94) | 61(2.40) | 22.5(0.89) | 1.6(0.06) | 8 | 19(0.75)   |
| JPI Class 600  | 165(6.50)   | 127.0(5.00) | 100(3.94) | 61(2.40) | 31.9(1.26) | 6.4(0.25) | 8 | 19(0.75)   |
| DIN PN 10/16   | 165(6.50)   | 125(4.92)   | 100(3.94) | 61(2.40) | 18(0.71)   | 0         | 4 | 18(0.71)   |
| DIN PN 25/40   | 165(6.50)   | 125(4.92)   | 100(3.94) | 61(2.40) | 20(0.78)   | 0         | 4 | 18(0.71)   |
| DIN PN 64      | 180(7.09)   | 135(5.31)   | 100(3.94) | 61(2.40) | 26(1.02)   | 0         | 4 | 22(0.87)   |


\* In case where process flange material is JIS S25C, value of f is 0.

\*1: Indicates inside diameter of gasket contact surface.

\*2: Applicable only for ATEX, IECEx, and TIIS Flameproof type.

F04E.ai

# ● Model EJA438N

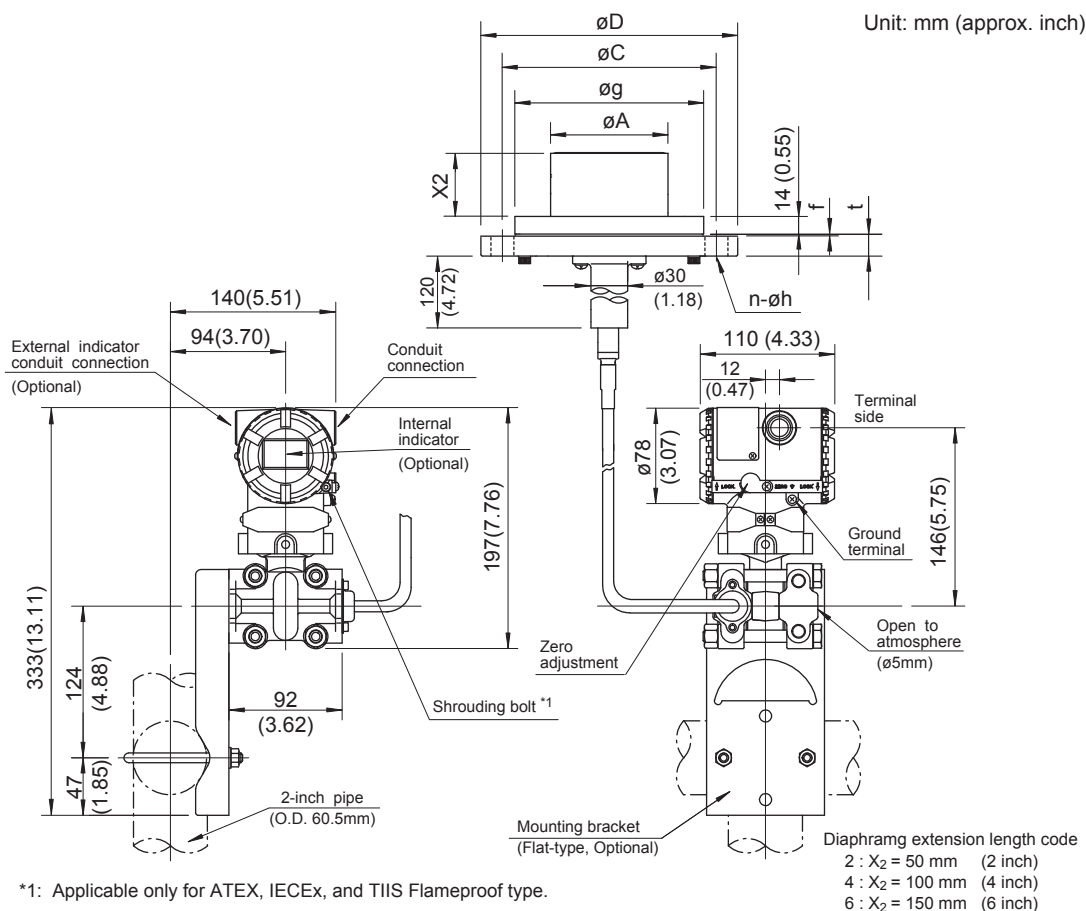

Process flange size : 4 inch (100 mm)

| Flange Rating  | $\phi D$    | $\phi C$    | $\phi g$  | $\phi A$           | $t$        | $f^*$     | $n$ | $\phi h$   |
|----------------|-------------|-------------|-----------|--------------------|------------|-----------|-----|------------|
| JIS 10K        | 210(8.72)   | 175(6.89)   | 155(6.10) | 96 $\pm$ 0.5(3.78) | 18(0.71)   | 0         | 8   | 19(0.75)   |
| JIS 20K        | 225(8.86)   | 185(7.28)   | 155(6.10) | 96 $\pm$ 0.5(3.78) | 24(0.94)   | 0         | 8   | 23(0.91)   |
| JIS 40K        | 250(9.84)   | 205(8.07)   | 155(6.10) | 96 $\pm$ 0.5(3.78) | 36(1.42)   | 0         | 8   | 25(0.98)   |
| ANSI Class 150 | 228.6(9.00) | 190.5(7.50) | 155(6.10) | 96 $\pm$ 0.5(3.78) | 23.9(0.94) | 1.6(0.06) | 8   | 19.1(0.75) |
| ANSI Class 300 | 254(10.00)  | 200.2(7.88) | 155(6.10) | 96 $\pm$ 0.5(3.78) | 31.8(1.25) | 1.6(0.06) | 8   | 22.4(0.88) |
| JPI Class 150  | 229(9.02)   | 190.5(7.50) | 155(6.10) | 96 $\pm$ 0.5(3.78) | 24(0.94)   | 1.6(0.06) | 8   | 19(0.75)   |
| JPI Class 300  | 254(10.00)  | 200.2(7.88) | 155(6.10) | 96 $\pm$ 0.5(3.78) | 32(1.26)   | 1.6(0.06) | 8   | 22(0.87)   |
| DIN PN 10/16   | 220(8.66)   | 180(7.09)   | 155(6.10) | 96 $\pm$ 0.5(3.78) | 20(0.79)   | 0         | 8   | 18(0.71)   |
| DIN PN 25/40   | 235(9.25)   | 190(7.48)   | 155(6.10) | 96 $\pm$ 0.5(3.78) | 24(0.94)   | 0         | 8   | 22(0.87)   |


Process flange size : 3 inch (80 mm)

| Flange Rating  | $\phi D$    | $\phi C$    | $\phi g$  | $\phi A$           | $t$        | $f^*$     | $n$ | $\phi h$   |
|----------------|-------------|-------------|-----------|--------------------|------------|-----------|-----|------------|
| JIS 10K        | 185(7.28)   | 150(5.91)   | 130(5.12) | 71 $\pm$ 0.5(2.80) | 18(0.71)   | 0         | 8   | 19(0.75)   |
| JIS 20K        | 200(7.87)   | 160(6.30)   | 130(5.12) | 71 $\pm$ 0.5(2.80) | 22(0.87)   | 0         | 8   | 23(0.91)   |
| JIS 40K        | 210(8.27)   | 170(6.69)   | 130(5.12) | 71 $\pm$ 0.5(2.80) | 32(1.26)   | 0         | 8   | 23(0.91)   |
| ANSI Class 150 | 190.5(7.50) | 152.4(6)    | 130(5.12) | 71 $\pm$ 0.5(2.80) | 23.9(0.94) | 1.6(0.06) | 4   | 19.1(0.75) |
| ANSI Class 300 | 209.6(8.25) | 168.1(6.62) | 130(5.12) | 71 $\pm$ 0.5(2.80) | 28.5(1.12) | 1.6(0.06) | 8   | 22.4(0.88) |
| JPI Class 150  | 190(7.48)   | 152.4(6)    | 130(5.12) | 71 $\pm$ 0.5(2.80) | 24(0.94)   | 1.6(0.06) | 4   | 19(0.75)   |
| JPI Class 300  | 210(8.27)   | 168.1(6.62) | 130(5.12) | 71 $\pm$ 0.5(2.80) | 28.5(1.12) | 1.6(0.06) | 8   | 22(0.87)   |
| DIN PN 10/16   | 200(7.78)   | 160(6.30)   | 130(5.12) | 71 $\pm$ 0.5(2.80) | 20(0.79)   | 0         | 8   | 18(0.71)   |
| DIN PN 25/40   | 200(7.78)   | 160(6.30)   | 130(5.12) | 71 $\pm$ 0.5(2.80) | 24(0.94)   | 0         | 8   | 18(0.71)   |

\* In case where process flange material is JIS S25C, value of  $f$  is 0.

F05E.ai

### • Terminal Configuration

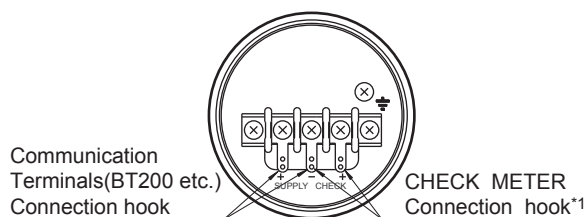

### • Terminal Wiring

|        |                                                |                                         |
|--------|------------------------------------------------|-----------------------------------------|
| SUPPLY | $\begin{smallmatrix} + \\ - \end{smallmatrix}$ | Power supply and output terminal        |
| CHECK  | $\begin{smallmatrix} + \\ - \end{smallmatrix}$ | External indicator (ammeter) terminal*1 |
|        | $\text{---}\perp\text{---}$                    | Ground terminal                         |

\*1: When using an external indicator or a check meter, the internal resistance must be 10Ω or less.  
Not available for Fieldbus communication (Output signal code F and G).

F06E.ai

### < Ordering Information > “◇”

Specify the following when ordering

1. Model, suffix codes, and optional codes
2. Calibration range and units:
  - 1) Calibration range can be specified with range value specifications up to 5 digits (excluding any decimal point) for low or high range limits within the range of -32000 to 32000.
  - 2) Specify only one unit from the table 'Settings when shipped.'
3. Select normal or reverse for operation mode  
Note: If not specified, the instrument is shipped in normal operation mode.
4. Display scale and units (for transmitters equipped with integral indicator only)  
Specify either 0 to 100 % or engineering unit scale and 'Range and Unit' for engineering units scale:  
Scale range can be specified with range limit specifications up to 5 digits (excluding any decimal point) for low or high range limits within the range of -19999 to 19999.
5. Tag Number (if required)
6. Process fluid temperature for zero compensation (if required)

### < Related Instruments > “◇”

Power Distributor: Refer to GS 01B04T01-02E or GS 01B04T02-02E

BRAIN TERMINAL: Refer to GS 01C00A11-00E

### < Safety Barrier for TIIS Intrinsically Safe Type >

| Supplier | Type     | Model                  |
|----------|----------|------------------------|
| MTL      | Isolator | MTL3046B               |
|          |          | MTL4041B               |
| P+F      |          | KFD2-STC3-Ex 1         |
|          |          | KFD2-STV3-Ex 1-1, 2, 3 |

Note: Requirements of capacitance and inductance for cable wiring.

$$C_w \leq C_o - 11[\text{nF}]$$

$$L_w \leq L_o - 730[\mu\text{H}]$$

(Co: Max. external capacitance)

(Lo: Max. external inductance)

### < Reference >

1. JIS SUS316L stainless steel; Equivalent to AISI 316L.
2. JIS SUS316 stainless steel; Equivalent to AISI 316.
3. JIS SUS304 stainless steel; Equivalent to AISI 304.
4. JIS S25C carbon steel; Equivalent to AISI 1025.
5. JIS SECC; Carbon steel.
6. Teflon; Trademark of E.I. duPont de Nemours & Co.
7. JIS SCM435 chrome molybdenum steel; Equivalent to AISI 4137.
8. JIS SUS630 stainless steel; Equivalent to ASTM 630.
9. Hastelloy; Trademark of Haynes International Inc.
10. JIS SCS14A stainless steel; Equivalent to JIS SUS316 cast stainless steel or ASTM CF-8M.
11. HART; Trademark of the HART Communication Foundation.
12. FOUNDATION; Trademark of Fieldbus Foundation.
13. PROFIBUS; Registered trademark of Profibus Nutzerorganisation e.v., Karlsruhe, Germany.
14. Other company names and product names used in this material are registered trademarks or trademarks of their respective owners.

CE marking is not applied to the product from the end of February 2016.