


# SB9233



## Flow meter with integrated backflow prevention and display

SBG34KL0FRKG

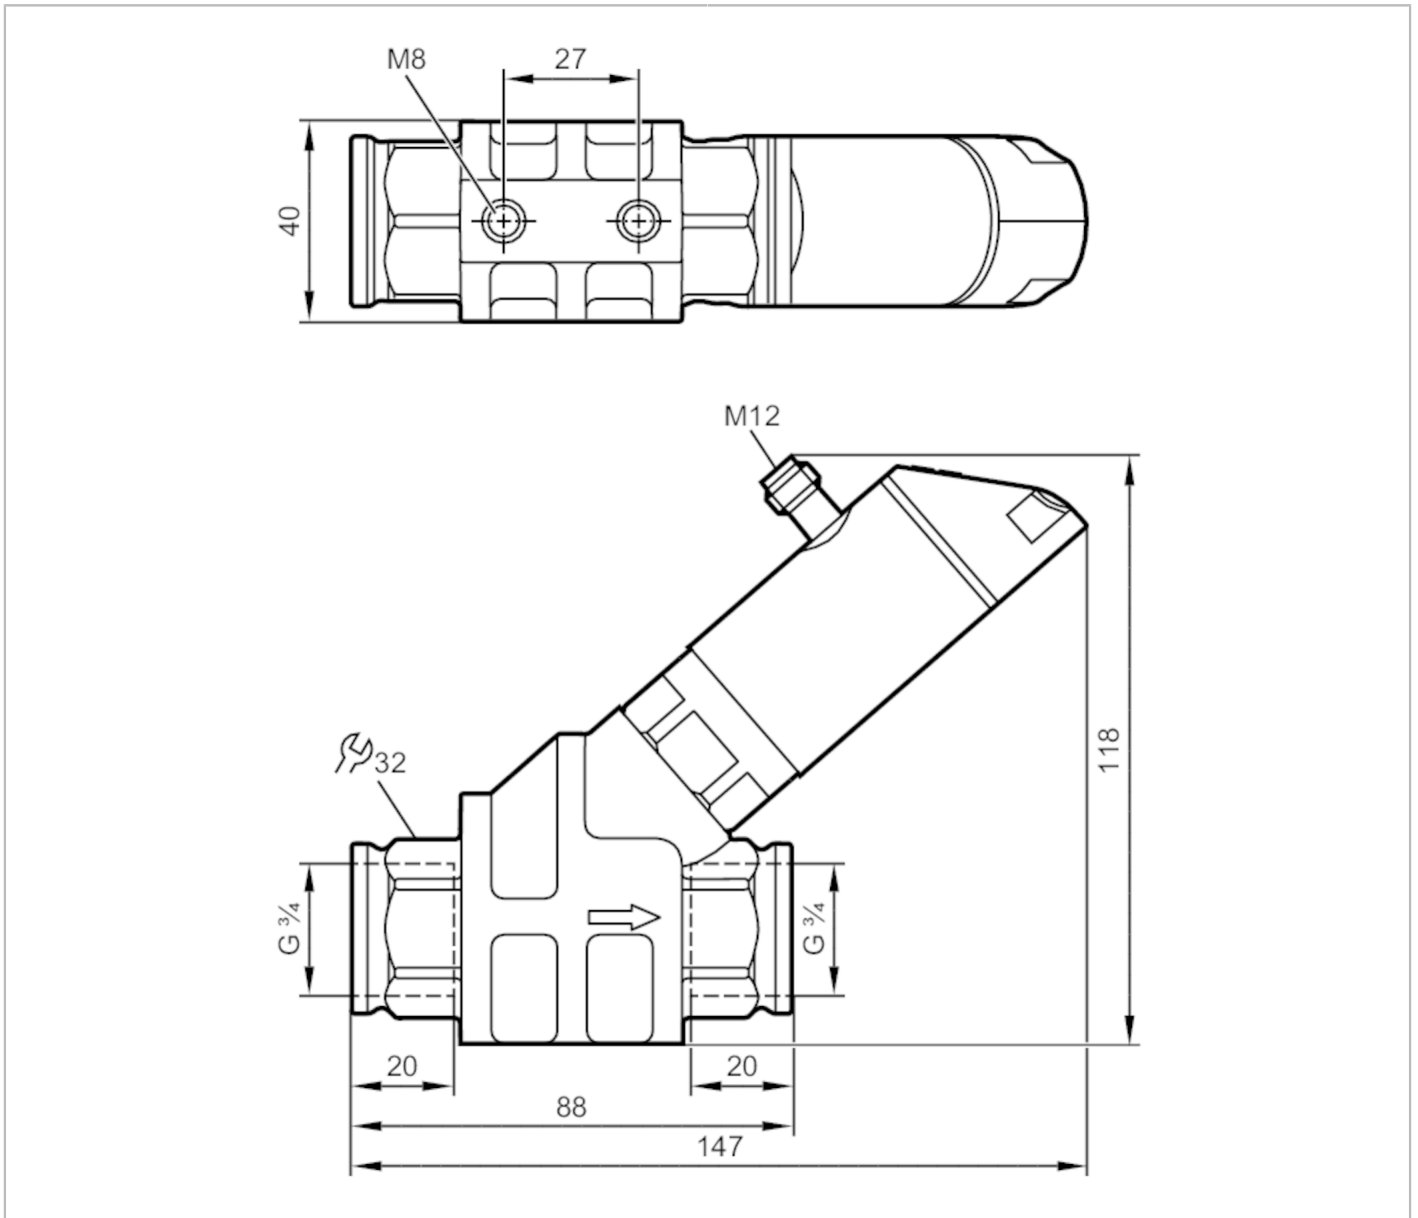

Product characteristics				
Measuring range	0.5...25 l/min	0.03...1.5 m <sup>3</sup> /h	8...396.5 gph	0.13...6.6 gpm
Process connection	threaded connection G 3/4 internal thread			
Application				
Special feature	Gold-plated contacts			
Media	Liquids; oils (viscosity 32 mm <sup>2</sup> /s at 40 °C)			
Medium temperature	[°C]	-10...100		
Pressure rating	100 bar	10 MPa		
Note on pressure rating	at medium temperature >70°C: 80 bar / 8 MPa			
Electrical data				
Operating voltage	[V]	18...30 DC; (to SELV/PELV)		
Current consumption	[mA]	< 50		



## Flow meter with integrated backflow prevention and display

SBG34KL0FRKG

Protection class	III
Reverse polarity protection	yes
Power-on delay time [s]	< 3

### Outputs

Total number of outputs	2
Output signal	switching signal; analogue signal; frequency signal; IO-Link
Output function	parameterisable
Max. voltage drop switching output DC [V]	2
Max. current load per output [mA]	150; (200: ...60 °C; Ambient temperature; 250: ...40 °C; Ambient temperature)
Analogue current output [mA]	4...20
Max. load [Ω]	500
Short-circuit protection	yes
Overload protection	yes
Frequency of the output [Hz]	0...10000

### Measuring/setting range

Measuring range	0.5...25 l/min	0.03...1.5 m³/h	8...396.5 gph	0.13...6.6 gpm
Display range	0...30 l/min	0...1.8 m³/h	0...475.5 gph	0...7.93 gpm
Resolution	0.01 l/min	0.001 m³/h	0.1 gph	0.01 gpm
Set point SP	0.16...25 l/min	0.01...1.5 m³/h	2.5...396 gph	0.04...6.6 gpm
Reset point rP	0...24.84 l/min	0...1.49 m³/h	0...393.5 gph	0...6.56 gpm
Frequency end point, FEP	1.66...25 l/min	0.1...1.5 m³/h	26.5...396 gph	0.44...6.6 gpm
In steps of	0.02 l/min	0.002 m³/h	0.5 gph	0.01 gpm
Frequency at the end point FRP [Hz]	10...10000			
In steps of [Hz]	10			
Measuring dynamics	1:50			

### Temperature monitoring

Measuring range	-10...100 °C	14...212 °F
Display range	-32...122 °C	-25.6...251.6 °F
Resolution	0.1 °C	0.1 °F
Set point SP	-9.3...100 °C	15.2...212 °F
Reset point rP	-10...99.3 °C	14...210.8 °F
In steps of	0.1 °C	0.2 °F
Frequency start point, FSP	-10...78 °C	14...172.4 °F
Frequency end point, FEP	12...100 °C	53.6...212 °F
Frequency at the end point FRP [Hz]	10...10000	
In steps of [Hz]	10	

### Accuracy / deviations

Flow monitoring	
Accuracy (in the measuring range)	± 5 % MEW; (Q > 1 l/min; 20...70 °C Medium temperature)
Repeatability	± 1 % MEW
Temperature monitoring	
Temperature drift	0,029 °C / K



## Flow meter with integrated backflow prevention and display

SBG34KL0FRKG

Accuracy	[K]	3 K (25°C; Q > 1 l/min)	
<b>Response times</b>			
Flow monitoring			
Response time	[s]	0.01	
Damping process value dAP	[s]	0...5	
In steps of	[s]	0.1	
Damping for the analogue output dAA	[s]	0...5	
In steps of	[s]	0.1	
Temperature monitoring			
Dynamic response T05 / T09	[s]	T09 = 120 (Q > 1 l/min)	
<b>Software / programming</b>			
Parameter setting options	hysteresis / window; normally open / normally closed; switching logic; current/frequency output; damping for the switching output / analogue output; display can be rotated and switched off; standard unit of measurement; process value colour; calibration factor		
<b>Interfaces</b>			
Communication interface	IO-Link		
Transmission type	COM2 (38,4 kBaud)		
IO-Link revision	1.1		
SDCI standard	IEC 61131-9 CDV		
Profiles	Smart Sensor: Process Data Variable; Device Identification, Device Diagnosis		
SIO mode	yes		
Required master port type	A		
Process data analogue	2		
Process data binary	2		
Min. process cycle time	[ms]	3.2	
Supported DeviceIDs	<b>Type of operation</b>	<b>DeviceID</b>	
	default		1044
<b>Operating conditions</b>			
Ambient temperature	[°C]	0...60	
Note on ambient temperature	medium temperature < 80 °C medium temperature < 100 °C: 0...40 °C		
Storage temperature	[°C]	-15...80	
Protection	IP 65; IP 67		
<b>Tests / approvals</b>			
EMC	DIN EN 61000-6-2		
	DIN EN 61000-6-3		
Shock resistance	DIN EN 60068-2-27		20 g (11 ms)
Vibration resistance	DIN EN 60068-2-6		5 g (10...2000 Hz)
MTTF	[years]	145	
UL approval	UL Approval no.		I005
Pressure Equipment Directive	Sound engineering practice		
<b>Mechanical data</b>			
Weight	[g]	997	

# SB9233



## Flow meter with integrated backflow prevention and display

SBG34KL0FRKG

Materials	stainless steel (316L/1.4404); PBT+PC-GF30; PBT-GF20; PC; brass chemically nickel-plated
Materials (wetted parts)	stainless steel (316 / 1.4401); stainless steel (316L/1.4404); brass (2.0371); brass chemically nickel-plated; PPS; O-ring: FKM
Process connection	threaded connection G 3/4 internal thread
Switching cycles mechanical	10 million

### Displays / operating elements


Display	Display unit	6 x LED, green
	switching status	2 x LED, yellow
	measured values	alphanumeric display, red/green alternating indication 4-digit
	programming	alphanumeric display, 4-digit

### Remarks

Remarks	Recommendation: use a 200-micron filter.
	All data refer to oil with the following nominal viscosity: 32 cSt, 40 °C ± 3 K
	MW = measured value
	MEW = Final value of the measuring range
Pack quantity	1 pcs.

### Electrical connection

Connector: 1 x M12; coding: A; Contacts: gold-plated






## Flow meter with integrated backflow prevention and display

SBG34KL0FRKG

### Connection

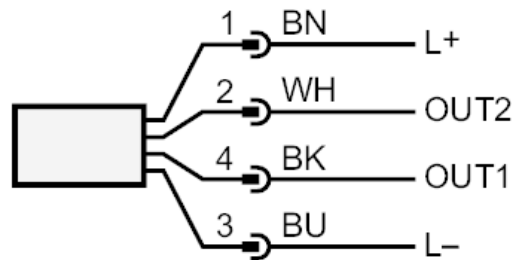

#### OUT1:

- switching output volumetric flow quantity monitoring
- switching output Temperature monitoring
- frequency output volumetric flow quantity monitoring
- frequency output Temperature monitoring
- IO-Link

#### OUT2:

- switching output volumetric flow quantity monitoring
- switching output Temperature monitoring
- analogue output volumetric flow quantity monitoring
- analogue output Temperature monitoring
- colours to DIN EN 60947-5-2

Core colours :

- BK = black
- BN = brown
- BU = blue
- WH = white

### Diagrams and graphs

